LATERAL 270, MAIN 5, SANITARY SEWER NO. 22

PROJ. NO. 468-83666

OCA NO. 744004

CITY OF WICHITA, KANSAS

NEIL D. CABLE, PE - CITY ENGINEER


GENERAL NOTES:


1. ALL CONSTRUCTION AND MATERIAL TO COMPLY WITH CITY OF WICHITA SPECIFICATIONS AND STANDARDS.
2. THE CONTRACTOR SHALL NOTIFY THE UTILITY SERVICE COMPANIES TO FLAG THEIR UNDERGROUND LINES AND REQUEST ANY OVERHEAD POLE/LINE ADJUSTMENTS 48 HOURS PRIOR TO CONSTRUCTION.

   KANSAS ONE-CALL 1-800-344-7233
3. THE UNDERGROUND UTILITY SERVICE LINES AND OVERHEAD UTILITY POLE LINES ARE TO BE ADJUSTED AS NECESSARY BY OTHERS PRIOR TO CONSTRUCTION UNLESS THE PLANS SPECIFICALLY CALL FOR THEIR ADJUSTMENT BY THE CONTRACTOR. EXISTING UTILITIES AND THEIR LOCATION, AS SHOWN ON THE PLANS, REPRESENT THE BEST INFORMATION OBTAINABLE FOR DESIGN. LOCATION INFORMATION HAS BEEN OBTAINED FROM THE VARIOUS UTILITY COMPANIES AND IS EITHER FROM COMPANY RECORD DRAWINGS OR COMPANY PROVIDED FIELD LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO WORK AROUND EXISTING UTILITIES WITHIN THE RIGHT-OF-WAY WHICH DO NOT CONFLICT WITH PROPOSED CONSTRUCTION.
4. THE CONTRACTOR SHALL GIVE ALL PROPERTY OWNERS AND/OR TENANTS DIRECTLY AFFECTED BY THE CONSTRUCTION OF THIS PROJECT A MINIMUM OF FIVE (5) DAYS ADVANCE WRITTEN NOTICE PRIOR TO START OF CONSTRUCTION.
5. ANY TREE OR SHRUB REMOVAL MUST BE APPROVED BY THE FIELD ENGINEER.
6. THE CONTRACTOR SHOULD EXAMINE THE CONSTRUCTION SITE PRIOR TO BIDDING AND BE SATISFIED AS TO THE WORK SHOWN FOR COMPLETION.
7. ANY FENCE REMOVED DURING CONSTRUCTION MUST BE REPLACED AND RESTORED TO ORIGINAL CONDITION.
8. UTILITY EASEMENT AND FENCE RESTORATION SHALL BE SUSPENDED FOR THREE WEEKS FROM THE DATE THE SEWER IS TESTED AND ACCEPTED BY THE ENGINEERING DIVISION, DEPARTMENT OF PUBLIC WORKS, TO ALLOW PROPERTY OWNERS TIME TO INSTALL HOOKUPS TO THE SEWER MAIN. CONTRACTORS SHALL NOTIFY PROPERTY OWNERS, IN WRITING, OF THIS AGGREMENT.

INDEX OF SHEETS


SHEET 1 – TITLE SHEET
SHEET 2 – PLAN/PROFILE

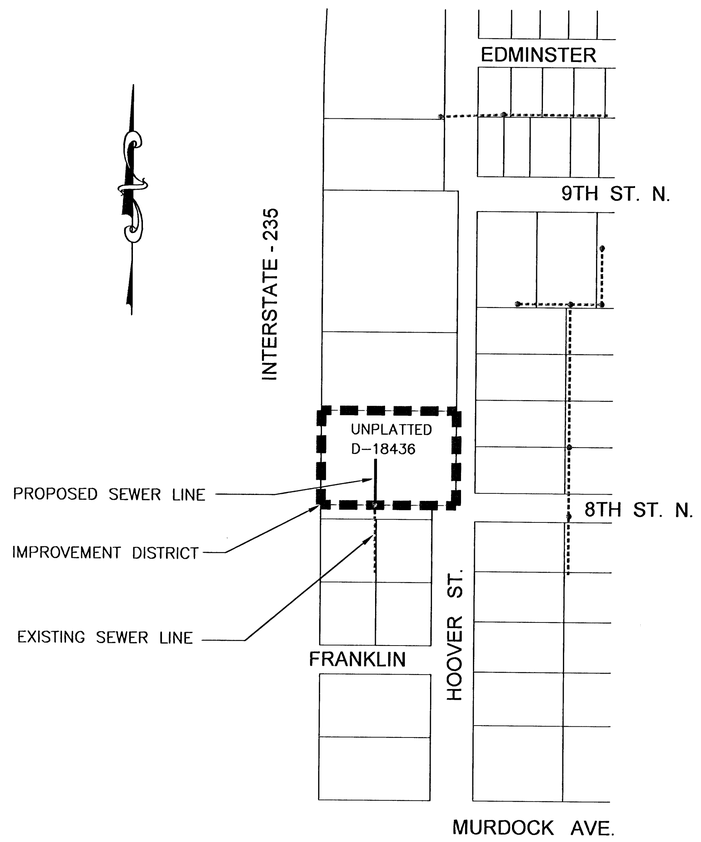

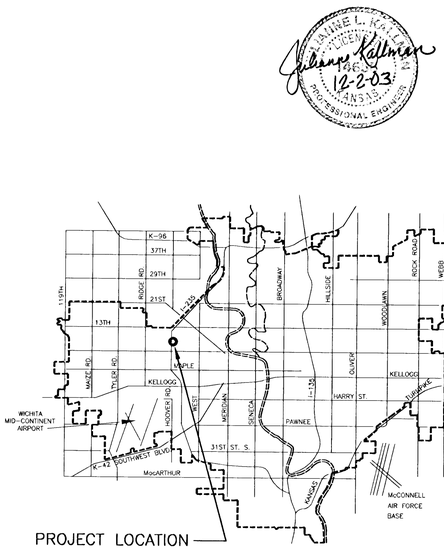

VICINITY MAP


Per Plan
R.D.C
3/5/04
.PDF

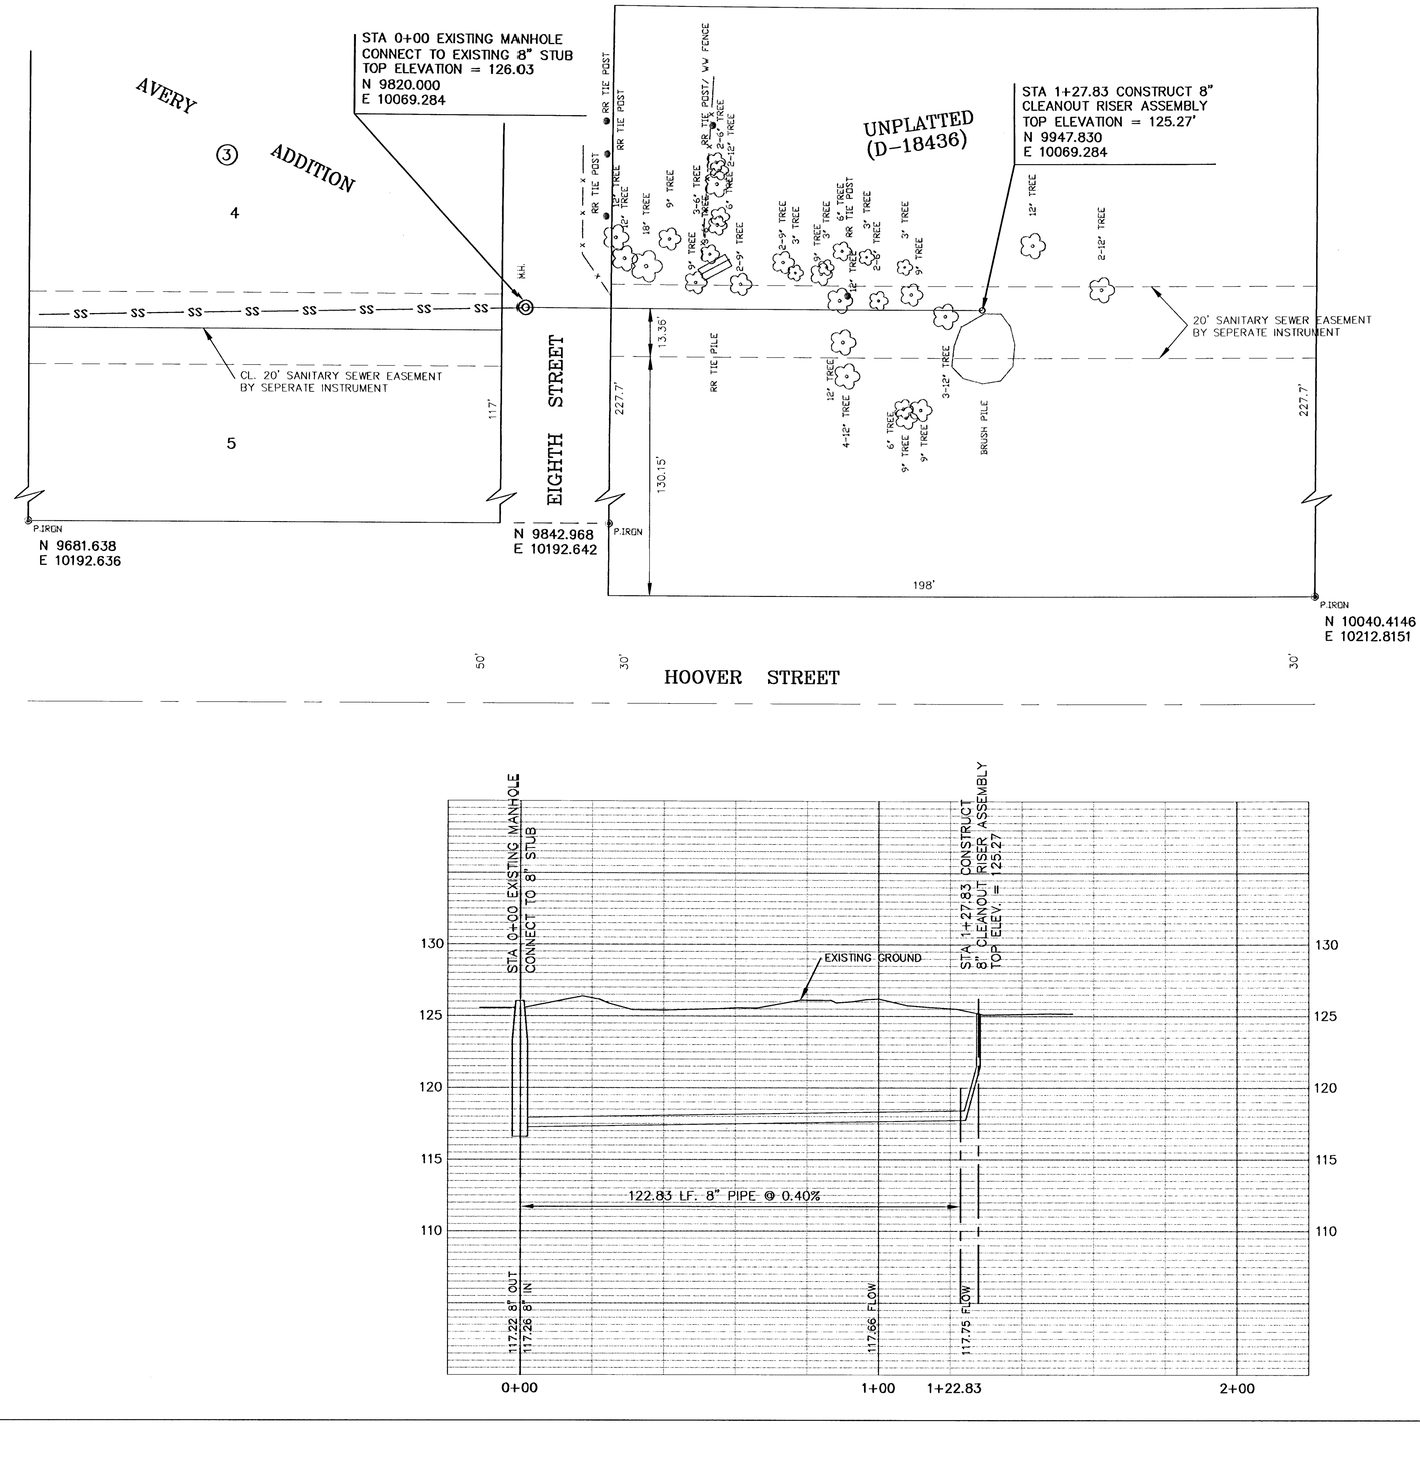

SCALE: PLAN 1" = 20'
PROFILE HORZ. 1" = 20'
VERT. 1" = 5'

BM. CITY STD. DISC, 34 FT. EAST AND 42' SOUTH OF THE CENTER LINE OF BOTH HOOVER AND 9TH STREET
ELEVATION = 126.293

BM. SOUTH RIM OF MANHOLE AT STA 0+00, 173 FT. WEST AND 24 FT. SOUTH TO THE CENTER LINE OF BOTH HOOVER AND 8TH ST.
ELEVATION = 126.03

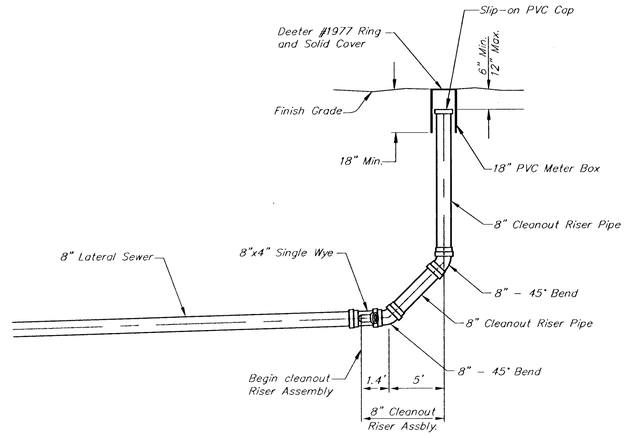

8" CLEANOUT RISER ASSEMBLY

CITY OF WICHITA PUBLIC WORKS ENGINEERING

LAT 270, MAIN 5,
SANITARY SEWER NO. 22

CITY ENGINEER
NEIL D. CABLE, P.E.

PROJECT NUMBER	OCA NUMBER	DATE
472-83666	744004	11/03

CITY ENGINEER'S OFFICE
CITY HALL - SEVENTH FLOOR
455 NORTH MAIN STREET
WICHITA, KANSAS 67202-1620
(316) 268-4501
(316) 268-4114 FAX

DESIGN KALLMAN
DRAWN LOOMIS
SHEET 2 OF 2