


SCALE: 1"=20'
20 10 0 20

NORTHEAST ELEMENTARY
SCHOOL ADDITION

1 ①

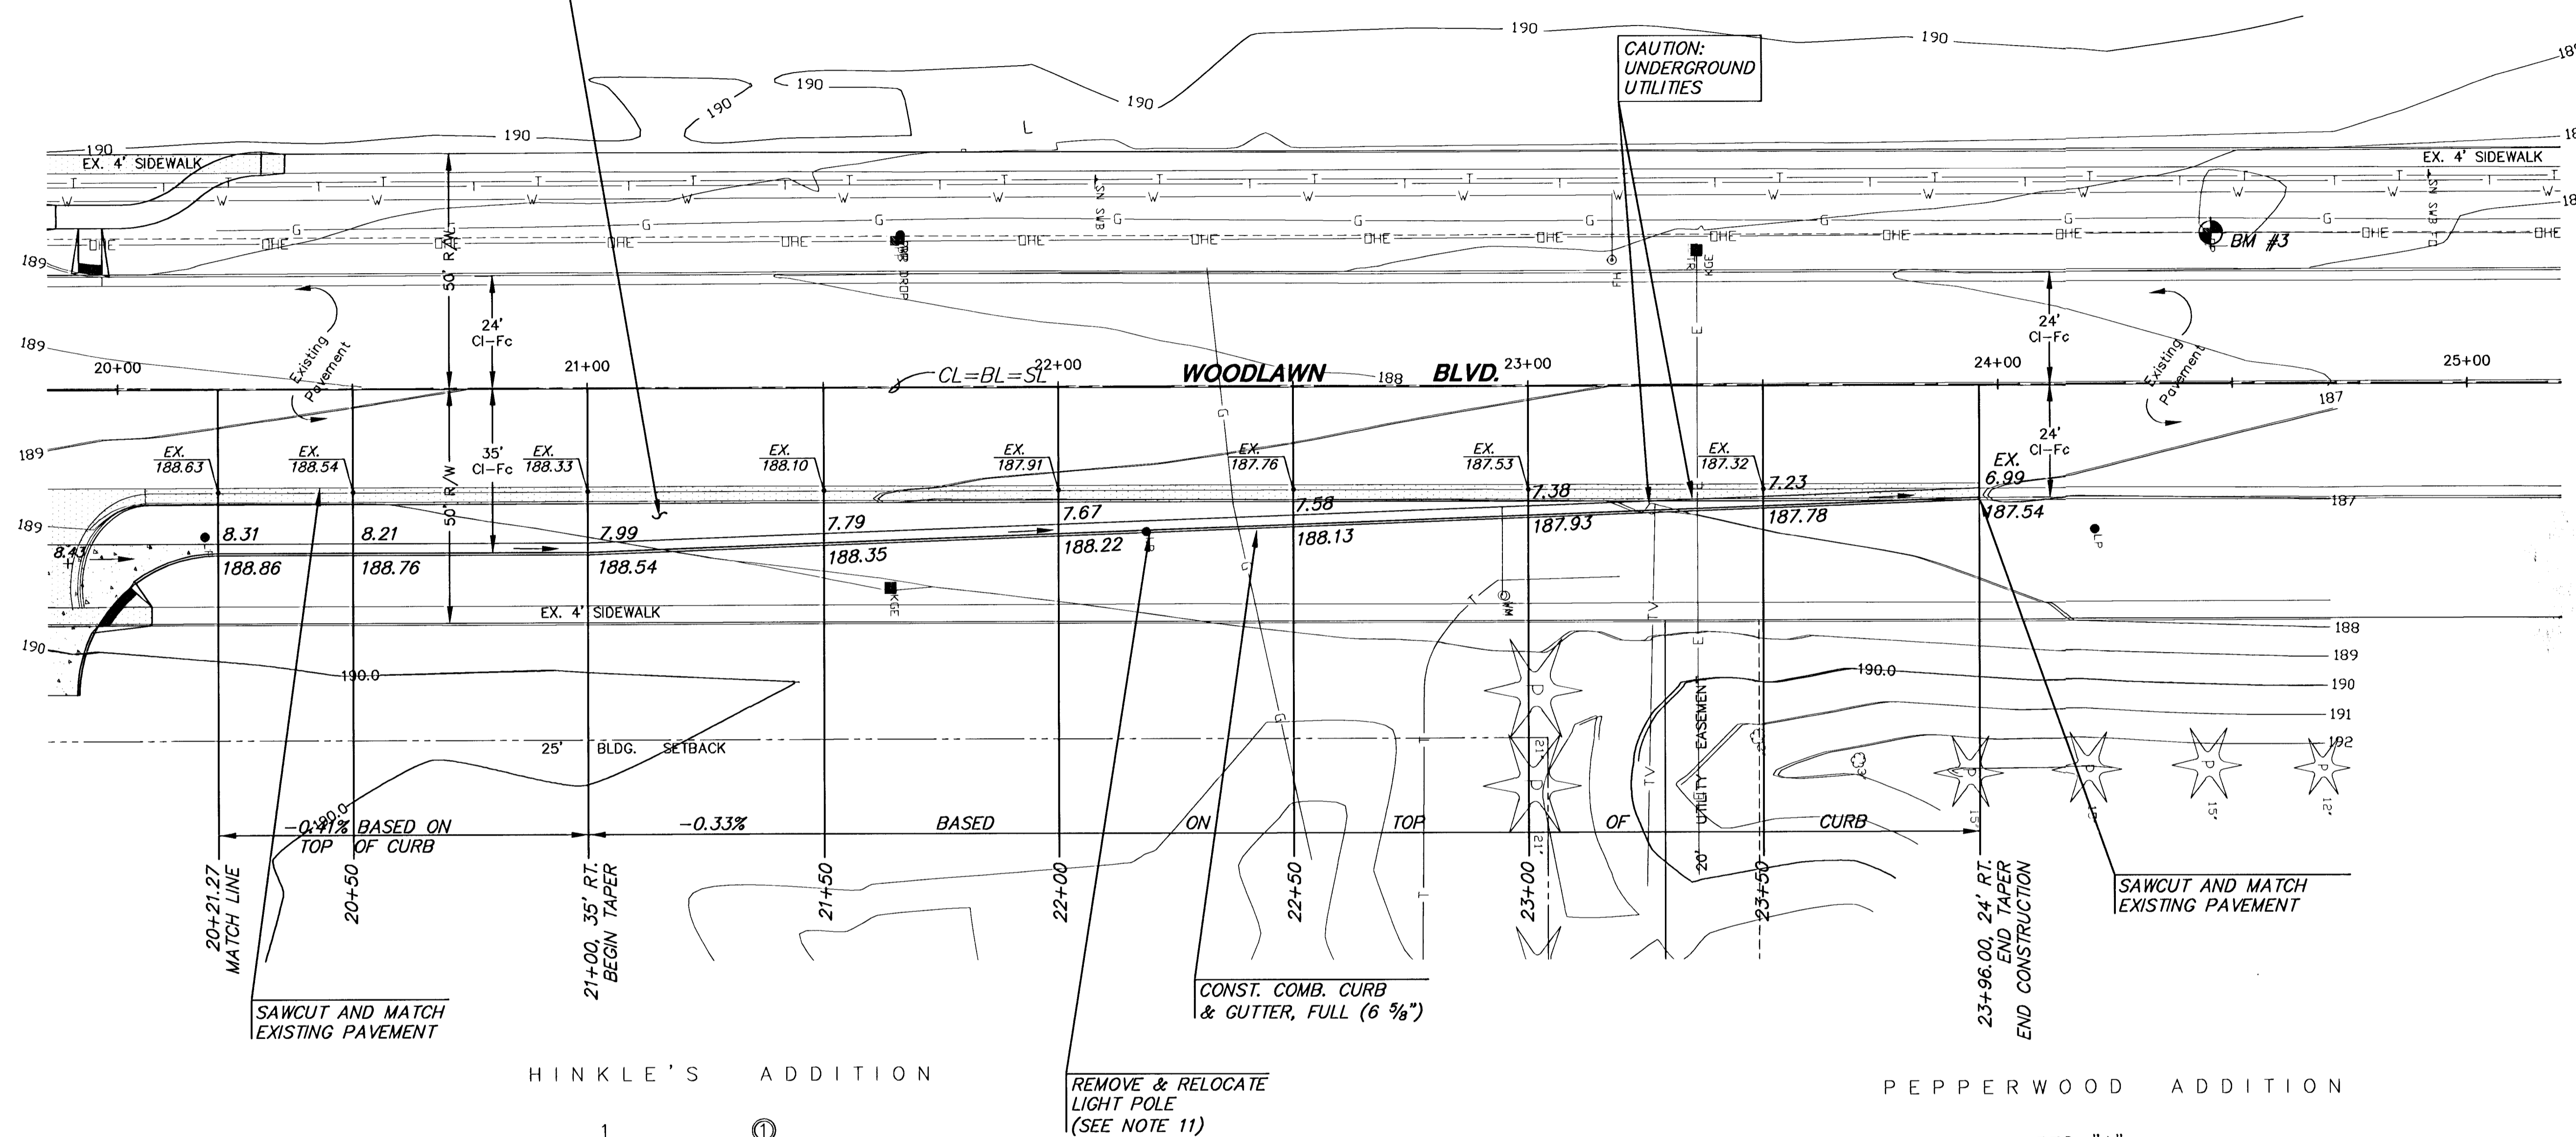

CONST. 7" A.C. PVMT.
OVER 8" REINF. CRUSHED
ROCK BASE.

CAUTION:
UNDERGROUND
UTILITIES

SAWCUT AND MATCH
EXISTING PAVEMENT

CONST. COMB. CURB
& GUTTER, FULL (6 3/8")

SAWCUT AND MATCH
EXISTING PAVEMENT

HINKLE'S ADDITION

1 ①

REMOVE & RELOCATE
LIGHT POLE
(SEE NOTE 11)

PEPPERWOOD ADDITION

RES. "A"

LEGEND

PAVEMENT/SIDEWALK REMOVAL

NOTE:
CONTRACTOR SHALL VERIFY LOCATION
& DEPTH OF EXISTING UTILITIES PRIOR
TO CONSTRUCTION.

MKEC
ENGINEERING
CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67204
316 - 684 - 9400

WOODLAWN BLVD. TURN LANE
PROJECT NAME

STA 20+2127 TO STA 23+96.00
SHEET TITLE

LAC DESIGN BY: DAC DRAWN BY: JTC CHECKED BY:
JUNE 2004 DATE: 04147_E3 JOB NO.: 7 / 30 SHEET/OF