



BENCHMARKS:
 BM #1 - City of Wichita Benchmark
 Disc, SE Corner of Clifton and 55th
 Street South, Southwest corner of
 RCBC, on top of hubguard at the
 West end.
 Elev. = 1263.91 NAVD88

BM #2 - "□" Cut on top of curb,
 north side of Shoffner, adjacent to
 SE corner of Lot 14 Block B,
 Meadowlake Beach Addition,
 Sedgwick County, Kansas.
 Elev. = 1264.80 NAVD88

Baseline = CL Shoffner Cir. & Shoffner

All rubble and debris in public
 right-of-way, easements and lots in
 project benefit district shall be removed
 by contractor. To be paid for as lump
 sum bid item "Site Clearing"

All trees in public right-of-way,
 easements and lots in project benefit
 district shall be removed by contractor.
 To be paid for as lump sum bid item
 "Site Clearing"

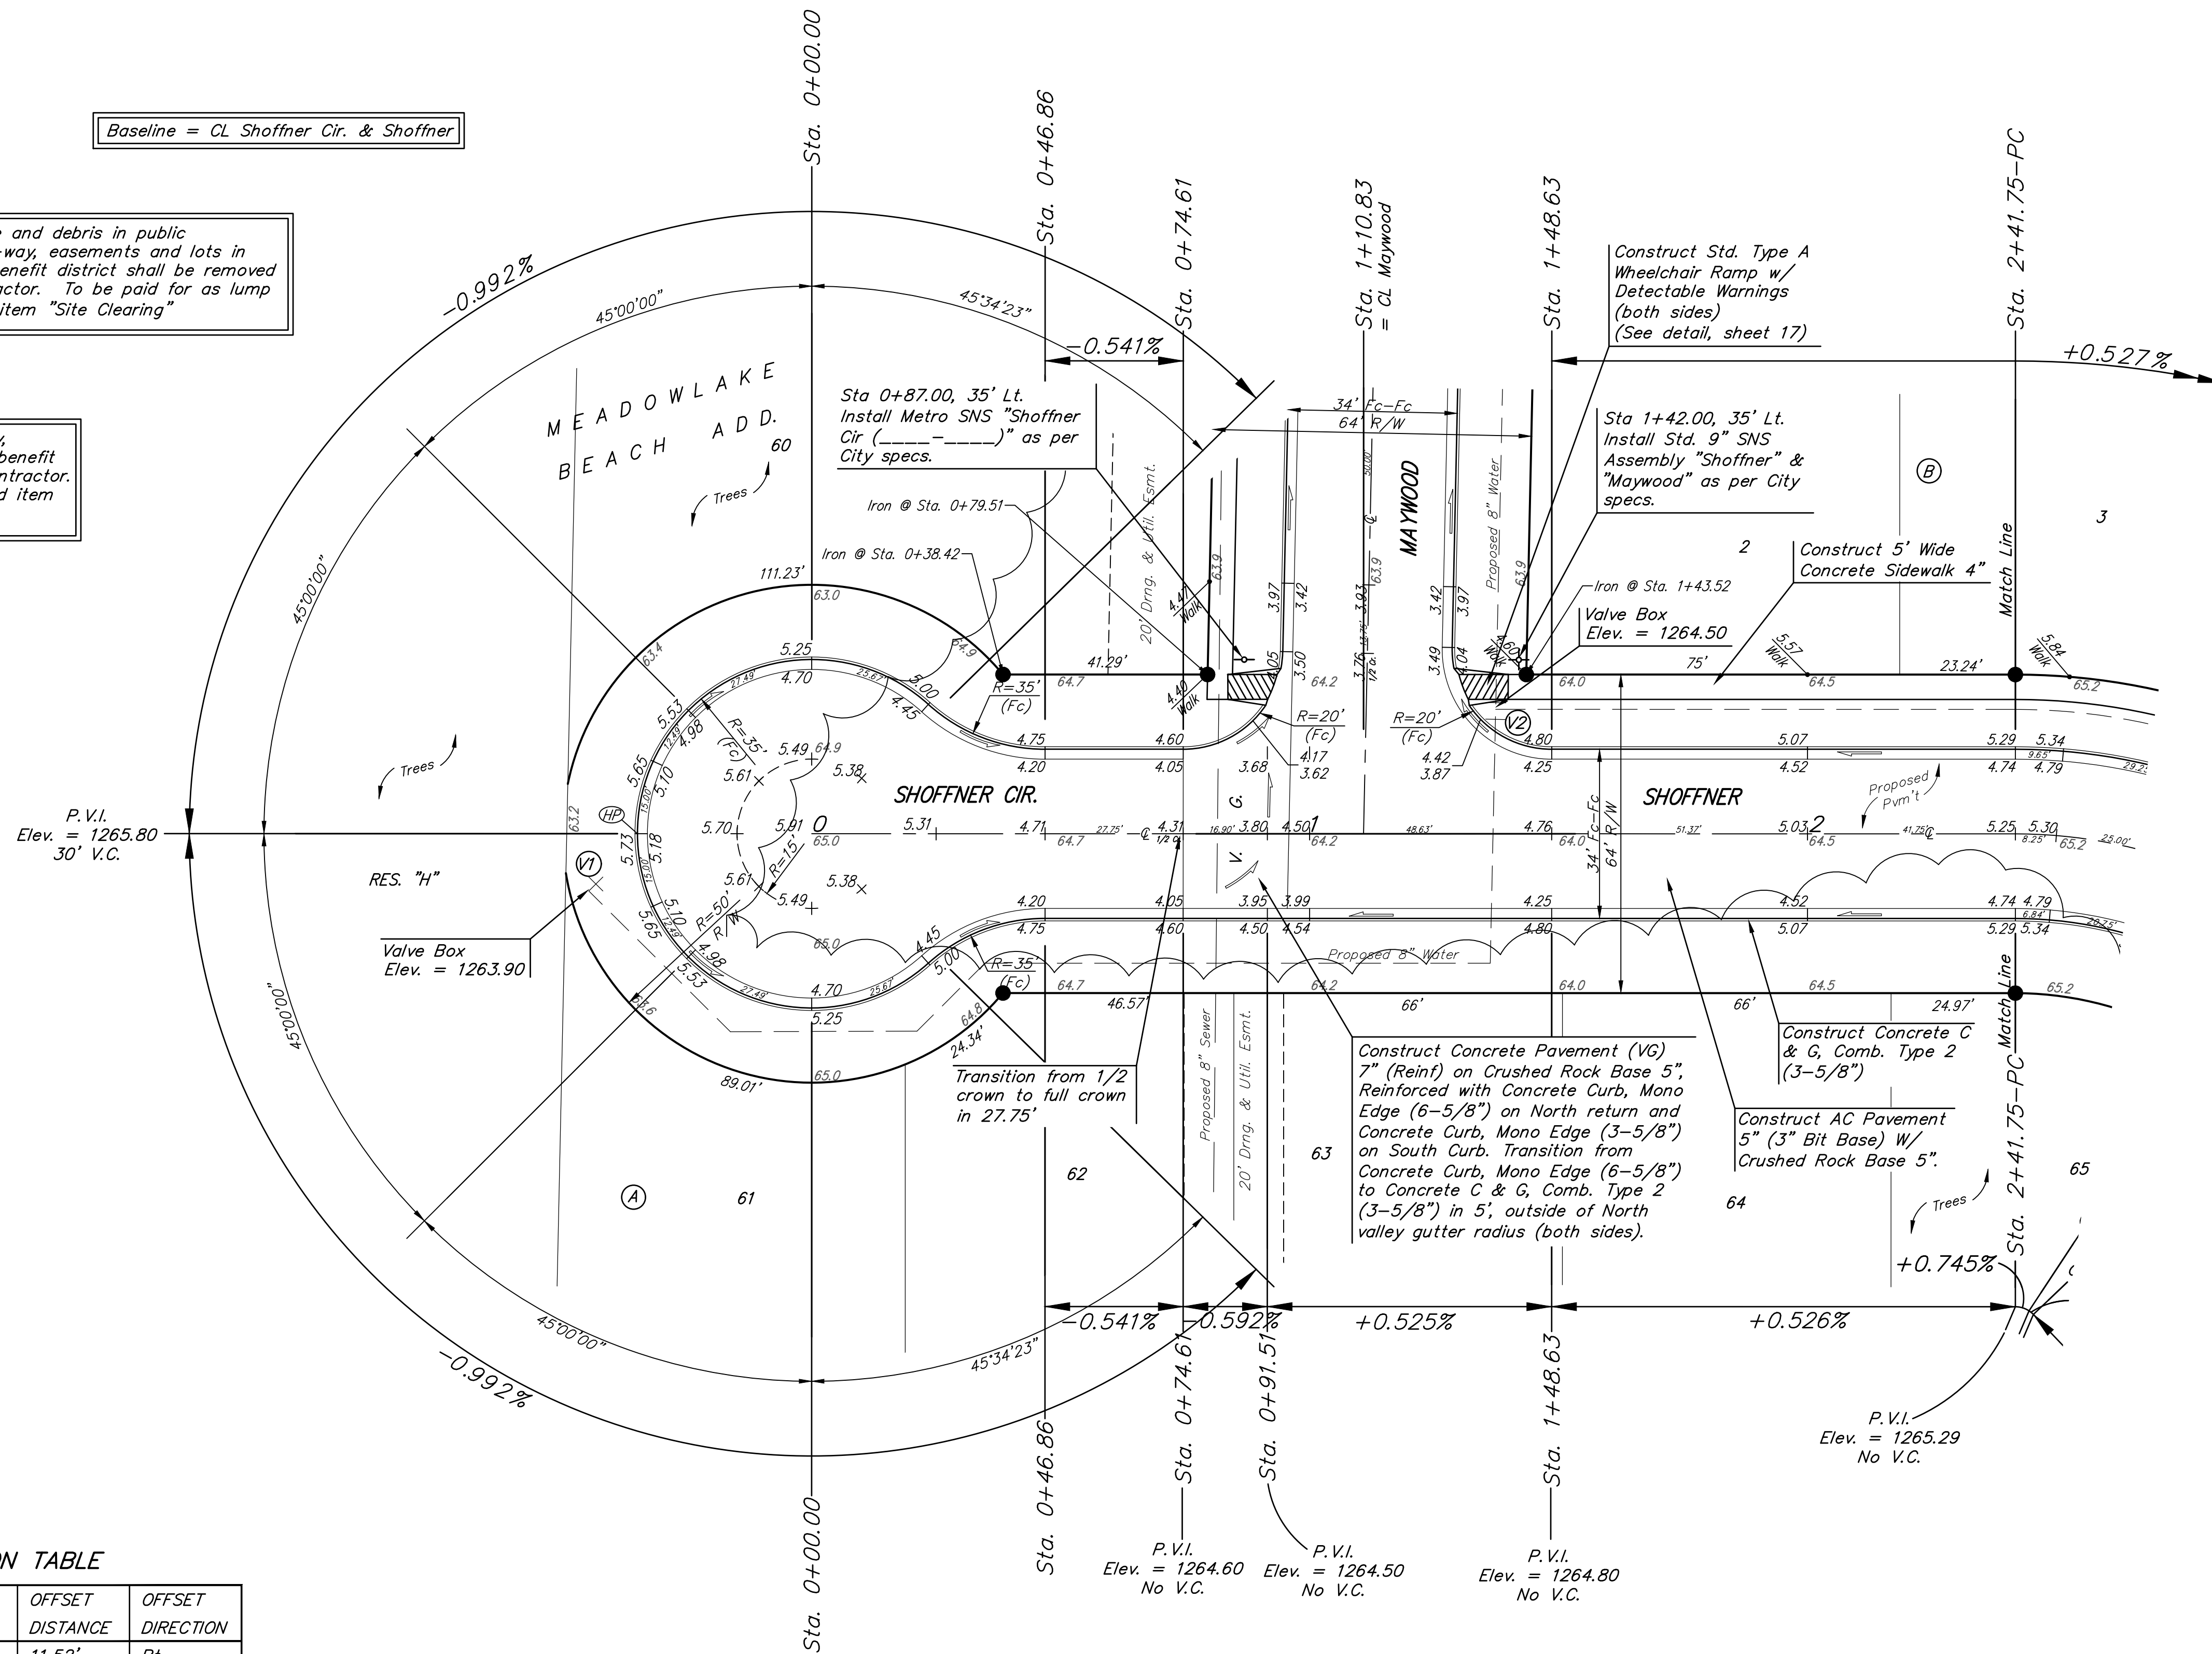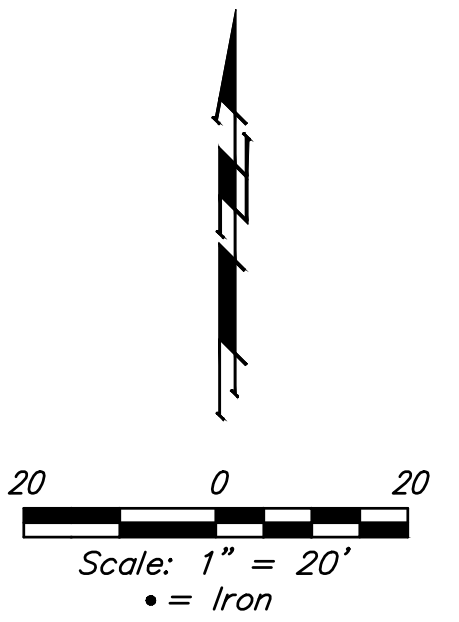

WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V1	Shoffner Cir.	0-44.76	11.52'	Rt.
V2	Shoffner	1+37.37	25'	Lt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves (except blowoffs) are left in the "ON" position when the project is completed.

NOTE: ROLL TYPE CURB & GUTTER (TYPE 2) TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB (TYPE 4).

MEADOWLAKE BEACH ADD. - PH. 3A
SHOFFNER CIR. & SHOFFNER
 STREET IMPROVEMENTS

Baughman Company, P.A.
 ENGINEERING ARCHITECTURE
 1515 W. 16th St., Suite 100
 Wichita, KS 67203
 Phone: 316.261.1111
 Fax: 316.261.1112
 www.baughman.com
 Date: 08/20/2010
 Drawn: TMS
 Checked: TMS
 Approved: TMS