BENCHMARKS:
BM #1 – City of Wichita Benchmark Disc, SE Corner of Clifton and 55th Street South, Southwest corner of RCBC, on top of hubguard at the West end.
Elev. = 1263.91 NAVD88

BM #2 – "□" Cut on top of curb, north side of Shoffner, adjacent to SE corner of Lot 14 Block B, Meadowlake Beach Addition, Sedgwick County, Kansas.
Elev. = 1264.80 NAVD88

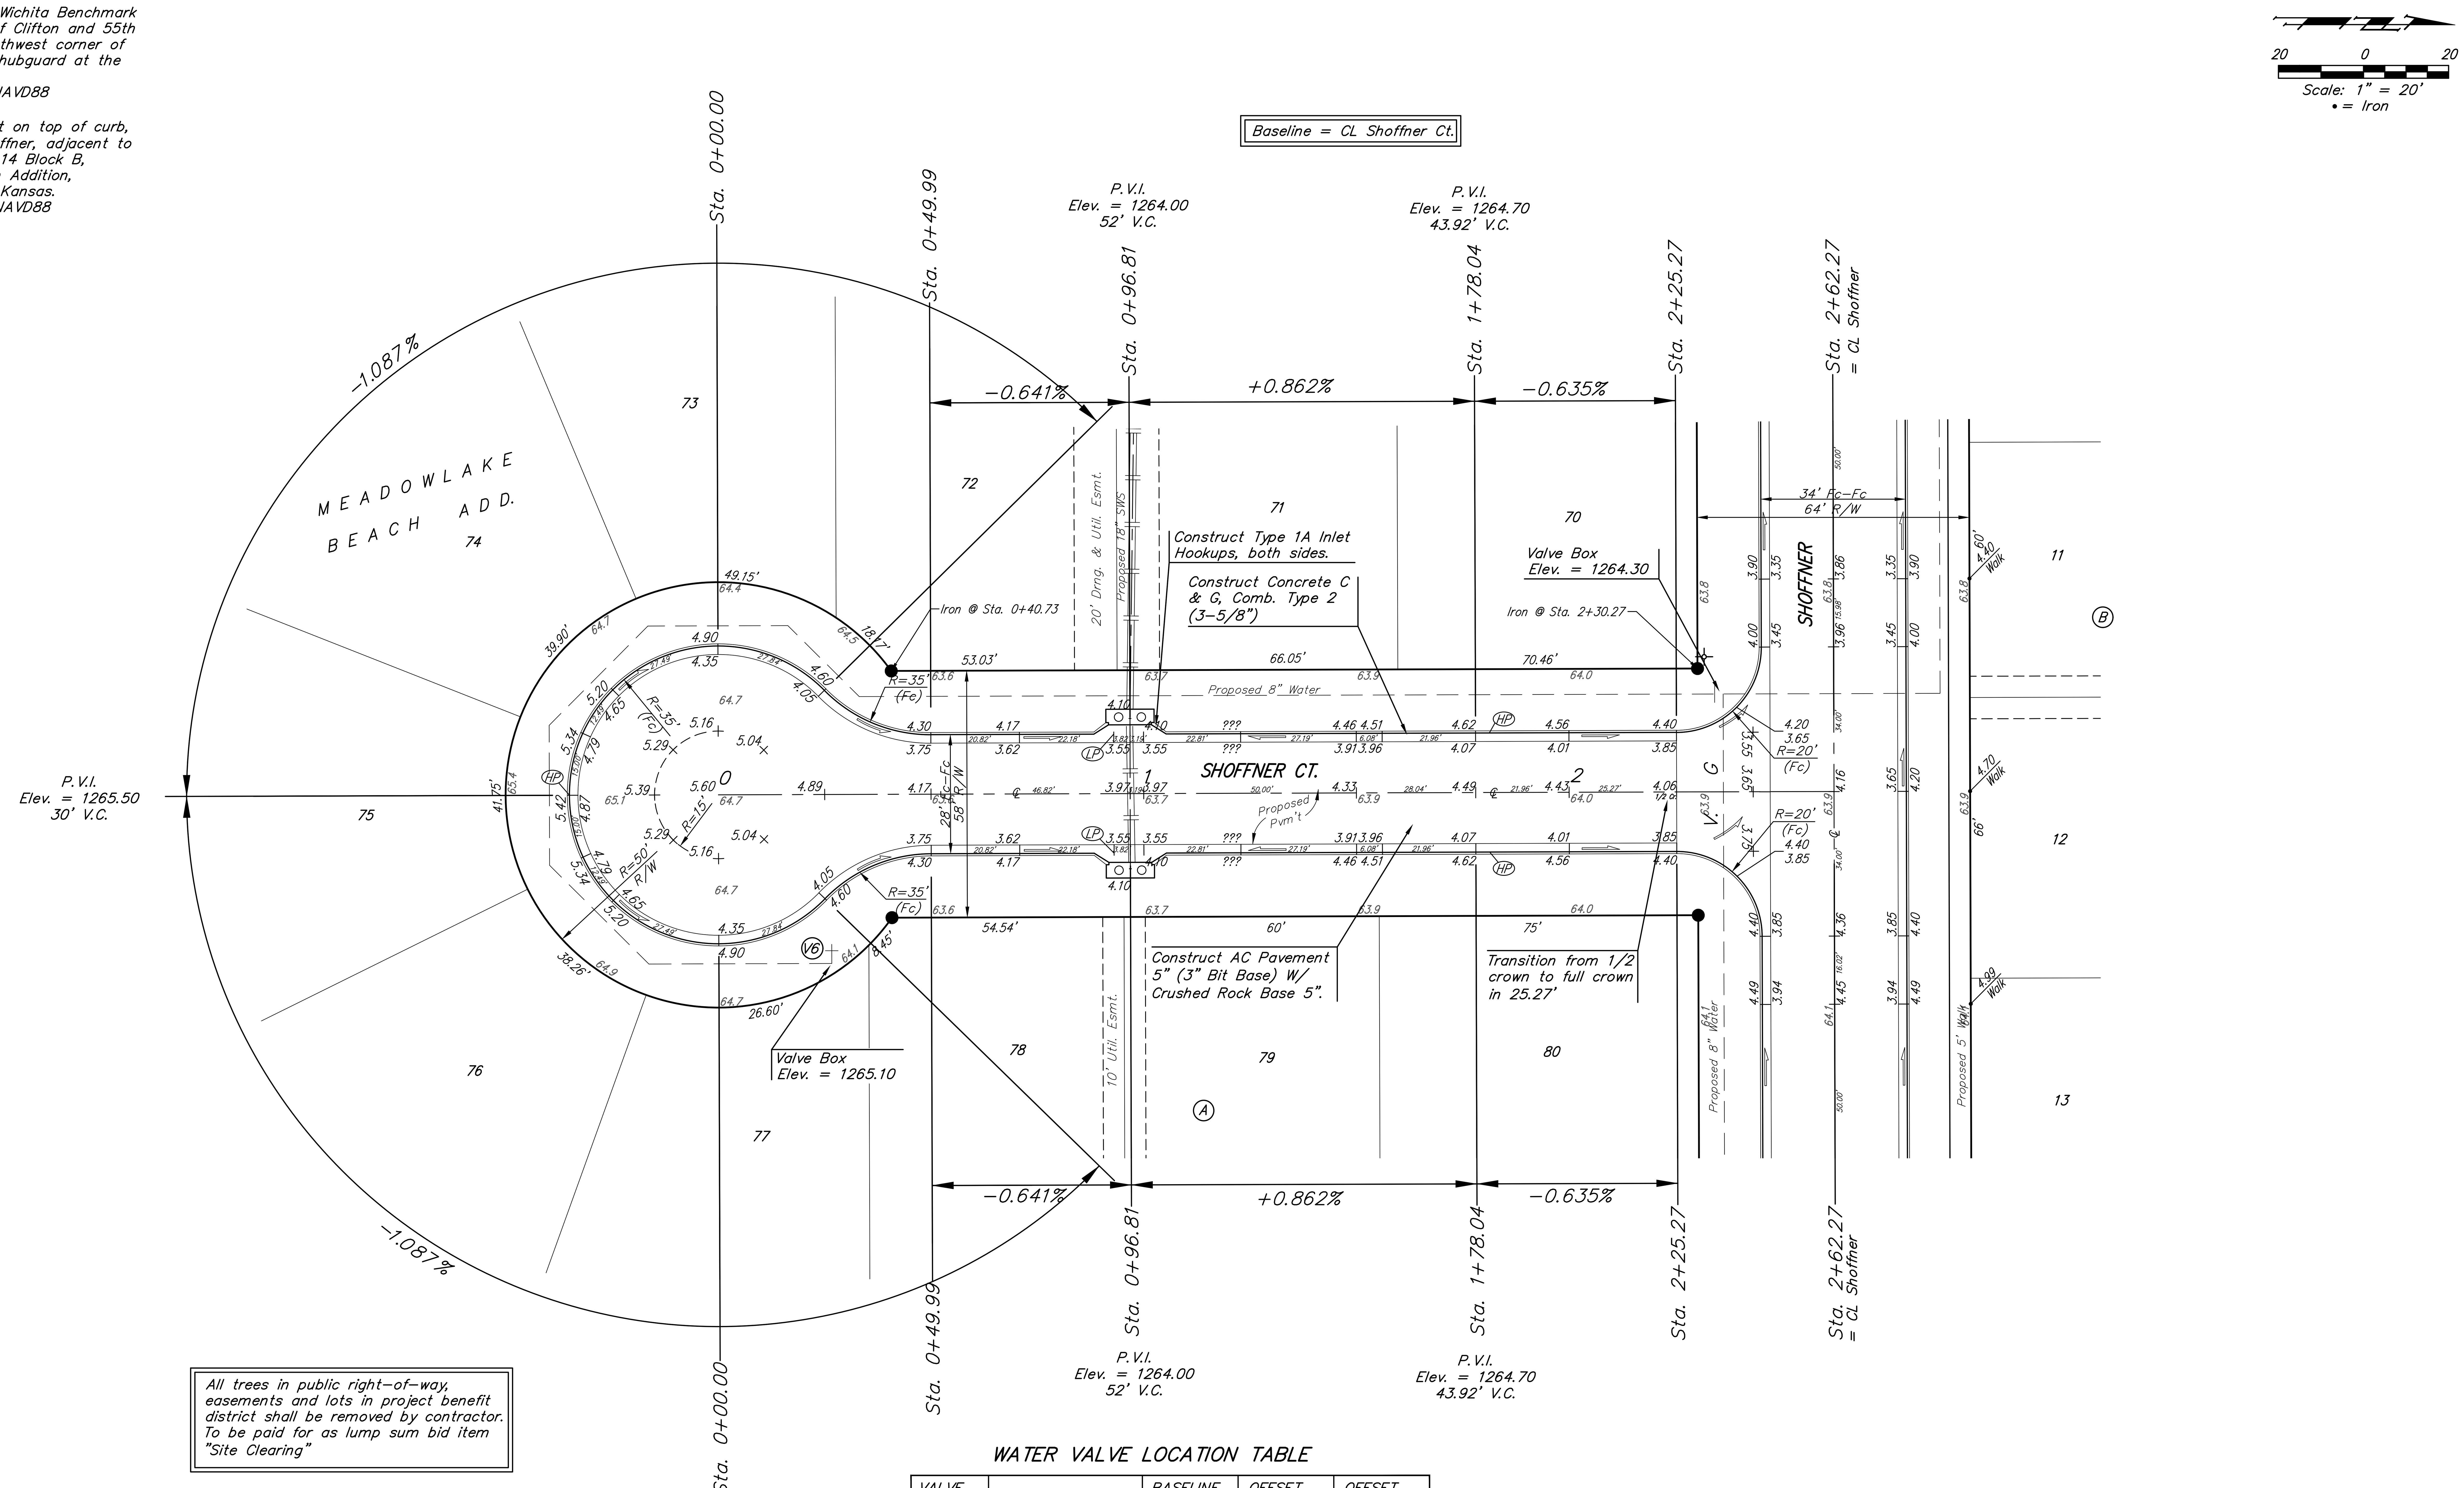

All trees in public right-of-way, easements and lots in project benefit district shall be removed by contractor. To be paid for as lump sum bid item "Site Clearing"

All rubble and debris in public right-of-way, easements and lots in project benefit district shall be removed by contractor. To be paid for as lump sum bid item "Site Clearing"

WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V6	Shoffner Ct.	0+26.54	39.73'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves (except blowoffs) are left in the "ON" position when the project is completed.

NOTE: ROLL TYPE CURB & GUTTER (TYPE 2) TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB (TYPE 4).

Baughman Company, P.A.

MEADOWLAKE BEACH ADD. - PH. 3A
SHOFFNER CT.
STREET IMPROVEMENTS

SHEET 5 OF 37