


11+00

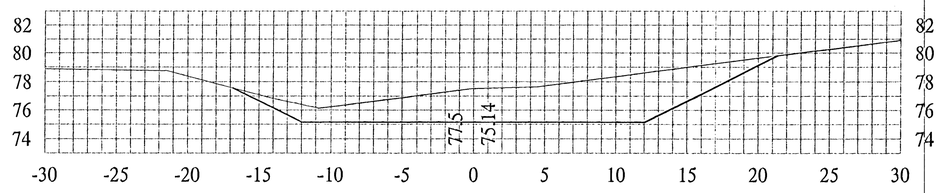


10+50

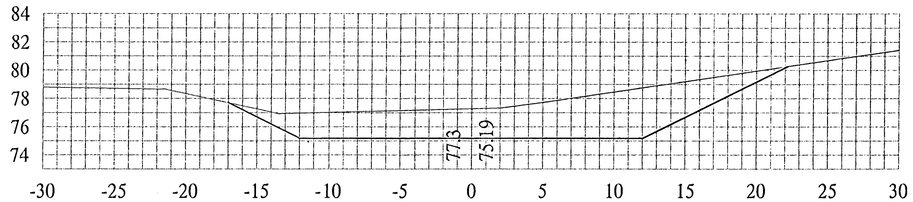

10+00

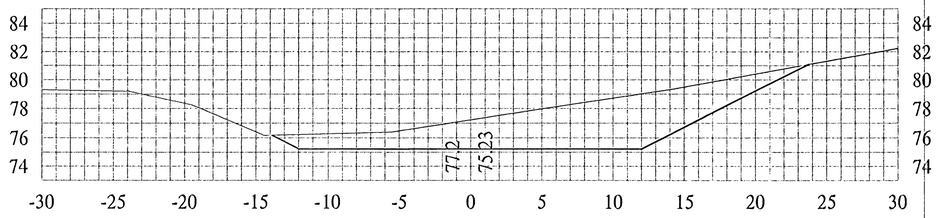


9+50

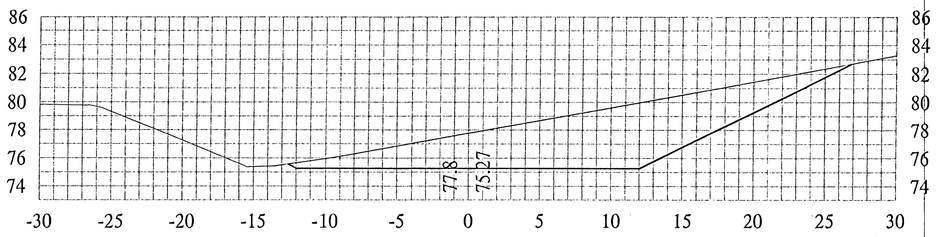

STATION	AREAS Square Feet		VOLUMES Cubic Yards		CUMULATIVE VOLUMES Cubic Yards	
	CUT	FILL	CUT	FILL	CUT	FILL
0+00	112.71	0.00				
0+50	111.57	0.00	207.67	0.00	207.67	0.00
1+00	133.62	0.00	227.03	0.00	434.70	0.00
1+28.67	111.71	0.00	130.25	0.00	564.95	0.00
1+50	112.35	0.00	88.50	0.00	653.45	0.00
2+00	118.99	0.00	214.20	0.00	867.66	0.00
2+50	107.62	0.00	209.83	0.00	1077.48	0.00
3+00	69.66	0.00	164.15	0.00	1241.64	0.00
3+50	74.14	0.00	133.15	0.00	1374.78	0.00
4+00	75.37	0.00	138.44	0.00	1513.22	0.00
4+50	71.80	0.00	136.27	0.00	1649.50	0.00
5+00	71.11	0.00	132.33	0.00	1781.82	0.00
5+50	76.46	0.00	136.64	0.00	1918.47	0.00
6+00	82.96	0.00	147.62	0.00	2066.08	0.00
6+50	85.64	0.00	156.12	0.00	2222.20	0.00
7+00	91.95	0.00	164.43	0.00	2386.63	0.00
7+50	99.49	0.00	177.25	0.00	2563.88	0.00
8+00	100.36	0.00	185.04	0.00	2748.92	0.00
8+50	97.38	0.00	183.09	0.00	2932.01	0.00
9+00	105.98	0.00	188.30	0.00	3120.31	0.00
9+50	94.61	0.00	185.73	0.00	3306.04	0.00
10+00	73.01	0.00	155.20	0.00	3461.24	0.00
10+50	77.59	0.00	139.44	0.00	3600.69	0.00
11+00	71.99	0.00	138.50	0.00	3739.18	0.00
11+29.87	51.75	0.00	68.45	0.00	3807.63	0.00
			0.00	0.00	3807.63	0.00

For Information Only

11+29.87

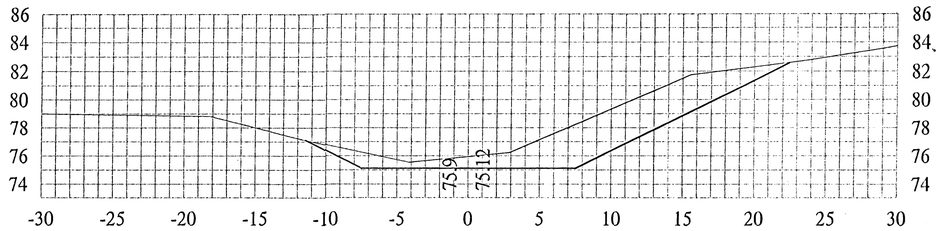

PROJECT NUMBER	SHEET NAME	ENGINEERING DIRECTORY
472-76-245-83324	XSEC	F:\Hydraulic\KTA

DESIGN	DRAWN	APPROVED	DATE	SCALE	BAUGHMAN NO
TPV	TPV	JEB	FEB 2001	1:5	99-09-E453

CAPITAL IMPROVEMENT PROJECT
24' DRAINAGE CHANNEL
CROSS SECTIONS
HYDRAULIC AVENUE PAVING - INCIDENTAL DRAINAGE IMPROVEMENTS - PHASE 1

BAUGHMAN COMPANY, P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET 36 OF 36

ET-10-60-AT