


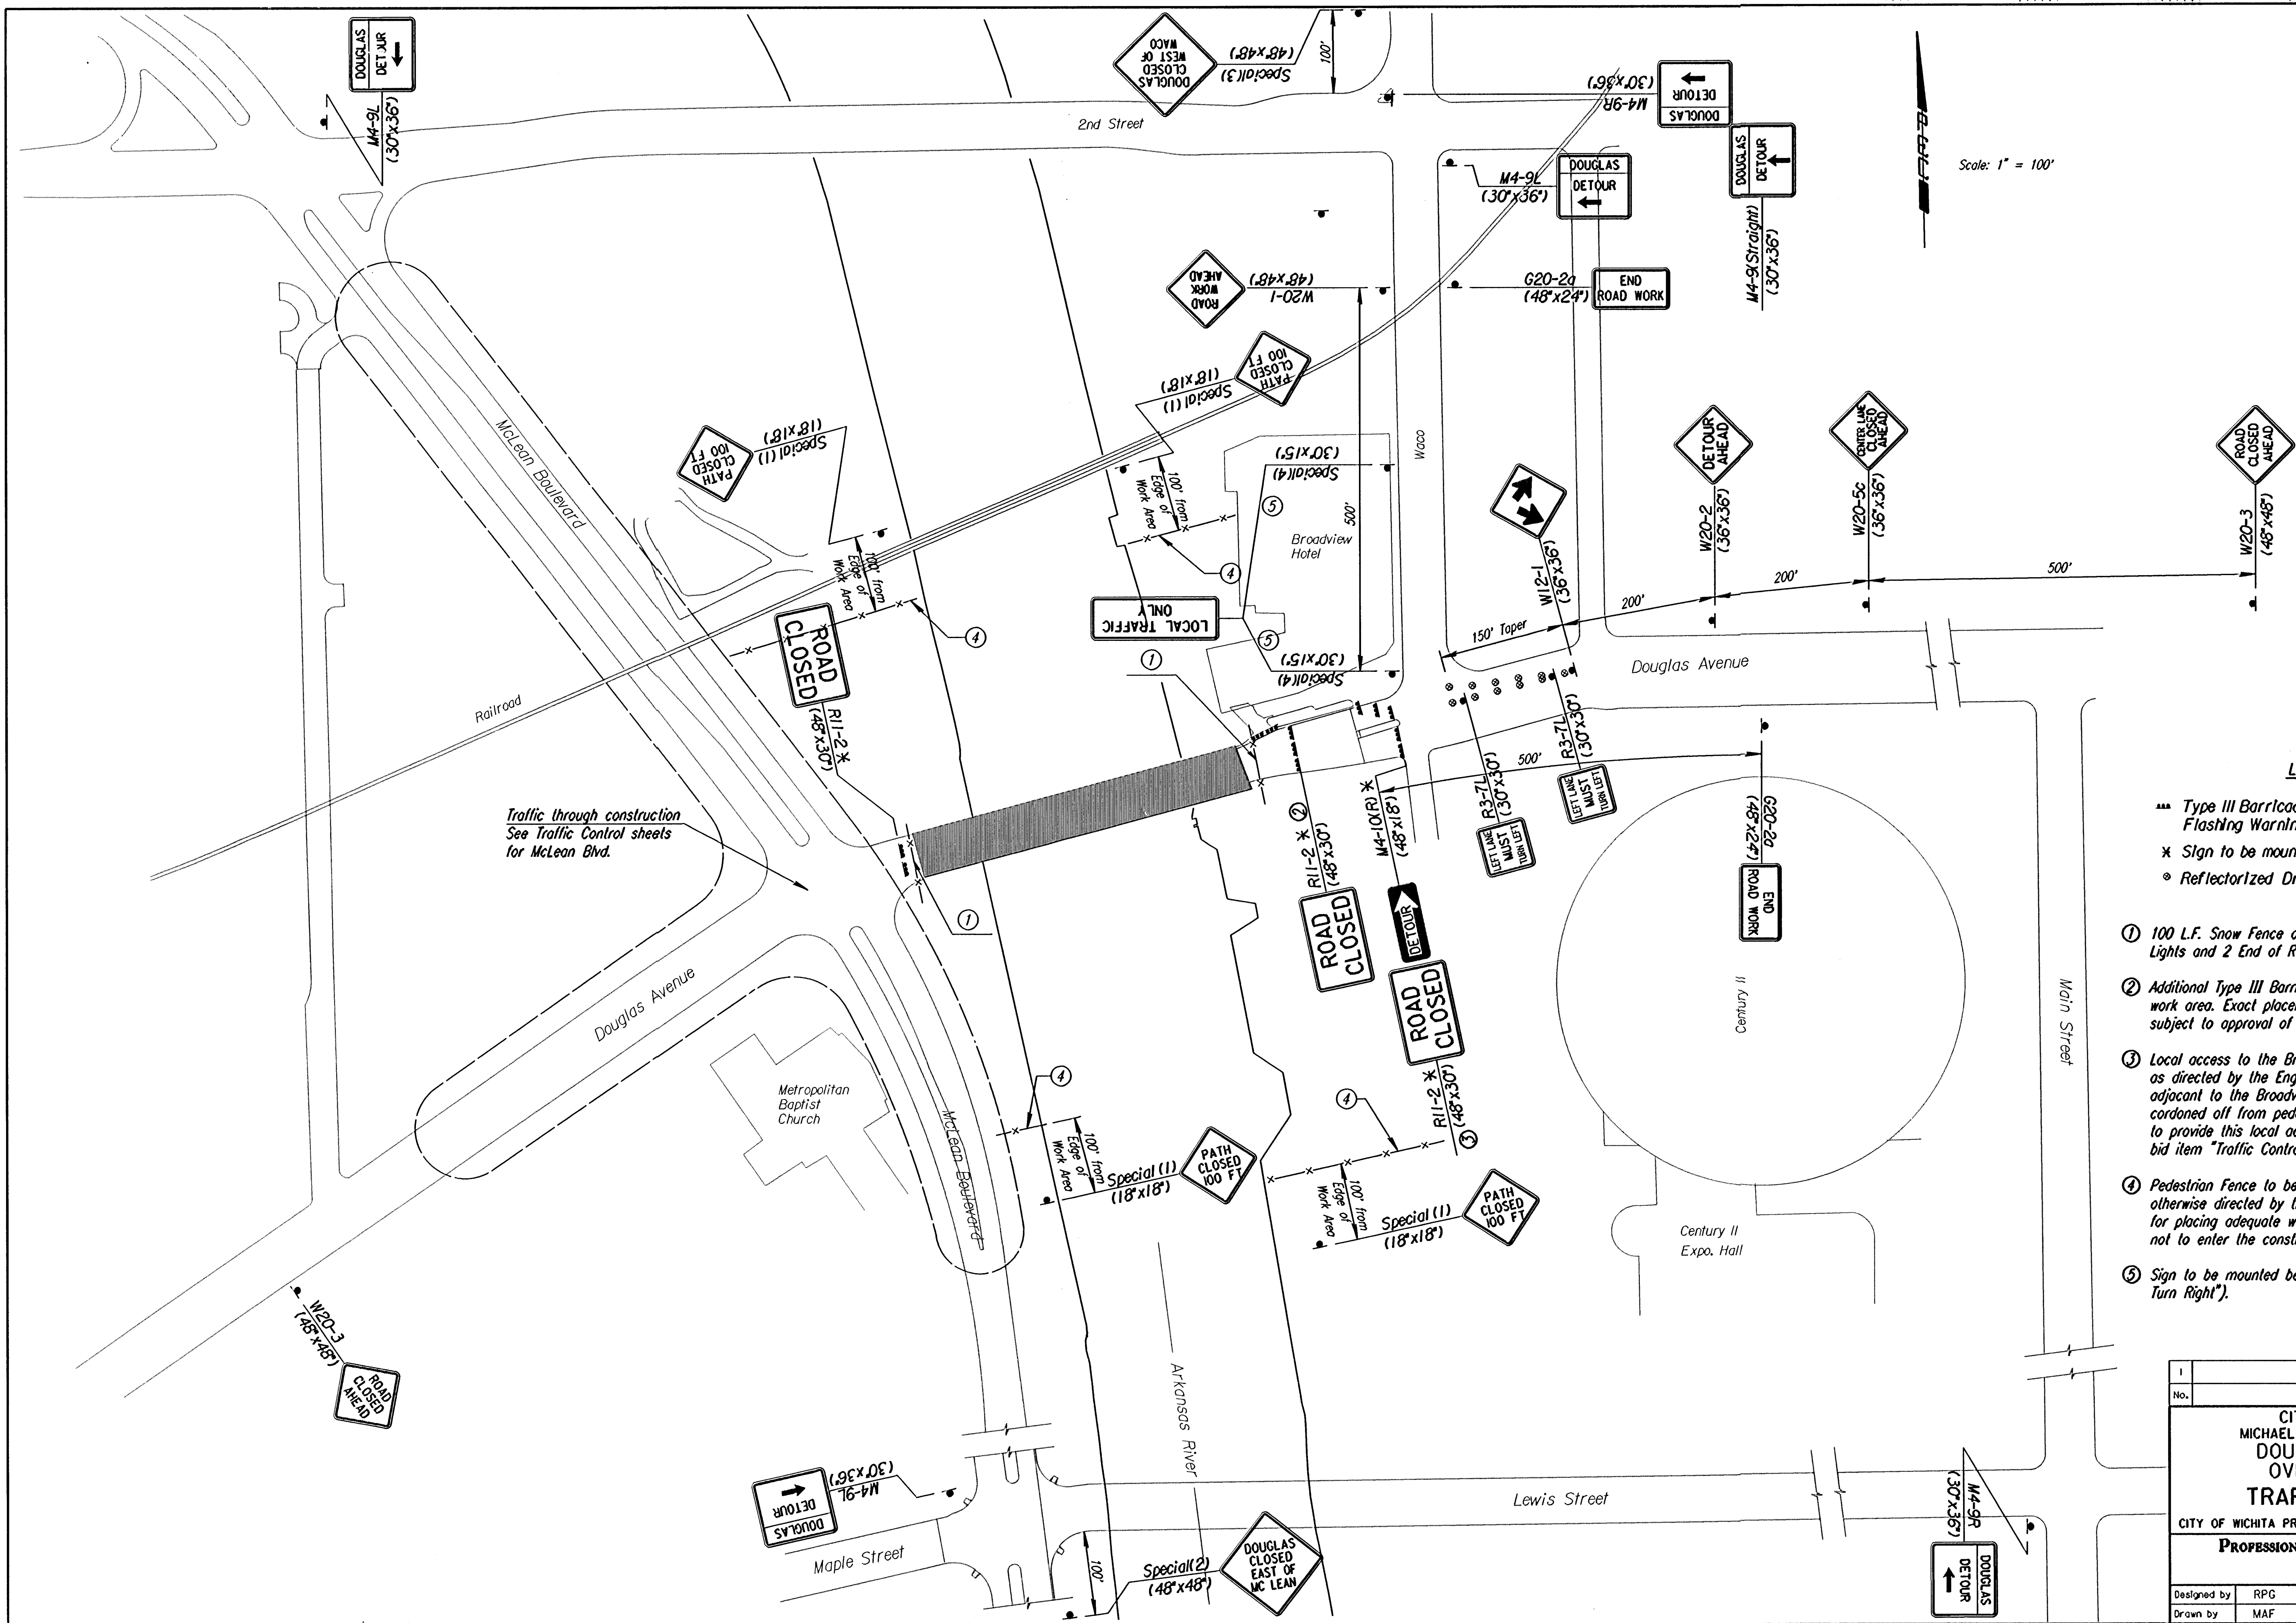

- LEGEND**
- *** Type III Barricade with Type A Low Intensity Flashing Warning Lights.
 - * Sign to be mounted on Type III Barricade
 - o Reflectorized Drums @ 30' Spacing
- 100 L.F. Snow Fence on T-Posts with 3 Type A Warning Lights and 2 End of Road Markers.
 - Additional Type III Barricades to be placed adjacent to work area. Exact placement of barricades shall be subject to approval of the Engineer.
 - Local access to the Broadview Hotel may be required as directed by the Engineer. However, work areas adjacent to the Broadview Hotel must still be cordoned off from pedestrians. Any extra work required to provide this local access shall be subsidiary to the bid item "Traffic Control (Lump sum)".
 - Pedestrian Fence to be placed at edge of work area or as otherwise directed by the Engineer. Contractor is responsible for placing adequate warning and/or deterrents for pedestrians not to enter the construction area.
 - Sign to be mounted below existing sign R3-7R ("Right Lane Must Turn Right").

Revisions		By	Date
No.			
CITY OF WICHITA, KANSAS MICHAEL E. LINDEBAK, P.E.-CITY ENGINEER DOUGLAS AVENUE BRIDGE OVER ARKANSAS RIVER TRAFFIC CONTROL PLAN CITY OF WICHITA PROJECT NO. 472-82721 PROFESSIONAL ENGINEERING CONSULTANTS, P.A. ENGINEERS WICHITA, KANSAS			
Designed by	RPG	Checked by	RPG
Drawn by	MAF	Date	Sept. 1997
		Job No.	95088-4