LEFT TURN LANE
AT FIRST STREET AND GROVE

PROJ. NO. 472-84095
OCA NO. 706912

CITY OF WICHITA, KANSAS
JAMES L. ARMOUR P.E. - ACTING CITY ENGINEER

GENERAL NOTES:

1. Contractor will be required to provide a minimum advance notice of forty-eight (48) hours to utility companies prior to starting any excavation as follows:

Kansas One Call	687-2470

The Contractor must notify the following in case of an emergency:

Southwestern Bell Telephone	268-2245
Cox Communications	262-4270 or 263-2061
Kansas Gas Service	832-3168
Westar Energy	261-6512
Aquila	941-1642
City of Wichita Water and Sewer Dept.	268-4555

2. Utility service lines, poles, valve boxes, meters, etc. are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.

3. A saw cut of at least one-half the depth of existing surface courses or one-fourth the depth of the existing total pavement thickness shall be provided where proposed pavement abuts an existing surface course or pavement removal. Sawed joint to facilitate removal within three (3) feet of existing joints will not be permitted and for such instances the limits of removal shall extend to the existing joint. Such saw cuts will not be paid for directly and this cost shall be considered as subsidiary to other bid items.

4. Rubble Removal - Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance, and site location. Locations that, in the opinion of the Engineer, will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain will require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to US Corps of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location. The cost of disposing of rubble from the removal of miscellaneous structures and excess excavation, including loading and hauling shall be subsidiary to the other bid items.

5. The Contractor shall satisfy himself of surface and subsurface conditions prior to bidding.

6. Temporary surfacing material (rock, asphalts, etc.) may have been placed within street rights-of-way for haul roads and temporary access prior to construction. The Contractor shall field verify existing conditions to determine extend, if any, of such surfacing. Contractor shall remove said temporary surfacing in the same manner as noted above for rubble. This removal shall be subsidiary to "Site Clearing".

7. The Contractor shall notify pipeline companies at least 24 hours in advance of any work being performed across and/or adjacent to pipelines..

8. The Contractor shall give all property owners and/or tenants of developed property abutting the project limits a minimum of ten (10) days advance notice prior to start of construction.

9. The Contractor shall obtain "storm water pollution prevention plan" (SWPPP) requirements from the representative of the owner/developer prior to beginning construction and comply with said SWPPP.


10. The Contractor must examine the construction site prior to bidding and be satisfied as to the work shown for completion. After bids have been received, the Contractor shall not assert that there was a misunderstanding of the quantities of work or of the nature of the work to be completed.


11. All construction and materials, unless otherwise noted, to comply with City of Wichita specifications and standards.

INDEX OF SHEETS

SHEET 1 - TITLE SHEET
SHEET 2 - TYPICAL SINGLE LEFT TURN DETAIL
SHEET 3 - TYPICAL CONCRETE DETAIL
SHEET 4 - PAVING PLAN
SHEET 5 - QUARTER SECTIONS

LOCATION MAP

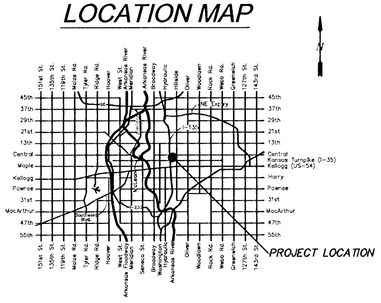

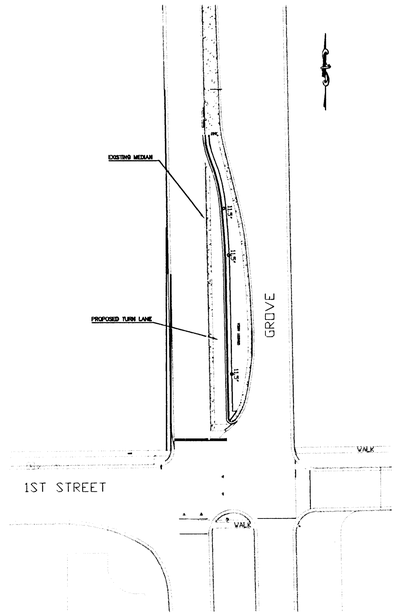



Scale: 1"=100'

JULIANNE L. KALL
LICENSED
9-29-04
KANSAS
PROFESSIONAL ENGINEER

THE CITY OF WICHITA	LEFT TURN LANE AT FIRST ST. AND GROVE
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202 (316) 268-4501 (316) 268-4114 FAX	JAMES ARMOUR P.E. - CITY ENGINEER
	PROJECT NUMBER 472-84095 / OCA 706912
	DATE AUG 04' / SHEET 1 OF 5