

BENCHMARKS:

BM #1: "□" on top of curb near the NW corner of Lot 28, Block E, Firefly Way Addition.
Elev. = 1399.50 NAVD88

BM #2: "□" on top of curb near the NE corner of Lot 34, Block D, Firefly Way Addition.
Elev. = 1400.76 NAVD88

BM #3: "□" on top of curb near the NW corner of Lot 27, Block E, Firefly Way Addition.
Elev. = 1398.85 NAVD88

Subdivision Bench Marks

Street & Station	Location Description	Elevation
Woodspring Ct. 2+23.42, 14.25' Lt.	Adjacent to Fire Hydrant near common front lot corner of Lots 29 and 30, Block D, Firefly Way Addition.	



WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V6	Woodspring Ct.	0+26.54	39.73'	Rt.
V7	Woodspring Ct.	2+23.42	23'	Lt.
V8	Woodspring Ct.	3+59.92	23'	Lt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves (except blowoffs) are left in the "ON" position when the project is completed.

P.V.I.
Elev. = 1398.94
No V.C.

P.V.I.
Elev. = 1398.07
No V.C.

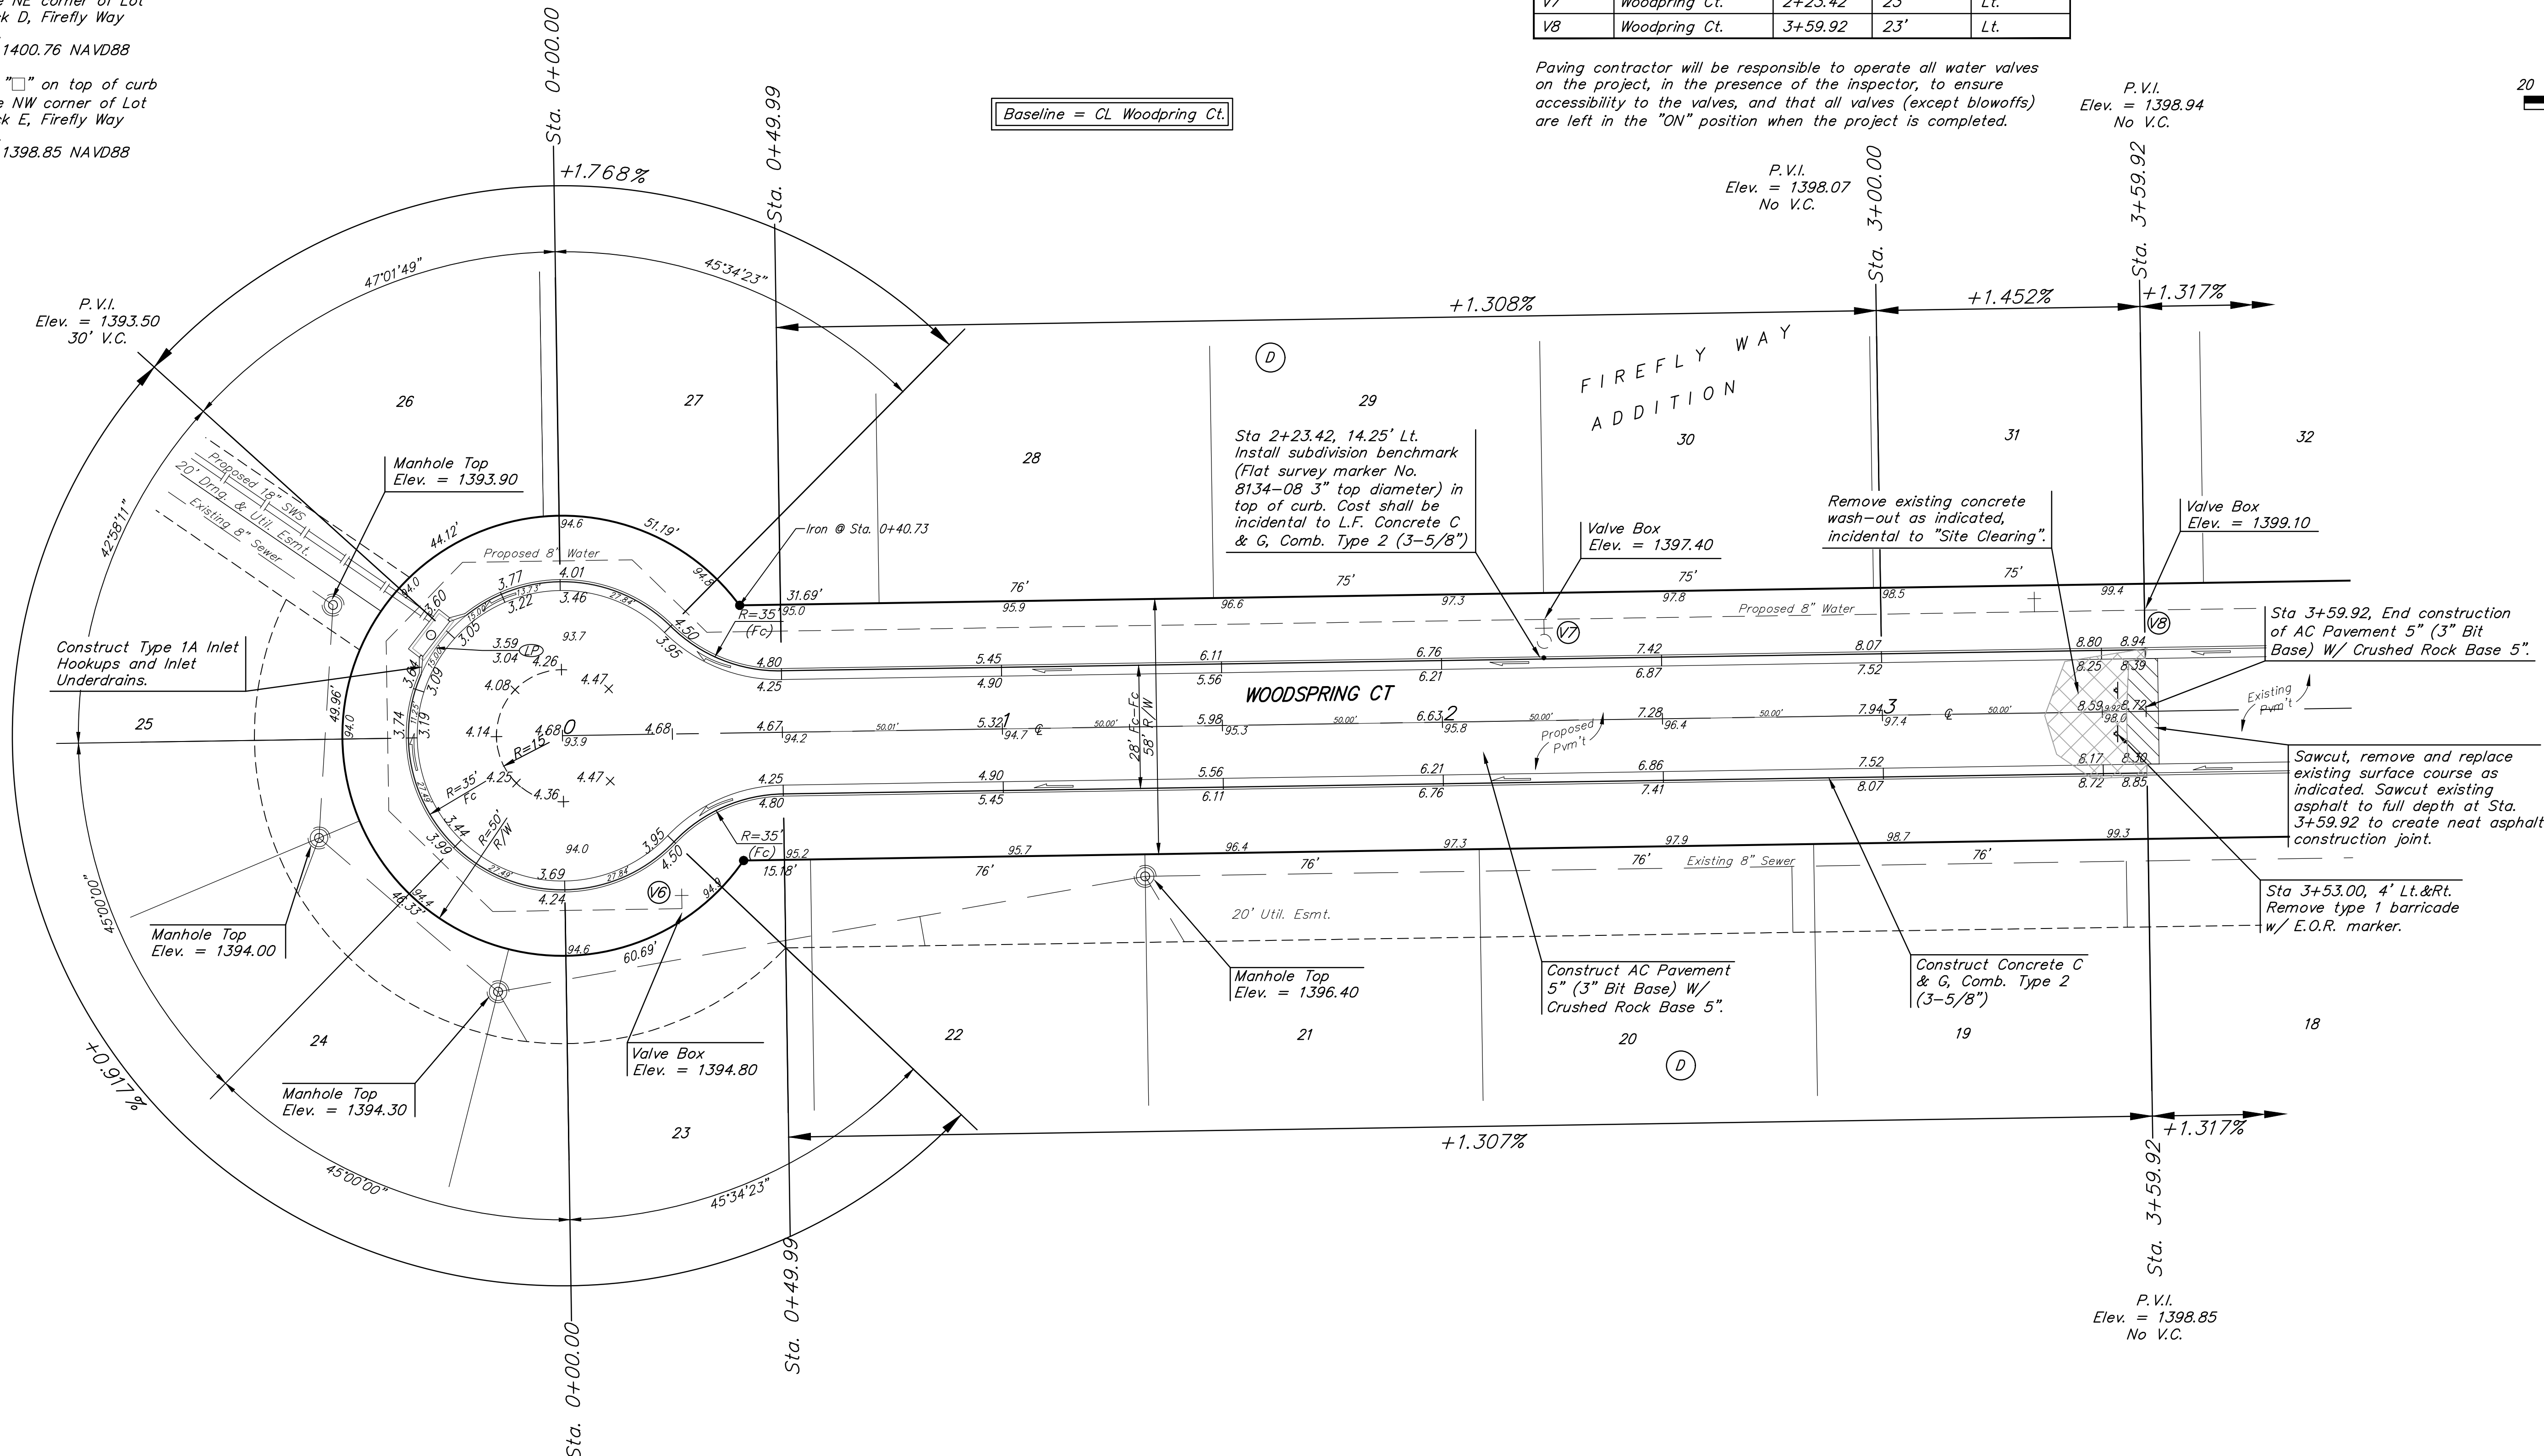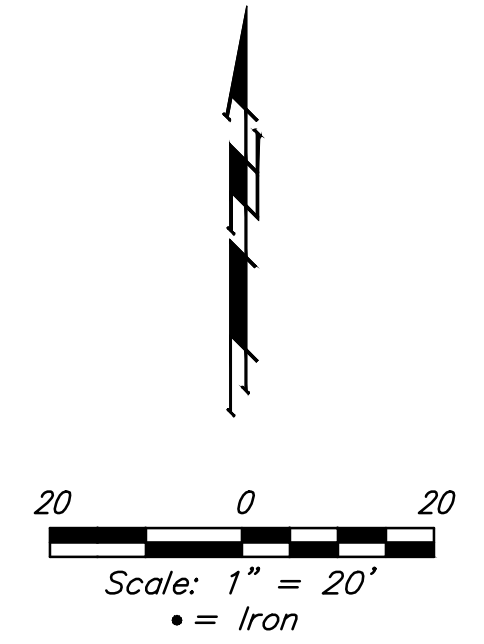

Baseline = CL Woodspring Ct.

Sta 2+23.42, 14.25' Lt.
Install subdivision benchmark (Flat survey marker No. 8134-08 3" top diameter) in top of curb. Cost shall be incidental to L.F. Concrete C & G, Comb. Type 2 (3-5/8")



Remove existing concrete wash-out as indicated, incidental to "Site Clearing".

Sta 3+59.92, End construction of AC Pavement 5" (3" Bit Base) W/ Crushed Rock Base 5".

Sawcut, remove and replace existing surface course as indicated. Sawcut existing asphalt to full depth at Sta. 3+59.92 to create neat asphalt construction joint.

Sta 3+53.00, 4' Lt.&Rt. Remove type 1 barricade w/ E.O.R. marker.

NOTE: ROLL TYPE CURB & GUTTER (TYPE 2) TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB (TYPE 4).

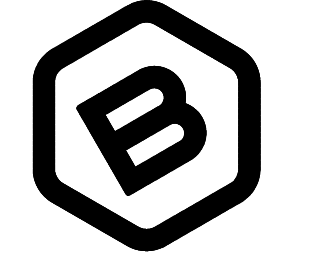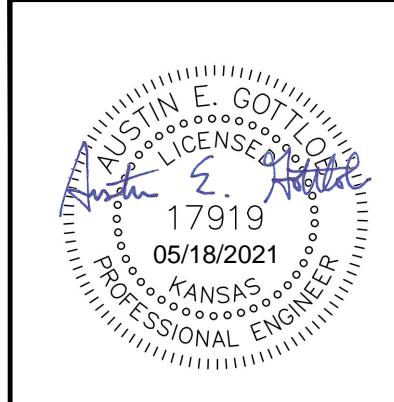

BAUGHMAN COMPANY

315 Ellis St.
Wichita, KS 67211
316-262-7271
BaughmanCo.com

FIREFLY WAY ADDITION
Phase 5

WOODSPRING CT.

STREET IMPROVEMENTS

PROJECT NUMBER:
20-06-E608

DESIGN: AEG DRAWN: TMS

DATE: May 17, 2021

SHEET OF
4 28

File: E:\Projects\Firefly Way-Ritchie_16-04-P195\Engineering\Phase 5\Sts\SWS\STR\Revs.dwg