


SCALE: 1"=20'

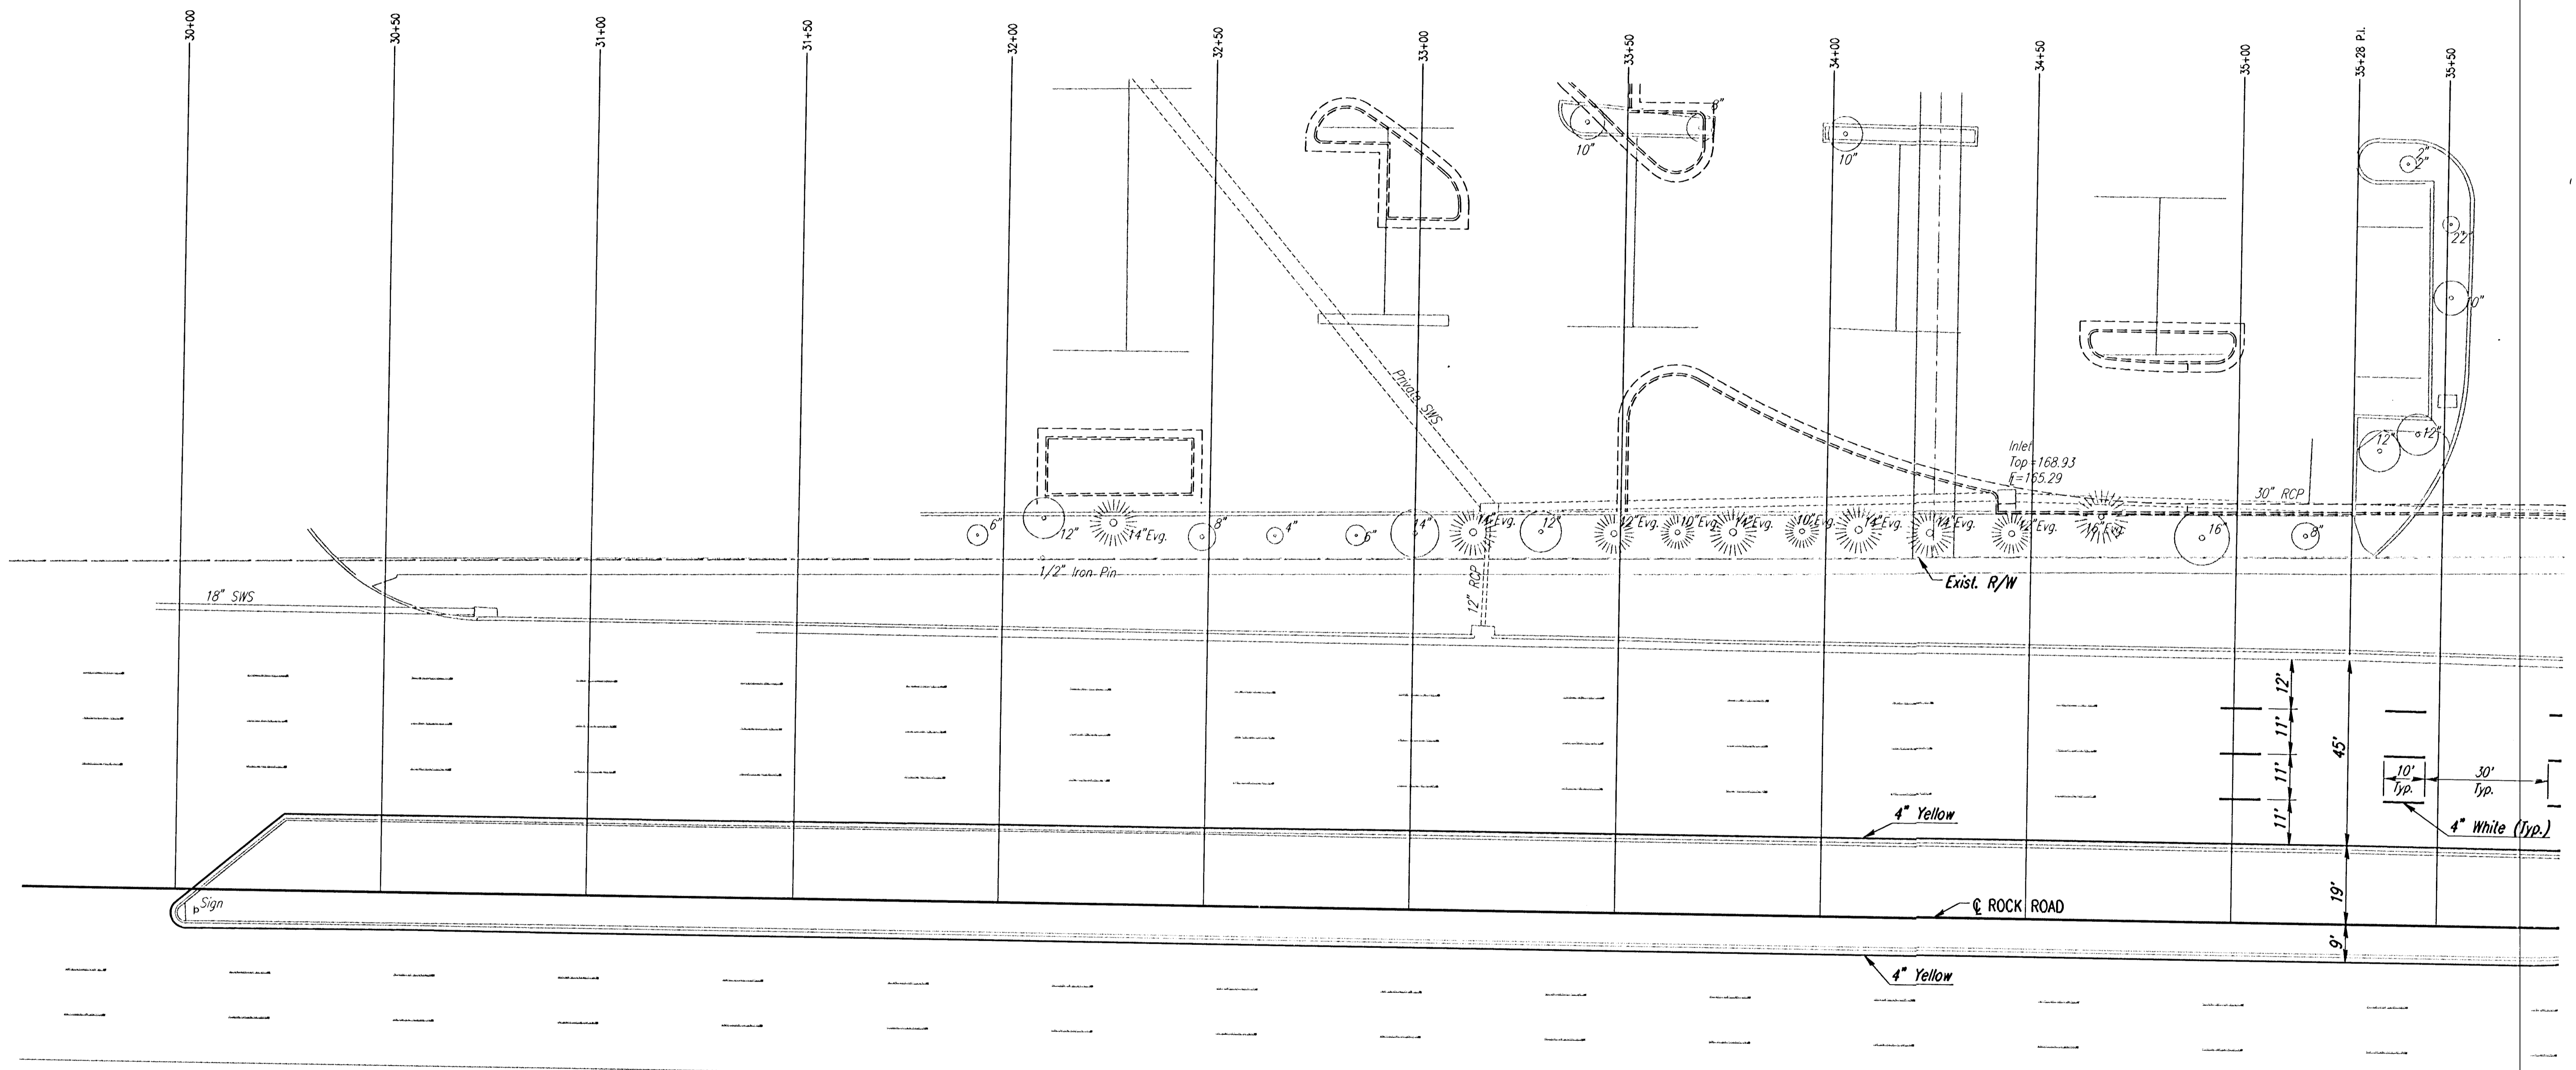

DSNR: PMM OPER: BJS SCALE: 1"=20'  
 1/1999/99687/001/ROCK1MRK.DGN 6-27-2000

Words & Symbols shall conform to the latest edition of "Standard Alphabets for Highway Signs and Pavement Markings" printed by the U.S. Department of Transportation, Federal Highway Administration.

SUMMARY OF PAVEMENT & SYMBOL MARKINGS							
LOCATION	4" DOTTED WHITE EXTENSION LINE	4" SOLID YELLOW LINE	4" BROKEN WHITE LANE LINE	4" SOLID WHITE LANE LINE	24" SOLID WHITE STOP LINE	↶	↷
ROCK ROAD	262	2,638	2,560	1,180	107	2	13

RECAPITULATION OF QUANTITIES		
ITEM	TOTAL	UNITS
PAVT. MARKING (THERMOPLASTIC)(WHITE)(4")	4,002	LIN. FT.
PAVT. MARKING (THERMOPLASTIC)(WHITE)(24")	107	LIN. FT.
PAVT. MARKING (THERMOPLASTIC)(YELLOW)(4")	2,638	LIN. FT.
PAVT. MARKING SYMBOL (THERMOPLASTIC)(WHITE)	15	EACH

*Note: All Existing Marking which Conflict with the Proposed Plan shall be Removed. This work shall be Subsidiary to the Lump Sum Bid Item "Pavement Markings".*

*Unless Otherwise Noted, Dimensions are from & Stripe to & Stripe.*

No.		Revisions		By	Date
CITY OF WICHITA, KANSAS					
<b>ROCK ROAD MARKING AND SIGNING PLAN</b>					
STA.30+00 TO STA.35+50					
<b>Professional Engineering Consultants, P.A.</b> <small>303 S. TOPEKA • WICHITA, KANSAS 67202          316-262-2691 • FAX 316-262-3003</small>					
Designed by	BER, PMM	Checked by			
Drawn by	BJS	Date	MARCH 2000	Job No.	99687-1