

STORM WATER DRAIN #228
to serve
KRUG NORTH 2ND ADDITION - PHASE II
CITY OF WICHITA, KANSAS

James L. Armour, P.E. City Engineer

Project Number

468-83793

O.C.A. Number

751405


Benchmarks

BM #1: "□" Cut in middle of
N headwall of RCBC on 21st
St. North. 1004.3' W & 22.1'
N of SE Cor., SE 1/4, Sec. 2,
T-27-S, R-2-E.
Elev. = 173.23 City Datum

BM #2: "□" Cut at the SE
corner of the intersection of
Castle Rock & Castle Rock Ct.,
Krug North Addition.
Elev. = 183.50 City Datum

Sheet Index

Title Sheet	1
Mass Grading Plan/Erosion Control Plan	2-4
Pond Plan	5
Pond Cross Sections	6-8
SWS Line 1	9-11
SWS Line 1A	12
SWS Line 1B	13
SWS Line 2	14
SWS Line 3 & Line 3A	15
Std. Type 1A Single Inlet Detail	16
Std. Type 1A Double Inlet Detail	17
City RC Manhole Detail	18
Standard Manhole Detail	19
MH Ring & Cover Detail	20
Special Yard Inlet Detail	21
Manhole Inlet Detail	22
Headwall Detail	23
Soil Erosion BMP Details	24-27
Copy of Plat	28

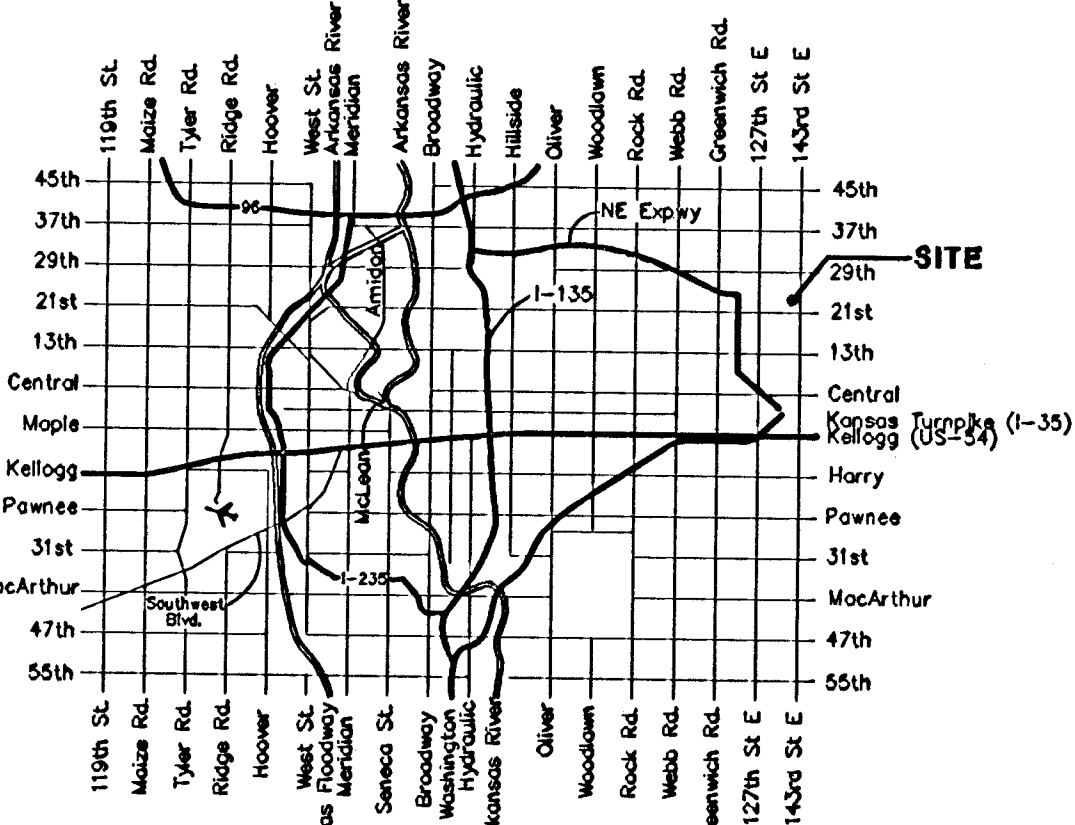

Vicinity Map



GENERAL NOTES:

- Contractor will be required to provide notice to utility companies a minimum of twenty-four (24) hours prior to any excavation, as follows:

Kansas One-Call 687-2470

The Contractor must notify the following in case of an emergency:

Cox Communications 262-4270
Kansas Gas Service 1-888-482-4950
Westor Energy 383-6650
Aquila Energy 1-800-303-0357
Southwestern Bell 268-2245
City of Wichita Water Dept. 268-4563
City of Wichita Sewer Maint. 268-4024
City of Wichita Storm Sewer Maint. 268-4090
City of Wichita Traffic Maint. 268-4034
Conoco Pipeline Co. 1-800-231-2551
Williams Pipeline Co. 529-6600
Phillips Pipeline Co. 1-800-766-8230
- Utility service lines, poles, valve boxes, meters, and etcetera are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
- Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance on site location. Locations, in the opinion of the Engineer, will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.
- Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor with the Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.
- The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days advance notice prior to start of construction.
- The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws.
- All areas disturbed by construction shall be seeded as indicated on Pond Plan.
- This project is subject to a current SWPP Plan. Contractor shall comply with any unusual requirements as necessary for site to be in compliance during construction.
- All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on-site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on-site engineer until project is accepted by City of Wichita. Maintenance and/or replacement of erosion control measures to be paid by L.S. bid item "Erosion Control BMP's."
- All excess excavation shall remain on-site and shall be stockpiled or spread at a location determined by the engineer. Contractor will not be required to provide borrow if shortage of material occurs. If shortage of material does occur contractor shall contact engineer for area not to be mass graded.
- At conclusion of construction, an as-built survey will be completed by the engineer. The contractor will be required to finish and smooth grade all locations as necessary that are not within $\pm 0.2'$ of plan grade. The contractor shall include all costs associated with the regrading and/or remediation in the bid item "Mass Grading."
- The developer for this project is Ritchie Associates, the contact person is Rob Ramseyer, and may be reached at (316) 684-7300.

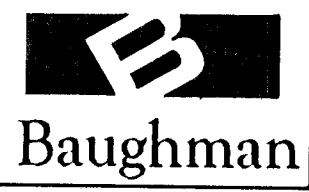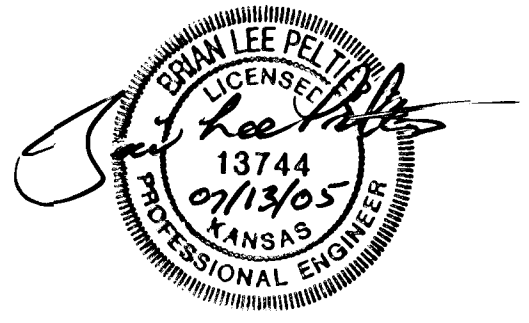

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0145
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE