


BENCHMARKS:
 Brass benchmark disc in top of curb, east of wheelchair ramp NE cor. of Funston and Lynnae Elev. = 1343.69 NAVD88

Brass benchmark disc in top of curb, north of wheelchair ramp NW cor. of Funston and Herrington Elev. = 1344.71 NAVD88



EROSION CONTROL MEASURE	INSTALL	MAINTAIN
CONSTRUCTION ENTRANCE (EA)	0	1

* ALL EXISTING BMPs INCLUDING CONSTRUCTION ENTRANCE, SEDIMENT BARRIERS, SILT FENCE, CUT-OFF TRENCH, AND EROSION CONTROL MAT SHALL BE MAINTAINED AND REPAIRED IF NECESSARY.

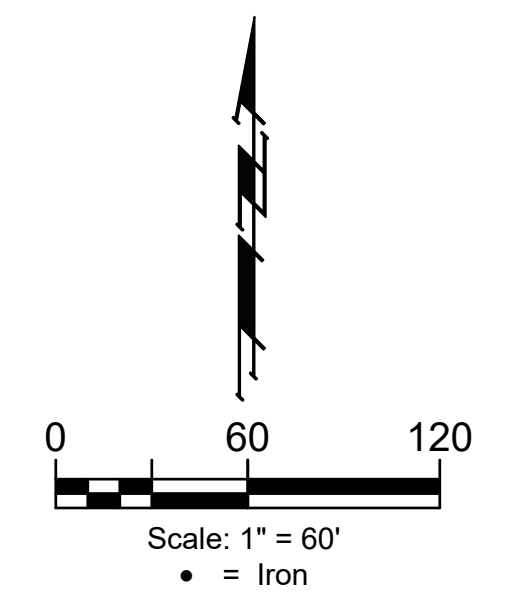

- NOTES:**
- Contractor shall make sure all erosion control is in place before project is accepted. This plan represents the minimum standard. Any additional erosion control measures shall be installed by the Contractor as needed.
 - All areas disturbed during construction shall be seeded per Cover Sheet General Notes.

Existing Ground - - - - - 1364 - - - - -

BAUGHMAN COMPANY

315 Ellis St.
 Wichita, KS 67211
 316-262-7271
 BaughmanCo.com

WILLOW CREEK EAST 3RD
 ADDITION - PHASE III

EROSION CONTROL

WATER DISTRIBUTION SYSTEM

PROJECT NUMBER:
 448-90950

DESIGN: DMV DRAWN: JAK
 DATE: July 17, 2023

SHEET **7** OF **14**

File: E:\Projects\Willow Creek East 3rd Addition - 17-04-P283\Engineering\Phase 3\WTR_22-01-E097\WTR_22-01-E097.dwg