

PHASE 2 CONSTRUCTION



ALL TRAFFIC CONTROL DEVICES SHALL COMPLY TO THE CURRENT EDITIONS OF "THE BARRICADE MANUAL", CITY OF WICHITA, AND "THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS," FEDERAL HIGHWAY ADMINISTRATION.

TRAFFIC IS TO BE CARRIED THROUGH CONSTRUCTION AT ALL TIMES. ON KELLOGG, MAINTAIN FOUR OPEN LANES AT ALL TIMES, TWO LANES EACH DIRECTION. ON OLIVER, MAINTAIN TWO OPEN LANES AT ALL TIMES, ONE LANE EACH DIRECTION. ALL LEFT TURNS AT THE INTERSECTION OF OLIVER AND KELLOGG SHALL BE PROHIBITED DURING CONSTRUCTION.

MAINTAIN ALL SIGNS AND DEVICES IN THEIR PROPER POSITION AND WORKING CONDITION. COVER ANY PERMANENT SPEED LIMIT SIGNS WHICH CONFLICT WITH THE REDUCED SPEED LIMIT DURING CONSTRUCTION.


USE REFLECTORIZED SIGNS AND CHANNELIZATION DEVICES. DO NOT USE TRAFFIC CONES FOR NIGHTTIME OPERATIONS. SPACE CHANNELIZING DEVICES THIRTY-FIVE FEET APART AS SHOWN.

PROVIDE ACCESS TO PRIVATE PROPERTY AS MUCH OF THE TIME AS POSSIBLE.

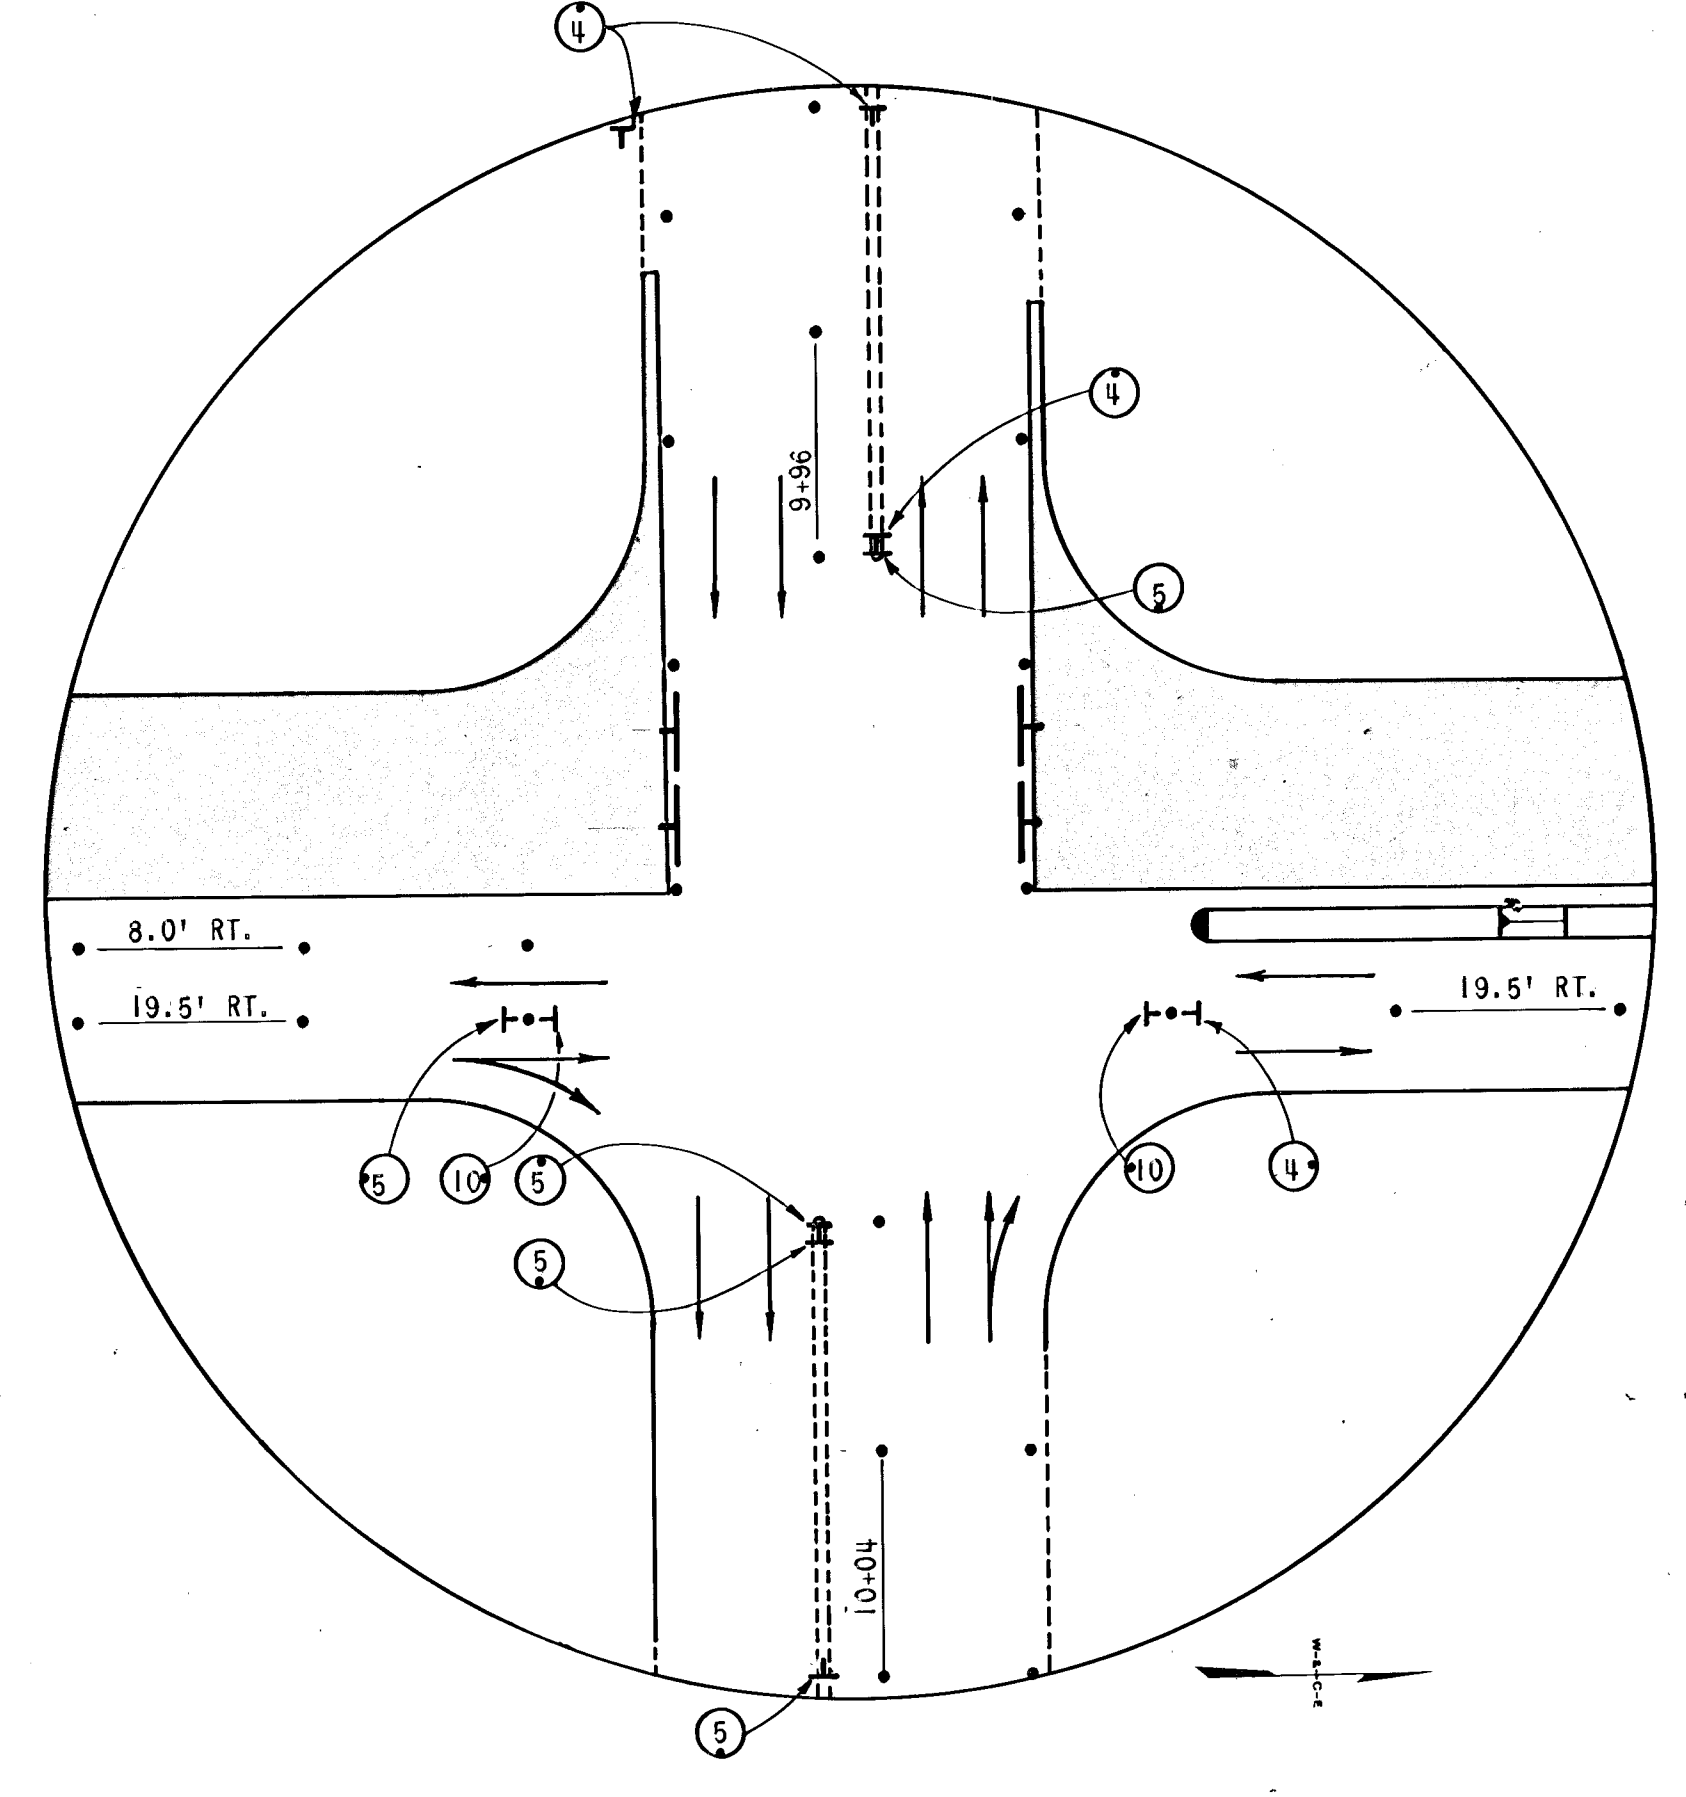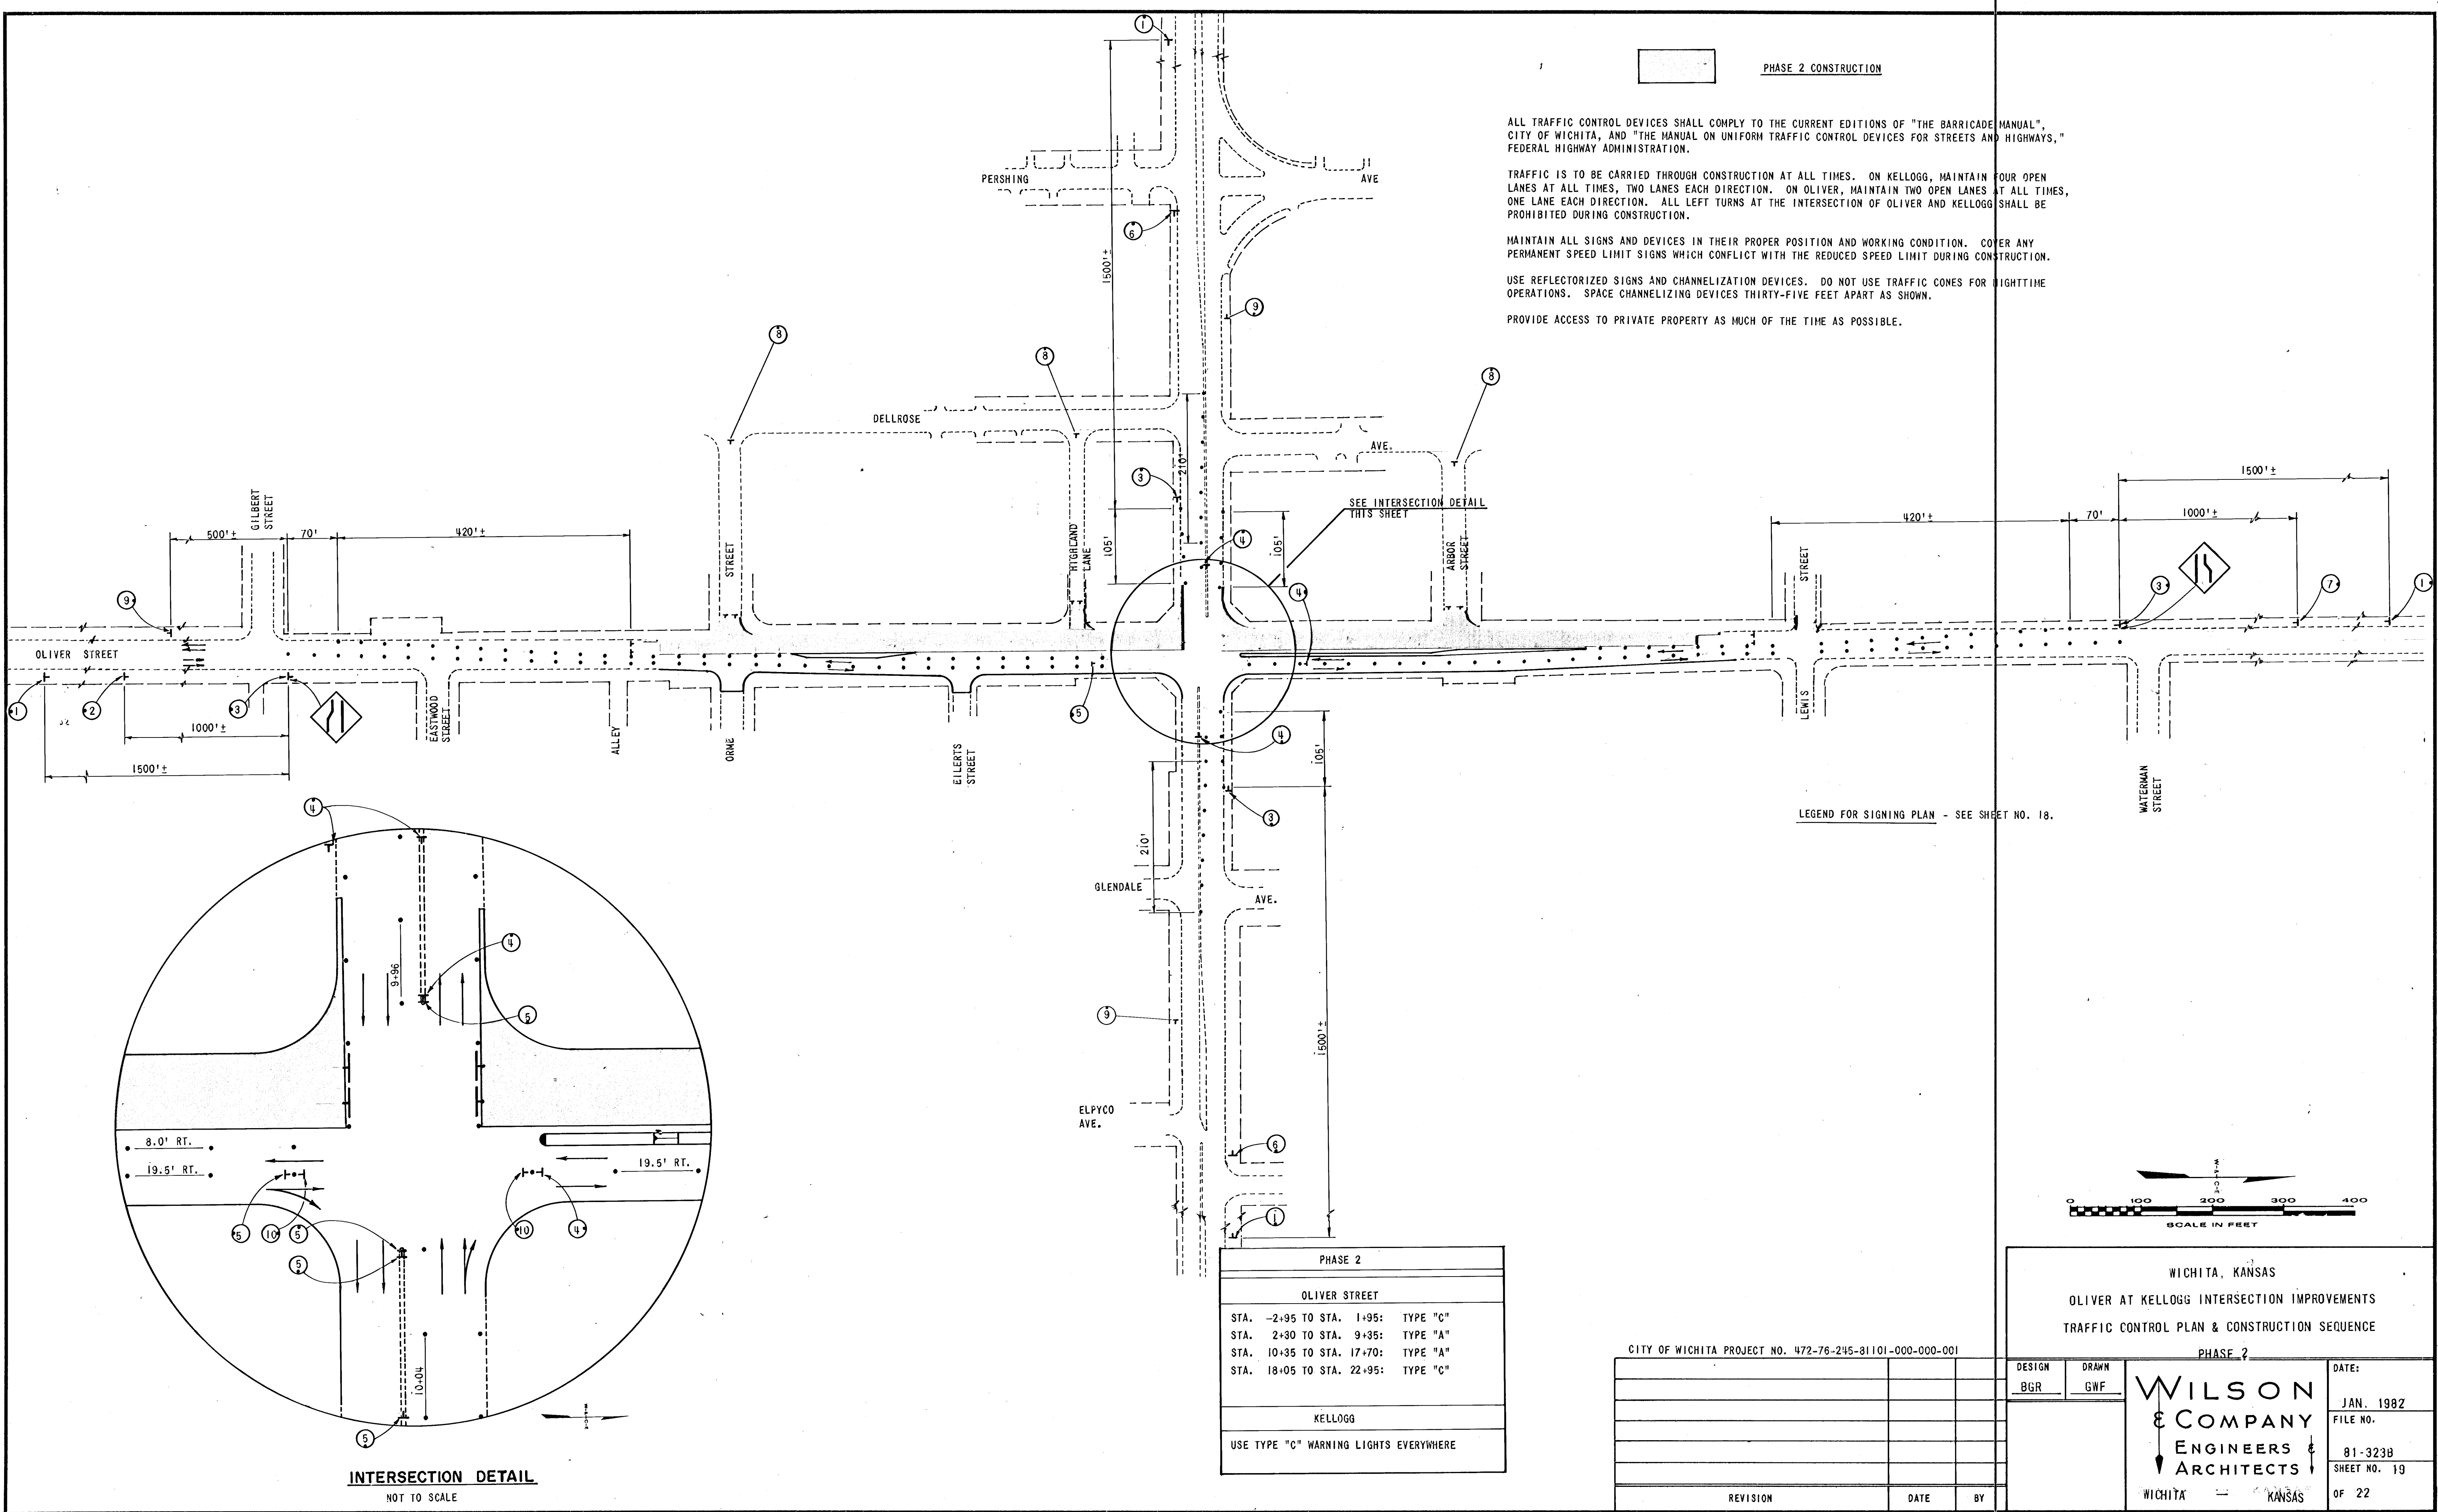

INTERSECTION DETAIL
NOT TO SCALE

LEGEND FOR SIGNING PLAN - SEE SHEET NO. 18.

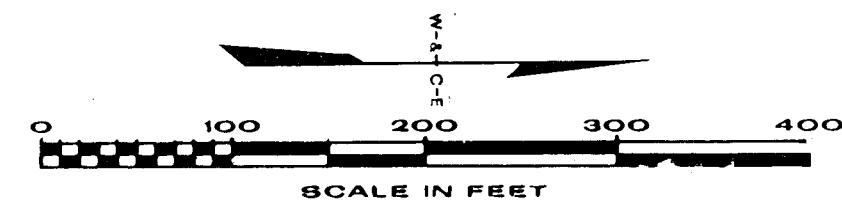

| PHASE 2 | |
|--|----------|
| OLIVER STREET | |
| STA. -2+95 TO STA. 1+95: | TYPE "C" |
| STA. 2+30 TO STA. 9+35: | TYPE "A" |
| STA. 10+35 TO STA. 17+70: | TYPE "A" |
| STA. 18+05 TO STA. 22+95: | TYPE "C" |
| KELLOGG | |
| USE TYPE "C" WARNING LIGHTS EVERYWHERE | |

| CITY OF WICHITA PROJECT NO. 472-76-245-81101-000-000-001 | | |
|--|------|----|
| REVISION | DATE | BY |
| | | |
| | | |
| | | |
| | | |

WICHITA, KANSAS
OLIVER AT KELLOGG INTERSECTION IMPROVEMENTS
TRAFFIC CONTROL PLAN & CONSTRUCTION SEQUENCE
PHASE 2

| | | |
|---------------|--------------|-----------------------|
| DESIGN BGR | DRAWN GWF | DATE: JAN. 1982 |
| | | FILE NO. 81-323B |
| | | SHEET NO. 19 OF 22 |