
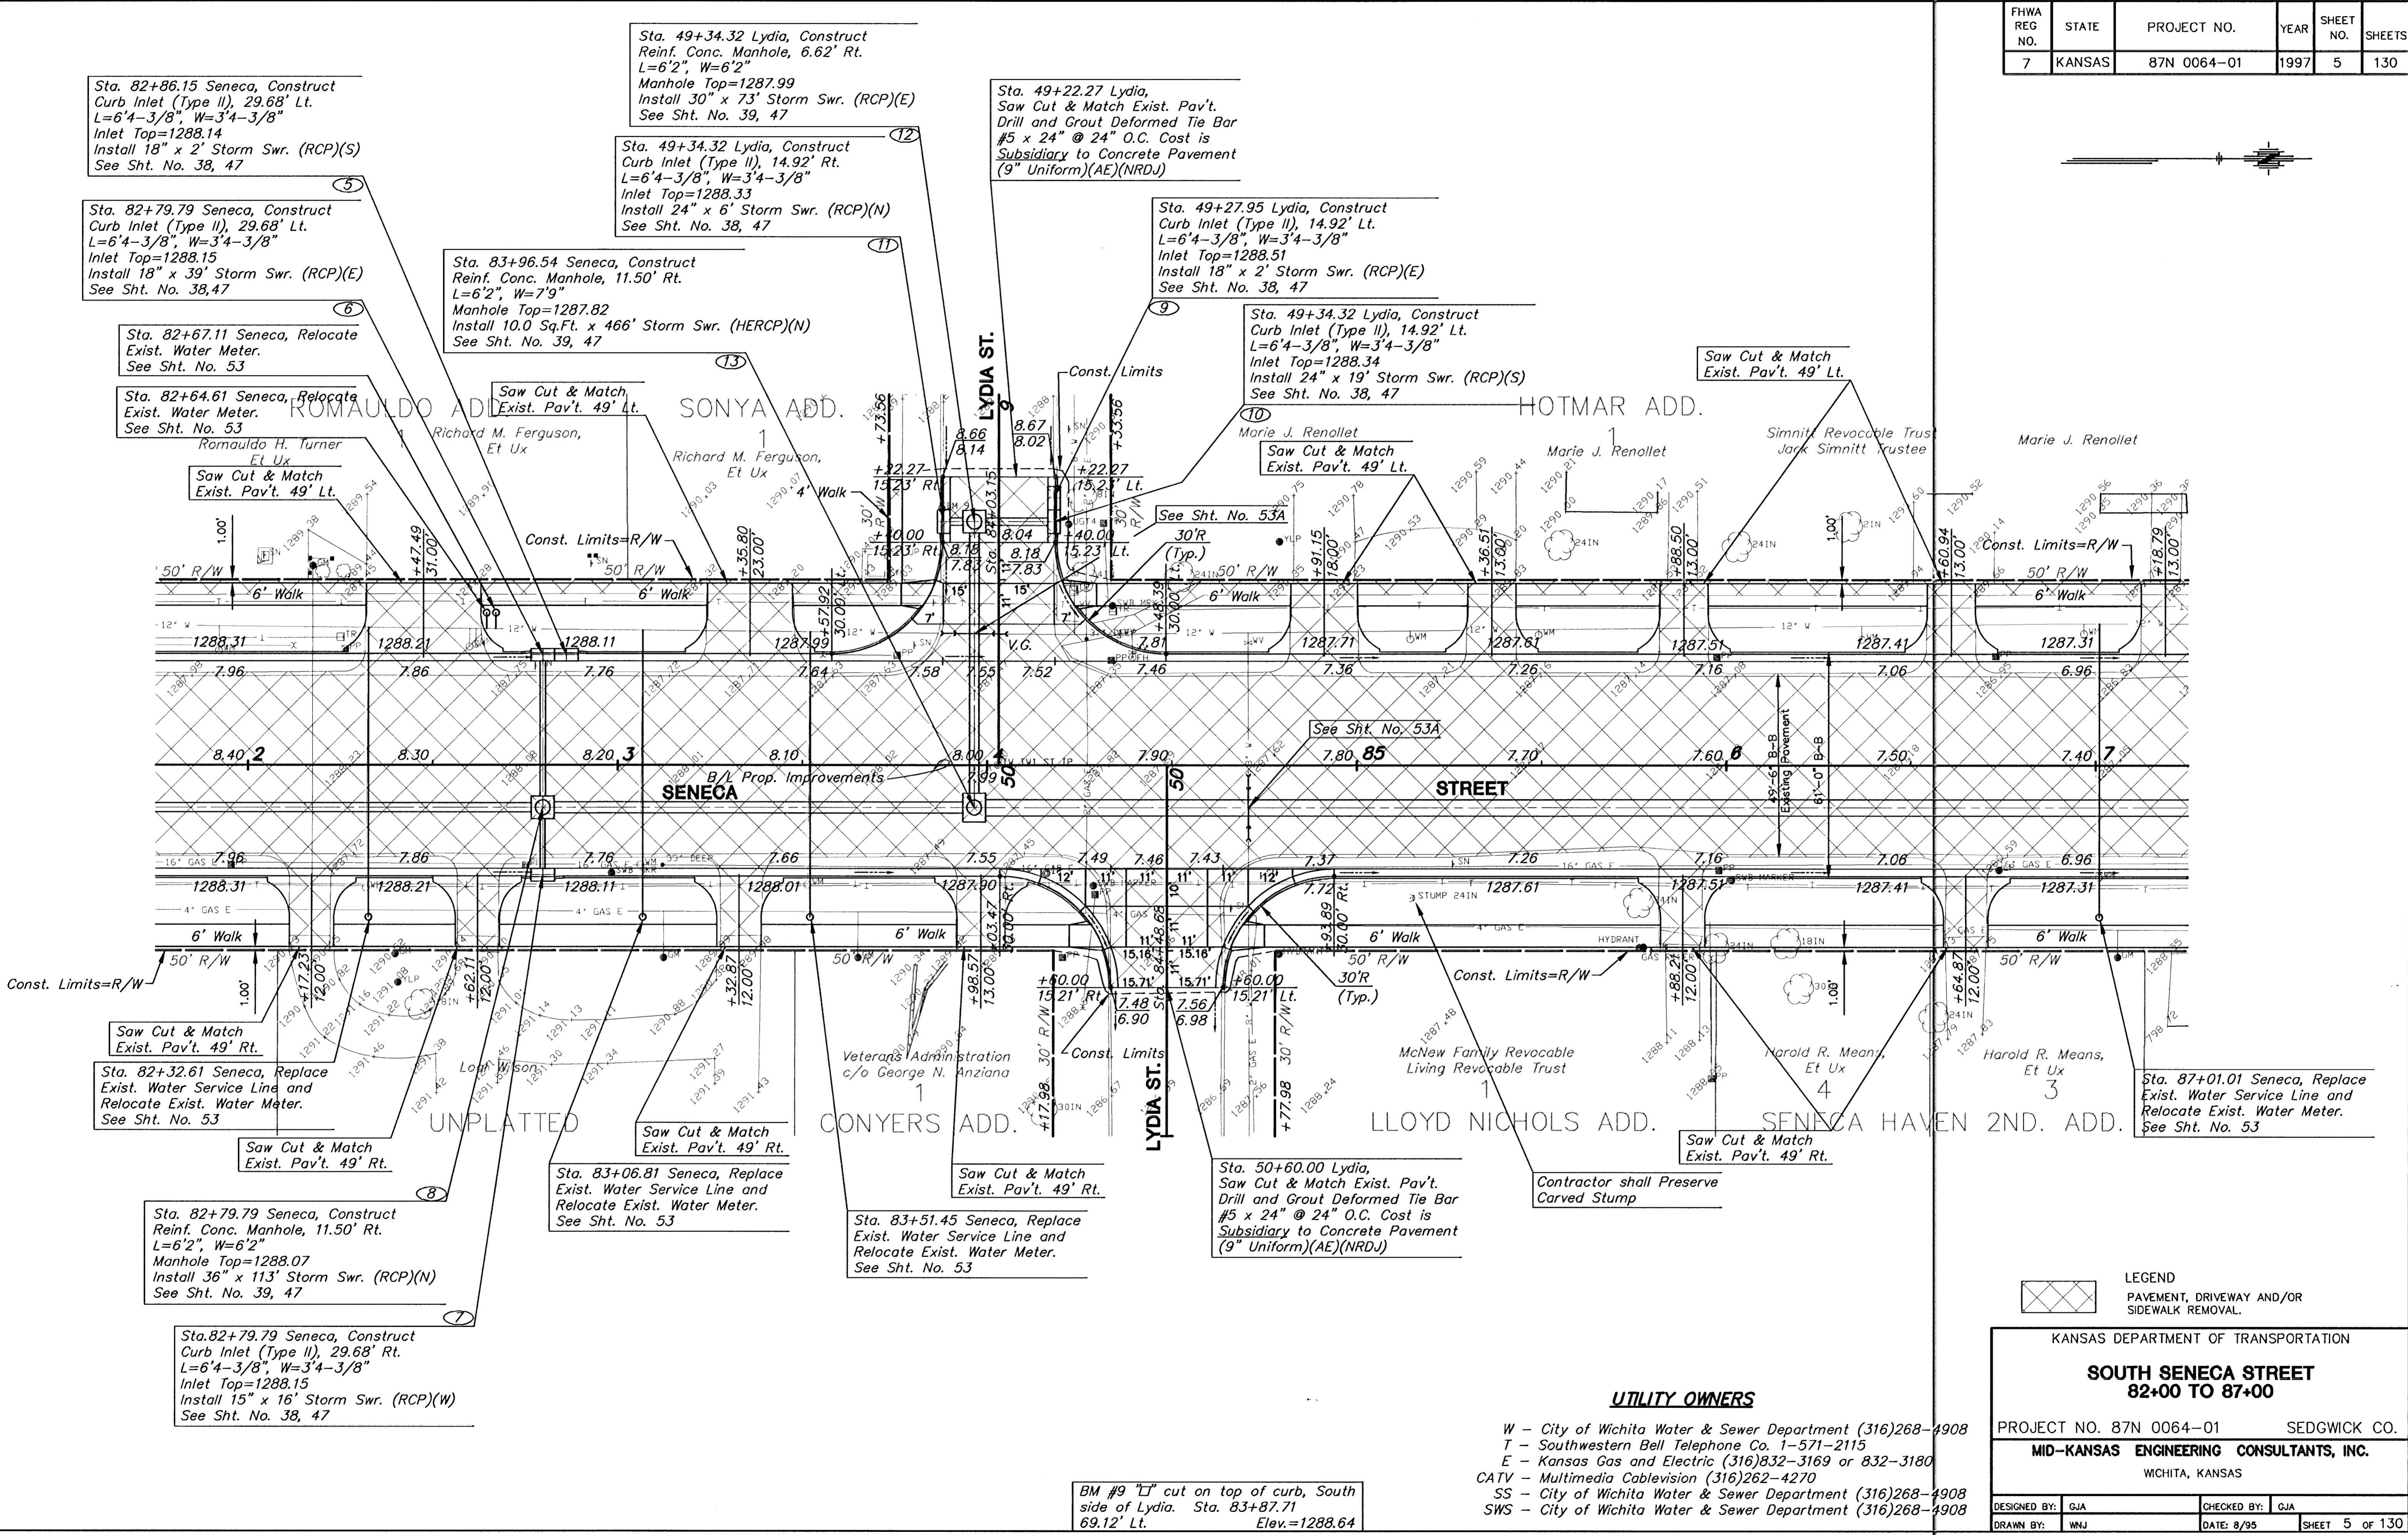


FHWA REG NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
7	KANSAS	87N 0064-01	1997	5	130

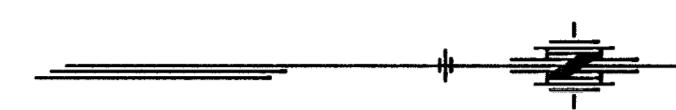

Sta. 82+86.15 Seneca, Construct Curb Inlet (Type II), 29.68' Lt. L=6'-4-3/8", W=3'-4-3/8" Inlet Top=1288.14 Install 18" x 2' Storm Swr. (RCP)(S) See Sht. No. 38, 47

Sta. 49+34.32 Lydia, Construct Reinf. Conc. Manhole, 6.62' Rt. L=6'-2", W=6'-2" Manhole Top=1287.99 Install 30" x 73' Storm Swr. (RCP)(E) See Sht. No. 39, 47

Sta. 49+22.27 Lydia, Saw Cut & Match Exist. Pav't. Drill and Grout Deformed Tie Bar #5 x 24" @ 24" O.C. Cost is Subsidiary to Concrete Pavement (9" Uniform)(AE)(NRDJ)

Sta. 49+27.95 Lydia, Construct Curb Inlet (Type II), 14.92' Lt. L=6'-4-3/8", W=3'-4-3/8" Inlet Top=1288.51 Install 18" x 2' Storm Swr. (RCP)(E) See Sht. No. 38, 47

Sta. 49+34.32 Lydia, Construct Curb Inlet (Type II), 14.92' Lt. L=6'-4-3/8", W=3'-4-3/8" Inlet Top=1288.34 Install 24" x 19' Storm Swr. (RCP)(S) See Sht. No. 38, 47

Saw Cut & Match Exist. Pav't. 49' Lt.

Sta. 82+79.79 Seneca, Construct Curb Inlet (Type II), 29.68' Lt. L=6'-4-3/8", W=3'-4-3/8" Inlet Top=1288.15 Install 18" x 39' Storm Swr. (RCP)(E) See Sht. No. 38, 47

Sta. 83+96.54 Seneca, Construct Reinf. Conc. Manhole, 11.50' Rt. L=6'-2", W=7'-9" Manhole Top=1287.82 Install 10.0 Sq.Ft. x 466' Storm Swr. (HERCP)(N) See Sht. No. 39, 47

Sta. 82+67.11 Seneca, Relocate Exist. Water Meter. See Sht. No. 53

Sta. 82+64.61 Seneca, Relocate Exist. Water Meter. See Sht. No. 53

Saw Cut & Match Exist. Pav't. 49' Lt.

Saw Cut & Match Exist. Pav't. 49' Lt.

Saw Cut & Match Exist. Pav't. 49' Lt.

Saw Cut & Match Exist. Pav't. 49' Rt.

Sta. 82+32.61 Seneca, Replace Exist. Water Service Line and Relocate Exist. Water Meter. See Sht. No. 53

Saw Cut & Match Exist. Pav't. 49' Rt.

Sta. 82+79.79 Seneca, Construct Reinf. Conc. Manhole, 11.50' Rt. L=6'-2", W=6'-2" Manhole Top=1288.07 Install 36" x 113' Storm Swr. (RCP)(N) See Sht. No. 39, 47

Sta. 82+79.79 Seneca, Construct Curb Inlet (Type II), 29.68' Lt. L=6'-4-3/8", W=3'-4-3/8" Inlet Top=1288.15 Install 15" x 16' Storm Swr. (RCP)(W) See Sht. No. 38, 47

Sta. 83+06.81 Seneca, Replace Exist. Water Service Line and Relocate Exist. Water Meter. See Sht. No. 53

Saw Cut & Match Exist. Pav't. 49' Rt.

Sta. 83+51.45 Seneca, Replace Exist. Water Service Line and Relocate Exist. Water Meter. See Sht. No. 53

Saw Cut & Match Exist. Pav't. 49' Rt.

Sta. 50+60.00 Lydia, Saw Cut & Match Exist. Pav't. Drill and Grout Deformed Tie Bar #5 x 24" @ 24" O.C. Cost is Subsidiary to Concrete Pavement (9" Uniform)(AE)(NRDJ)

Contractor shall Preserve Carved Stump

Sta. 87+01.01 Seneca, Replace Exist. Water Service Line and Relocate Exist. Water Meter. See Sht. No. 53

BM #9 "I" cut on top of curb, South side of Lydia. Sta. 83+87.71 Elev.=1288.64

LEGEND
 PAYEMENT, DRIVEWAY AND/OR SIDEWALK REMOVAL.

KANSAS DEPARTMENT OF TRANSPORTATION

**SOUTH SENECA STREET
82+00 TO 87+00**

PROJECT NO. 87N 0064-01 SEDGWICK CO.

MID-KANSAS ENGINEERING CONSULTANTS, INC.
WICHITA, KANSAS

DESIGNED BY: GJA CHECKED BY: GJA
 DRAWN BY: WNJ DATE: 8/95 SHEET 5 OF 130

- UTILITY OWNERS**
- W - City of Wichita Water & Sewer Department (316)268-4908
 - T - Southwestern Bell Telephone Co. 1-571-2115
 - E - Kansas Gas and Electric (316)832-3169 or 832-3180
 - CATV - Multimedia Cablevision (316)262-4270
 - SS - City of Wichita Water & Sewer Department (316)268-4908
 - SWS - City of Wichita Water & Sewer Department (316)268-4908

K:\CIVIL\SENECA\PAVE\84000E10.FPL May 30 10:57:43 1997

84000E10