
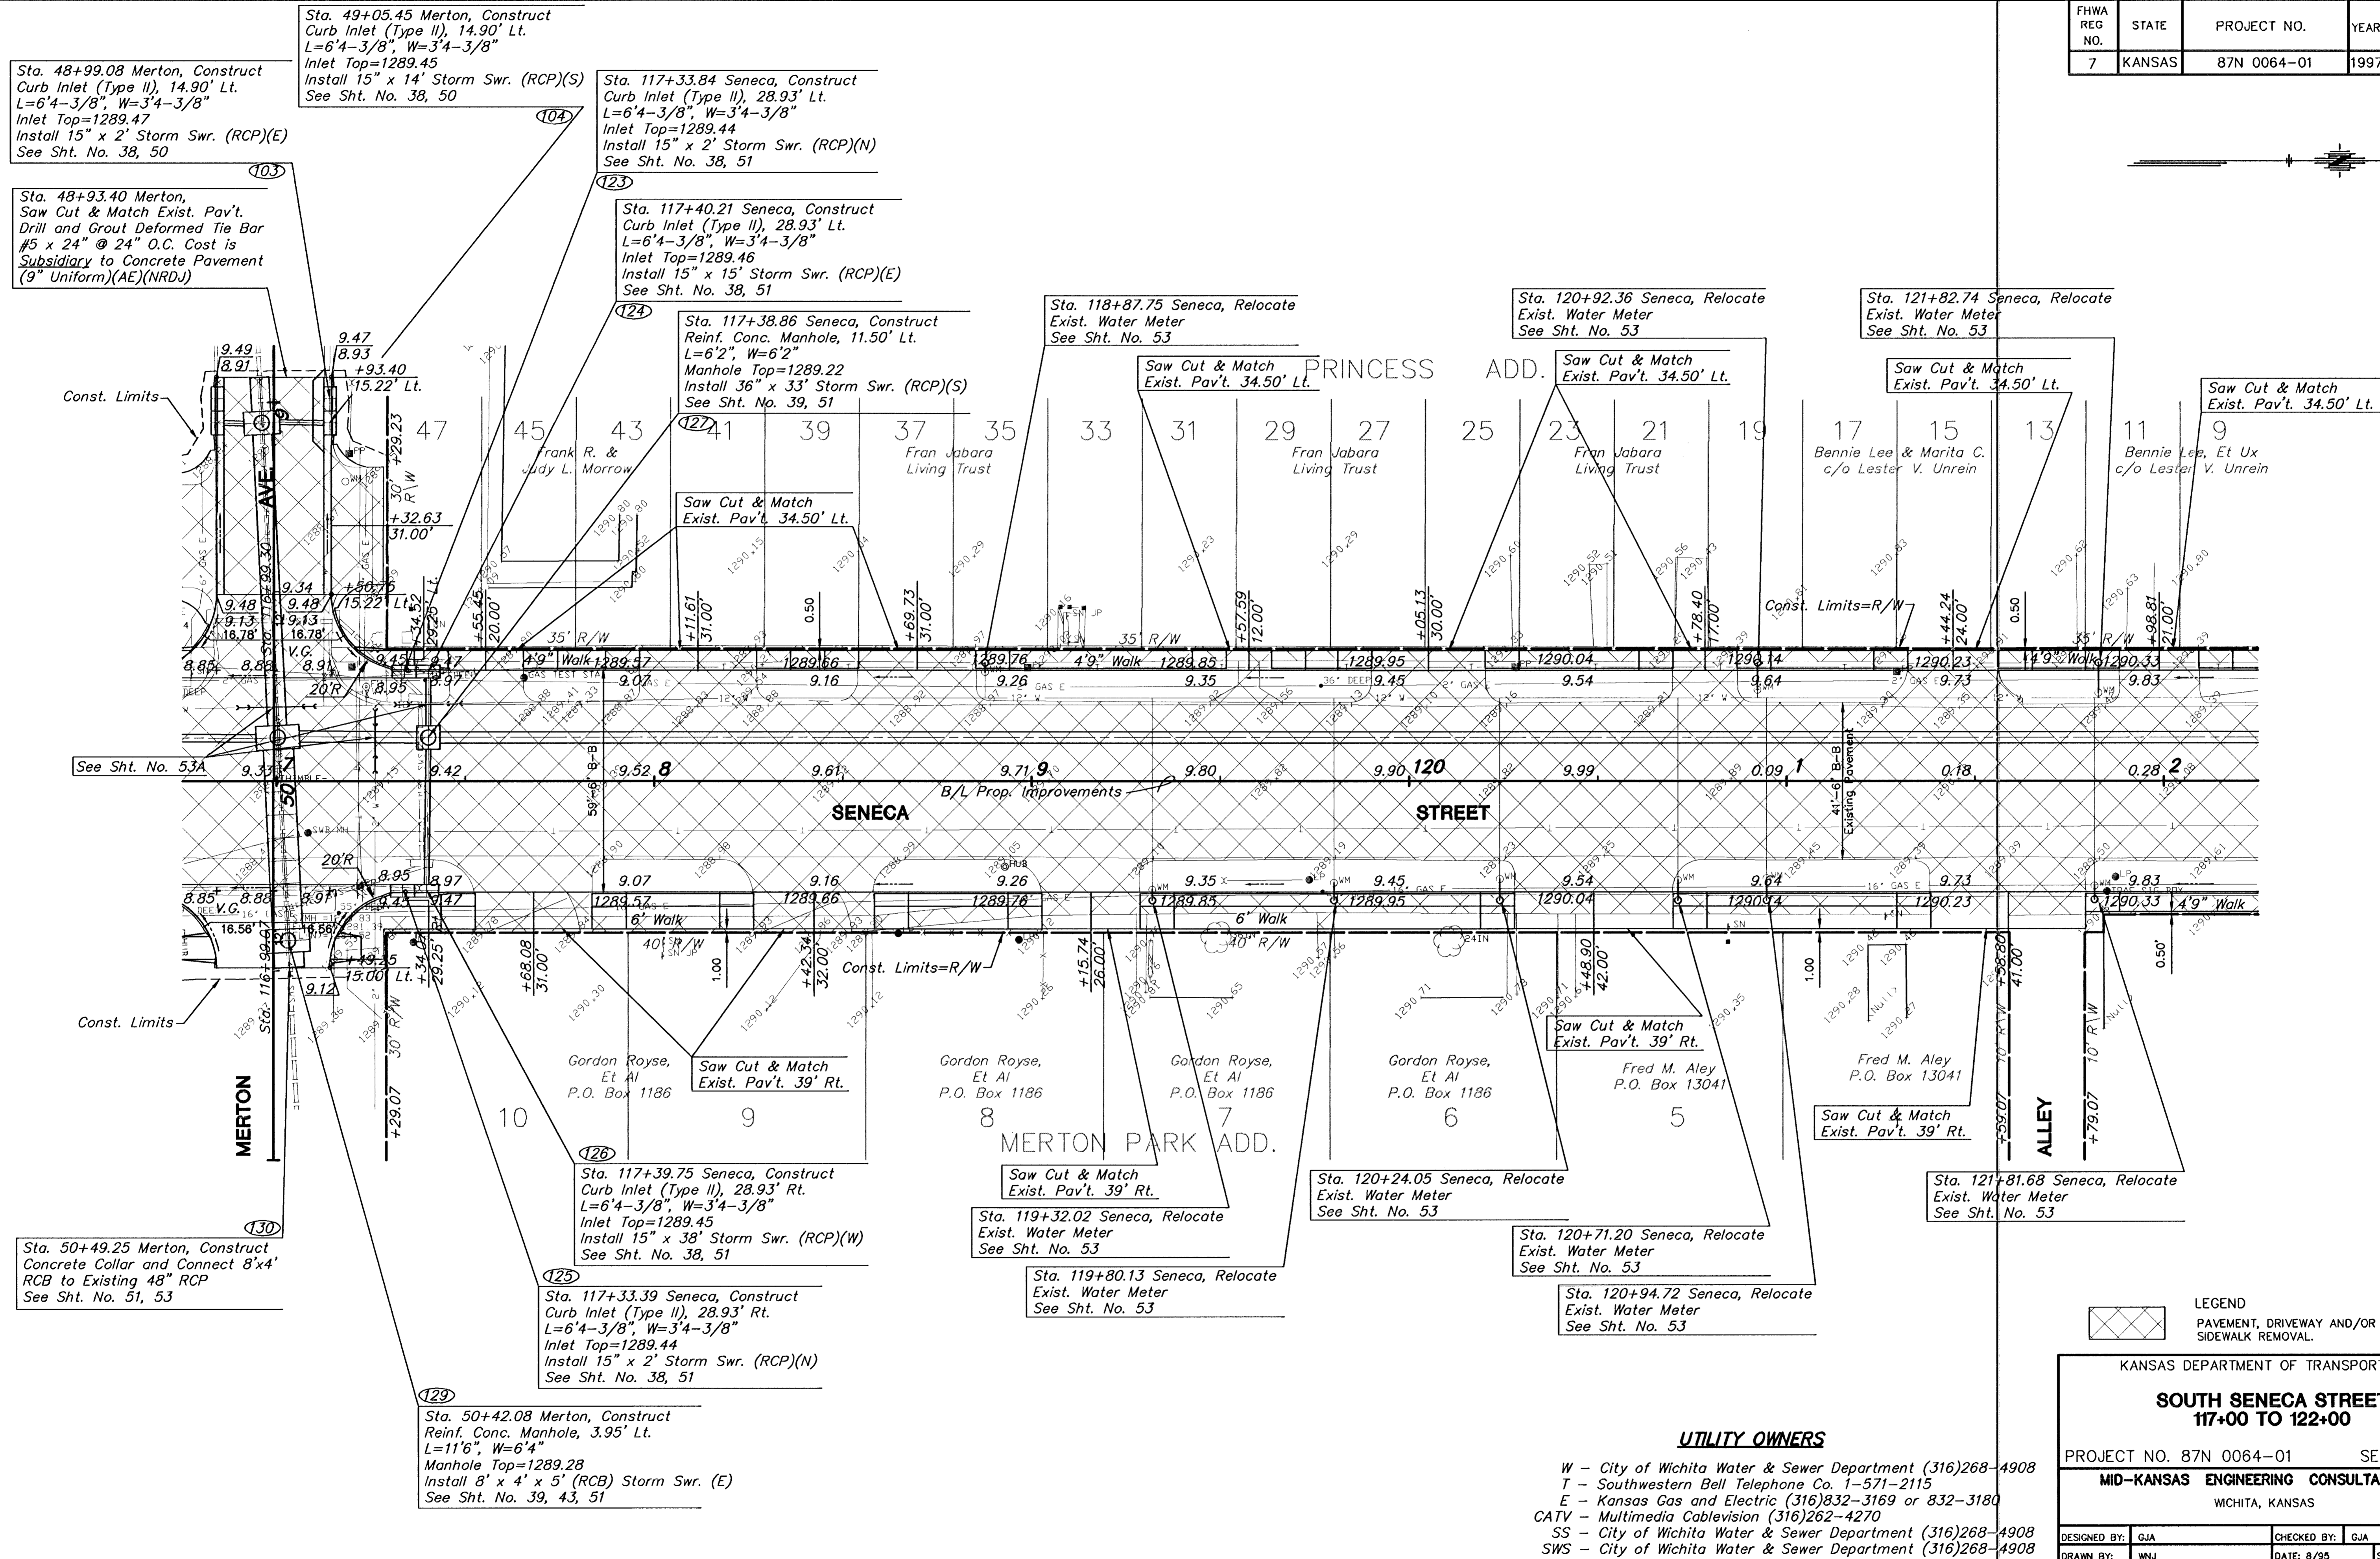


FHWA REG. NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
7	KANSAS	87N 0064-01	1997	19	130

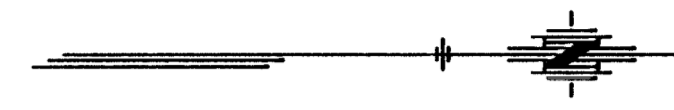

Sta. 48+99.08 Merton, Construct Curb Inlet (Type II), 14.90' Lt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.47 Install 15" x 2' Storm Swr. (RCP)(E) See Sht. No. 38, 50

Sta. 48+93.40 Merton, Saw Cut & Match Exist. Pav't. Drill and Grout Deformed Tie Bar #5 x 24" @ 24" O.C. Cost is Subsidiary to Concrete Pavement (9" Uniform)(AE)(NRDU)

Sta. 49+05.45 Merton, Construct Curb Inlet (Type II), 14.90' Lt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.45 Install 15" x 14' Storm Swr. (RCP)(S) See Sht. No. 38, 50

Sta. 117+33.84 Seneca, Construct Curb Inlet (Type II), 28.93' Lt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.44 Install 15" x 2' Storm Swr. (RCP)(N) See Sht. No. 38, 51

Sta. 117+40.21 Seneca, Construct Curb Inlet (Type II), 28.93' Lt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.46 Install 15" x 15' Storm Swr. (RCP)(E) See Sht. No. 38, 51

Sta. 117+38.86 Seneca, Construct Reinf. Conc. Manhole, 11.50' Lt. L=6'2", W=6'2" Manhole Top=1289.22 Install 36" x 33' Storm Swr. (RCP)(S) See Sht. No. 39, 51

Sta. 118+87.75 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 120+92.36 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 121+82.74 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Saw Cut & Match Exist. Pav't. 34.50' Lt.

Sta. 50+49.25 Merton, Construct Concrete Collar and Connect 8'x4' RCB to Existing 48" RCP See Sht. No. 51, 53

Sta. 117+39.75 Seneca, Construct Curb Inlet (Type II), 28.93' Rt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.45 Install 15" x 38' Storm Swr. (RCP)(W) See Sht. No. 38, 51

Sta. 117+33.39 Seneca, Construct Curb Inlet (Type II), 28.93' Rt. L=6'4-3/8", W=3'4-3/8" Inlet Top=1289.44 Install 15" x 2' Storm Swr. (RCP)(N) See Sht. No. 38, 51

Sta. 50+42.08 Merton, Construct Reinf. Conc. Manhole, 3.95' Lt. L=11'6", W=6'4" Manhole Top=1289.28 Install 8' x 4' x 5' (RCB) Storm Swr. (E) See Sht. No. 39, 43, 51

Saw Cut & Match Exist. Pav't. 39' Rt.

Sta. 119+32.02 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 119+80.13 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 120+24.05 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 120+71.20 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 120+94.72 Seneca, Relocate Exist. Water Meter See Sht. No. 53

Sta. 121+81.68 Seneca, Relocate Exist. Water Meter See Sht. No. 53

LEGEND
PAVEMENT, DRIVEWAY AND/OR SIDEWALK REMOVAL.

KANSAS DEPARTMENT OF TRANSPORTATION

**SOUTH SENECA STREET
117+00 TO 122+00**

PROJECT NO. 87N 0064-01 SEDGWICK CO.

MID-KANSAS ENGINEERING CONSULTANTS, INC.
WICHITA, KANSAS

DESIGNED BY: GJA	CHECKED BY: GJA
DRAWN BY: WNJ	DATE: 8/95 SHEET 19 OF 130

UTILITY OWNERS

- W - City of Wichita Water & Sewer Department (316)268-4908
- T - Southwestern Bell Telephone Co. 1-571-2115
- E - Kansas Gas and Electric (316)832-3169 or 832-3180
- CATV - Multimedia Cablevision (316)262-4270
- SS - City of Wichita Water & Sewer Department (316)268-4908
- SWS - City of Wichita Water & Sewer Department (316)268-4908