


BENCHMARK
 119th St. W. & Pawnee
 City of Wichita Benchmark Disc.
 NE corner of intersection. 40' E
 and 30' N of centerline. 59.5' N of
 power pole @ SE corner of
 intersection. 156.8' NNE of
 centerline of E concrete headwall on
 culvert under 119th St. W.
 Elev. = 148.68 (City Datum)
 Elev. = 1336.08 (N.G.V.D.29)

TURKEY CREEK 2ND ADDITION

SCALE:
 1" = 40' HORIZONTAL
 1" = 5' VERTICAL
 • = IRON

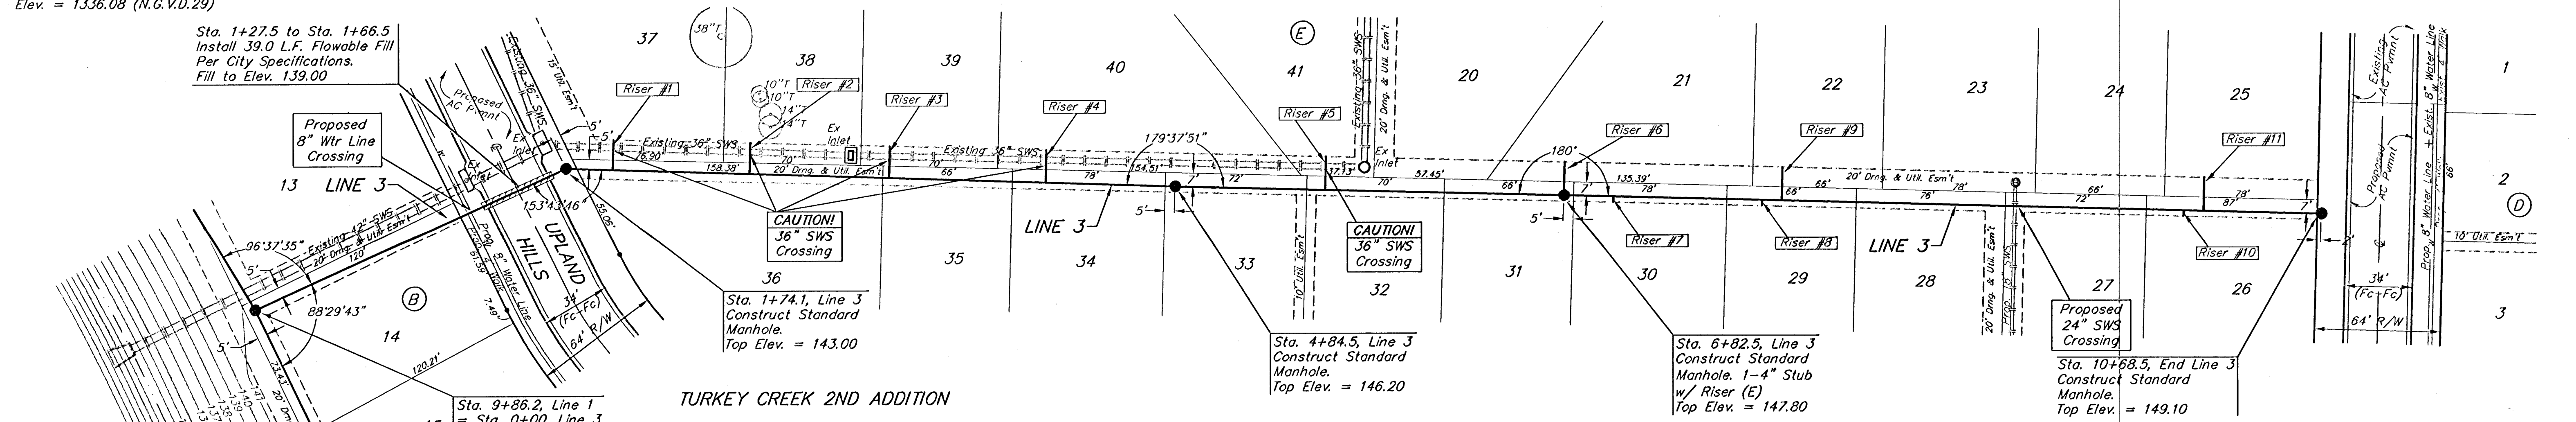

SEWER SERVICE TABLE


NUMBER	TYPE	LOCATION			FOR INFORMATION ONLY	
		LOT NO.	BLOCK NO.	LINE NO.	STATION/DIRECTION	APPROXIMATE LENGTH 4" PIPE
1	10" X 4" Tee Saddle	37	E	3	2+00/Lt.	4' 17"
2	10" X 4" Tee Saddle	38	E	3	2+70/Lt.	4.5' 17"
3	10" X 4" Tee Saddle	39	E	3	3+40/Lt.	5' 17"
4	10" X 4" Tee Saddle	40	E	3	4+20/Lt.	6' 17"
5	10" X 4" Tee Saddle	41	E	3	5+61/Lt.	6.5' 17"

SEWER SERVICE TABLE

NUMBER	TYPE	LOCATION			FOR INFORMATION ONLY	
		LOT NO.	BLOCK NO.	LINE NO.	STATION/DIRECTION	APPROXIMATE LENGTH 4" PIPE
6	4" Stub w/ Riser	21	E	3	6+82.5/Lt.	7.5' 17"
7	10" X 4" Tee Saddle	30	E	3	7+08/Rt.	7.5' 3'
8	10" X 4" Tee Saddle	29	E	3	7+84/Rt.	7.5' 3'
9	10" X 4" Tee Saddle	22	E	3	7+94/Lt.	7.5' 17"
10	10" X 4" Tee Saddle	26	E	3	9+98/Rt.	7' 3'
11	10" X 4" Tee Saddle	25	E	3	10+08/Lt.	7' 17"

NOTE: Vertical Riser Pipe shall be extended to 2' minimum above ground water elevation and 4' maximum below proposed ground elevation.

Pond data:
 Static ws elev. = 132.0
 100-yr ws elev. is
 Variable along reach

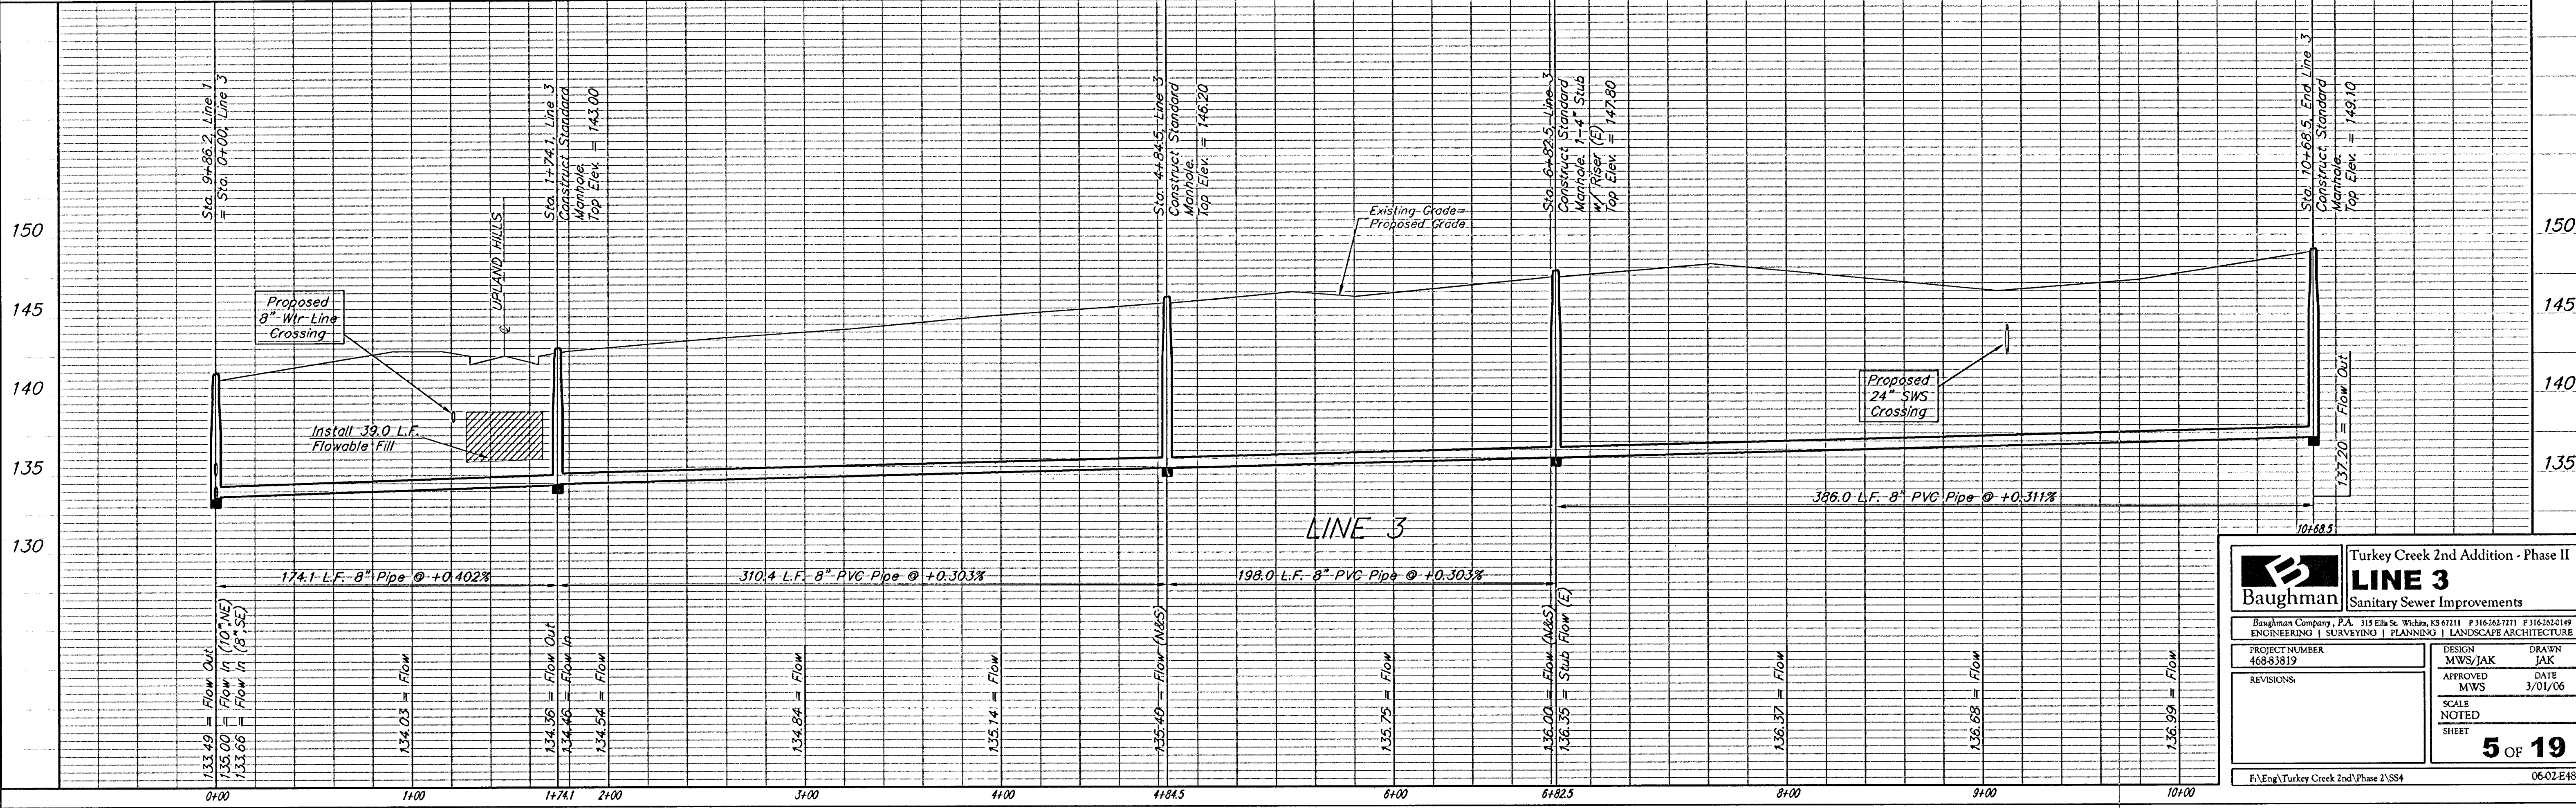

Baughman Turkey Creek 2nd Addition - Phase II
LINE 3
 Sanitary Sewer Improvements

PROJECT NUMBER: 468-83819
 DESIGN: MWS/JAK
 DRAWN: JAK
 APPROVED: MWS
 DATE: 3/01/06
 SCALE: NOTED
 SHEET: 5 OF 19

F:\Eng\Turkey Creek 2nd\Phase 2\SS4 0602E480