

NORTH RIDGE VILLAGE ADDITION

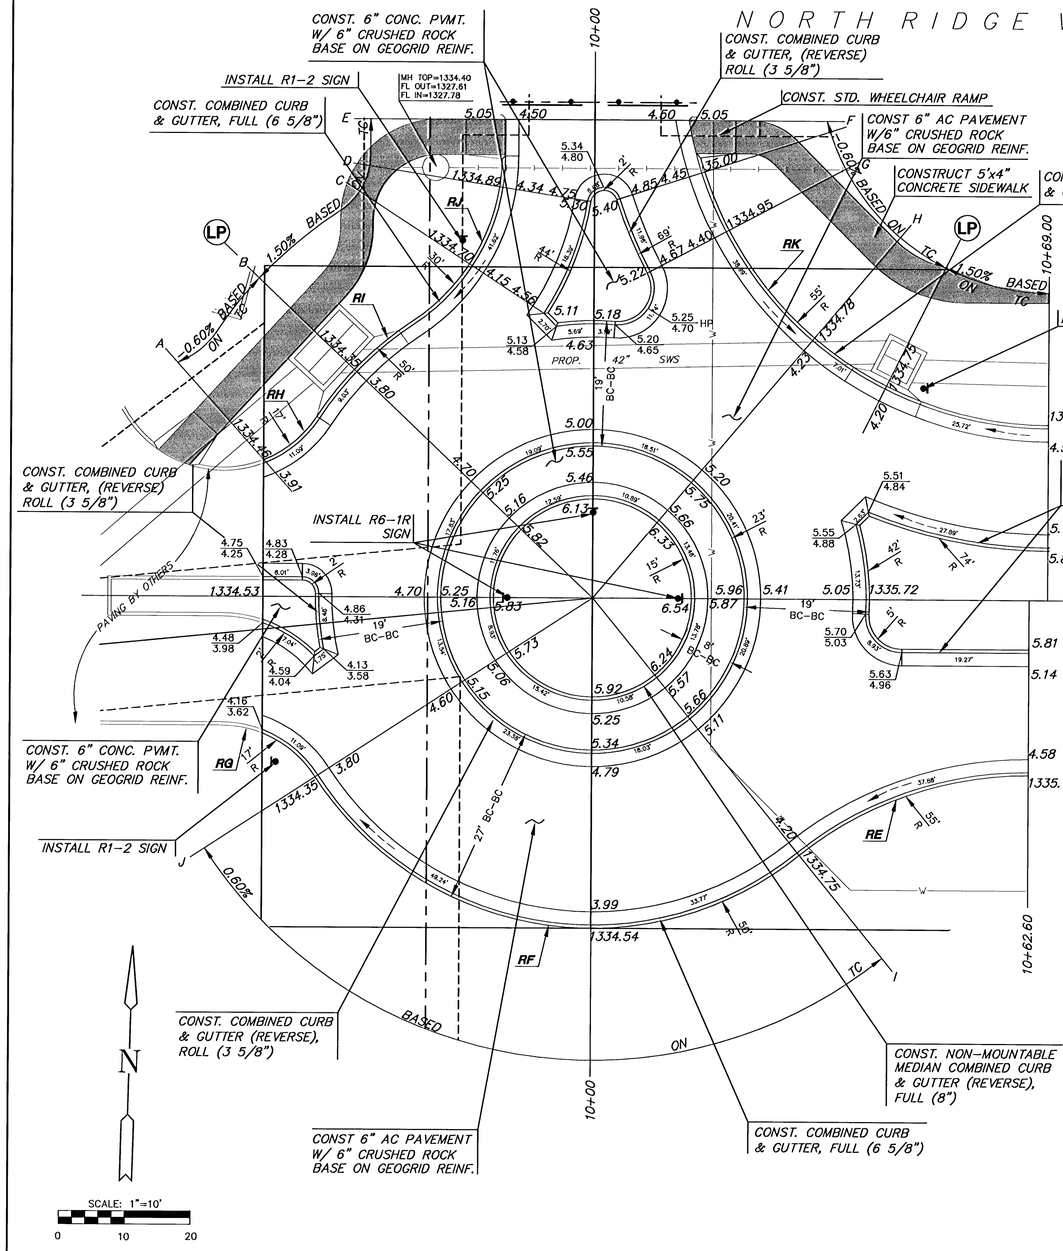

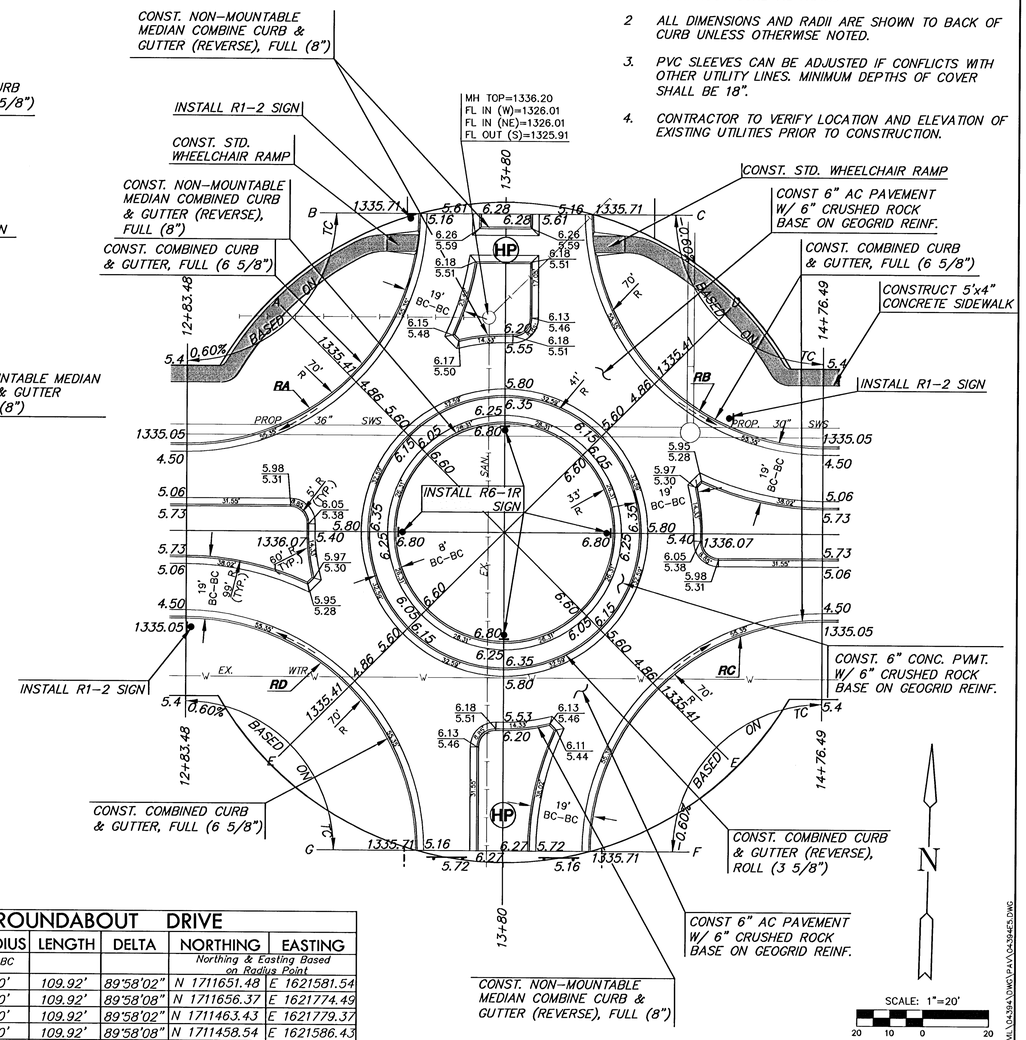

NOTE:

1. TOP OF CURB ELEVATIONS SHOWN ARE FOR FULL OR NON-MOUNTABLE CURB. THE TOP OF CURB ELEVATIONS FOR AREAS TO BE CONSTRUCTED AS ROLL-TYPE CURB ARE SHOWN FOR FULL CURB. CONSTRUCT CURB AS NOTED.
2. ALL DIMENSIONS AND RADII ARE SHOWN TO BACK OF CURB UNLESS OTHERWISE NOTED.
3. PVC SLEEVES CAN BE ADJUSTED IF CONFLICTS WITH OTHER UTILITY LINES. MINIMUM DEPTHS OF COVER SHALL BE 18".
4. CONTRACTOR TO VERIFY LOCATION AND ELEVATION OF EXISTING UTILITIES PRIOR TO CONSTRUCTION.

ROUNDABOUT DRIVE

ARC	RADIUS to BC	LENGTH	DELTA	NORTHING	EASTING
				Northing & Easting Based on Radius Point	
RA	70'	109.92'	89°58'02"	N 1711651.48	E 1621581.54
RB	70'	109.92'	89°58'08"	N 1711656.37	E 1621774.49
RC	70'	109.92'	89°58'02"	N 1711463.43	E 1621779.37
RD	70'	109.92'	89°58'08"	N 1711458.54	E 1621586.43
RE	55'	37.52'	39°05'13"	N 1711468.03	E 1621368.84
RF	50'	83.84'	96°04'39"	N 1711547.83	E 1621300.59
RG	17'	10.59'	35°40'42"	N 1711509.92	E 1621245.35
RH	17'	10.58'	35°39'42"	N 1711582.91	E 1621243.51
RI	50'	20.61'	23°36'52"	N 1711547.83	E 1621300.59
RJ	30'	29.65'	56°38'02"	N 1711613.51	E 1621254.91
RK	55'	77.19'	80°24'52"	N 1711631.05	E 1621367.51

MKEC ENGINEERING CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67206
316 - 684 - 9600

NORTH RIDGE VILLAGE ADDITION
PROJECT NAME

VILLAGE CIRCLE
SHEET TITLE

MAB	KWS	MAB/DFL
DESIGN BY:	DRAWN BY:	CHECKED BY:
JANUARY 2006	04394	13 / 34
DATE	JOB NO.	SHEET/OF

J:\CIVIL\04394\DWG\PLAN\04394ES.DWG