


Brass plate on the NE wingwall of Arkansas
River bridge & 63rd St. S.
Elev. = 1267.48 NGVD29 (per County record)

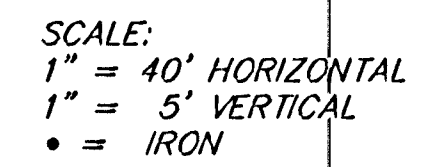

The Contractor shall be required to backfill trench with sand from Sta. 0+00 to Sta. 4+28.6, Line 4 and from Sta. 0+00 to Sta. 1+07.6, Line 4A excluding locations where Flowable Fill is called out. To be bid as "L.F. Sand Backfill Jetted and Vibrated"

NUMBER	TYPE	LOCATION			STATION/ DIRECTION	FOR INFORMATION ONLY	
		LOT NO.	BLOCK NO.	LINE NO.		APPROXIMATE LENGTH 4" PIPE	
						VERTICAL	HORIZONTAL
36	8" X 4" Tee Saddle	24	D	4	2+74/Lt.	7'0 14.5'	12'
37	8" X 4" Tee Saddle	23	D	4	3+64/Lt.	14.5'	12'

NOTE: Vertical Riser Pipe shall be extended to 2' minimum above ground water elevation and 4' maximum below proposed ground elevation.

