

PLAN	CHECKED	DATE

PROFILE	CHECKED	DATE

DSNR: MDK OPER: JAC SCALE: 1"=40.00
 Q: 2004 (04215)002(SS)P01 05-24-2005 03:38:31 pm

N-1,697,151.3756, E-1,688,459.8532
 Sta. 0+00.0
 Core existing concrete MH wall and
 install New 21" Pipe. Seal new 21"
 Pipe to MH with an approved
 waterstop gasket and non-shrink
 grout. Construct a minimum of
 3' Reinforced Concrete Encasement
 from MH wall. Reshape MH floor
 to provide smooth flow. This work
 shall be considered subsidiary
 to the price bid for pipe in place.

CAUTION !!!
 Exist. 8"
 Force Main


Remove and reset
 fence as required.

CAUTION !!!
 High Voltage Overhead
 Electric (Westar Energy)



N-1,697,276.3858, E-1,688,443.9157
 Sta. 1+26.0
 Construct MH 1
 Standard MH

N-1,697,271.5821, E-1,688,086.9811
 Sta. 4+83.0
 Construct MH 2
 Standard MH

N-1,697,266.7785, E-1,687,730.0534
 Sta. 8+40.0
 Construct MH 3
 Standard MH

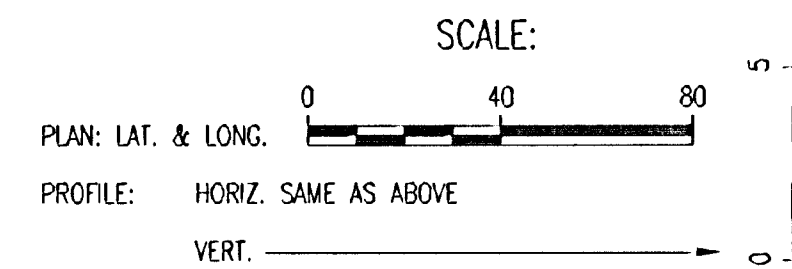


BE-11

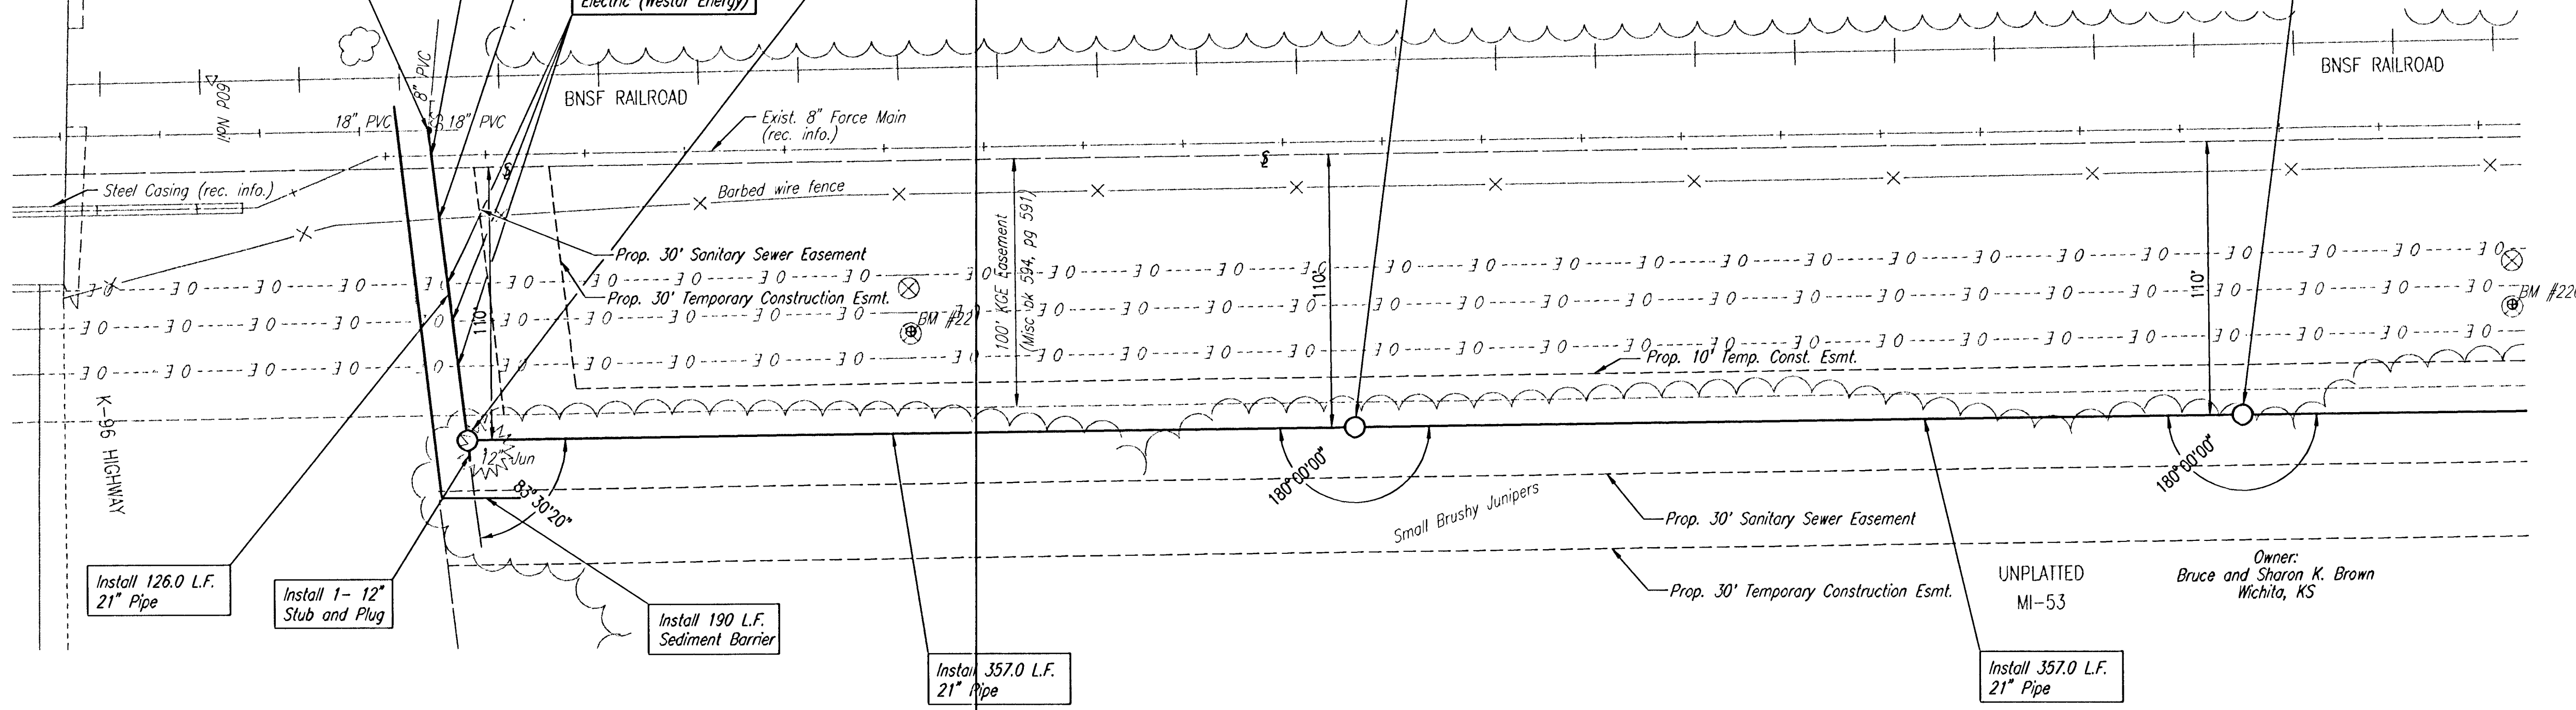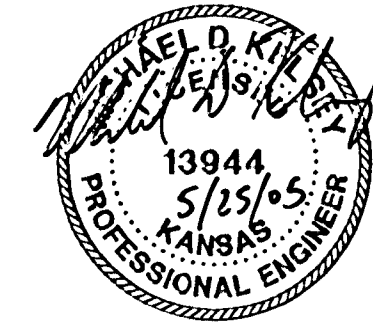

SANITARY SEWER LINE NO. 1

NOTE: REMOVE AND RESET FENCE AS REQUIRED. TRIM OR REMOVE TREES
 AS NECESSARY IN ACCORDANCE WITH GENERAL NOTE NO. 11.

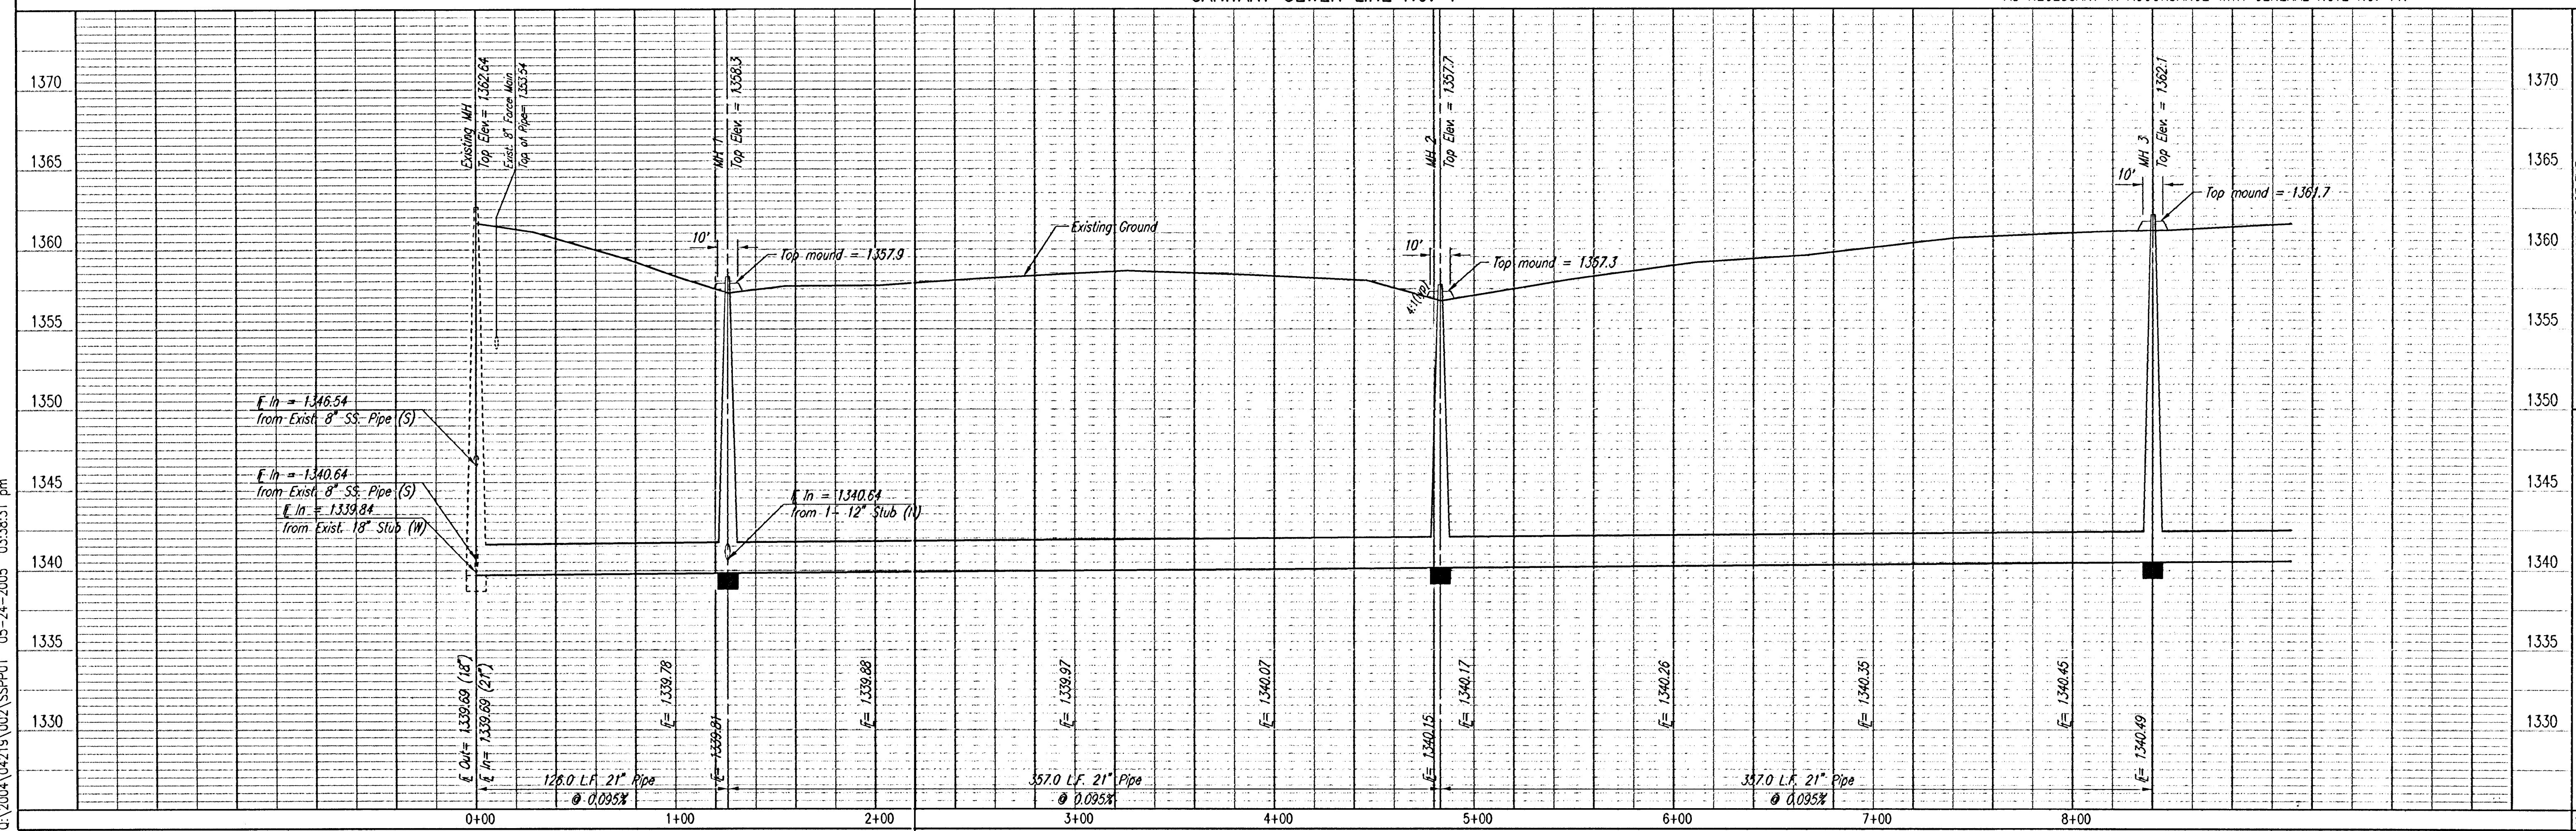

MAIN 16 OF THE
 FOUR MILE CREEK SEWER
 SANITARY SEWER LINE NO. 1

Professional Engineering Consultants, P.A.
 303 S. TOPEKA • WICHITA, KANSAS 67202
 316-262-2691 • FAX 316-262-3003

Designed By: MDK
 Drawn By: JCA, TRO
 Job No.: 35-04219-002
 Date: MAY 2004

JAMES L. ARMOUR, P.E. - CITY ENGINEER
 CITY OF WICHITA PROJECT NO. 468-8503

Sheet 4 of 26