WATER DISTRIBUTION SYSTEM

to serve

SKYWAY WEST 6TH ADDITION

CITY OF WICHITA, KANSAS

Paul Gunzelman, P.E. City Engineer

Project Number: 448-2023-007274

Org Code Number: 47121223

Munis Number: E3101

GENERAL NOTES:

1. Contractor will be required to provide notice to utility companies a minimum of seventy–two (72) hours prior to any excavation, as follows:

Kansas One–Call	687–2470

   The Contractor must notify the following in case of an emergency:

Cox Communications	262–4270
Kansas Gas Service	1–888–482–4950
Evergy	383–8650
AT&T	268–2245
City of Wichita Water Dept.	268–4563
City of Wichita Sewer Maint.	268–4024
City of Wichita Storm Sewer Maint.	268–4090
City of Wichita Traffic Maint.	268–4034

2. Maintain a minimum of 10–foot horizontal separation between all water lines (mains, services, and fire hydrants) and all sanitary sewer lines (mains, services, and manholes). All separation distances are to be measured from edge–to–edge, at the closest point.

3. Maintain a minimum of 2–foot vertical separation between all water lines (mains and services) and all gravity sanitary sewer lines (mains, services, and manholes) at crossings. All separation distances are to be measured from edge–to–edge, at the closest point.

4. Maintain a minimum of 2–foot vertical separation between all water lines (mains and services) and all pressurized sanitary sewer lines (force mains and services) at crossings. Waterlines must always be placed above pressurized sanitary sewer lines where they cross. All separation distances are to be measured from edge–to–edge, at the closest point.

5. Utility service lines, poles, valve boxes, meters, and etcetera are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right–of–way which do not conflict with proposed construction.

6. Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.

7. Trees and shrubs in public right–of–way which are in direct conflict with proposed new construction shall be removed by the Contractor with the Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.

8. The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days notice prior to start of construction.

9. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re–establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re–established by a licensed land surveyor in accordance with state laws.

10. All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on–site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on–site engineer until project is accepted by City of Wichita. Maintenance and/or replacement of erosion control measures to be paid by L.S. bid item "Maintain Existing BMP's."

11. The Contractor shall adjust water valve boxes and fire hydrants as directed by the Engineer at the price bid for said adjustments. The Water Department shall field locate water valves one time during construction when requested by Contractor. It shall be the Contractor's responsibility to preserve such field locations during the construction process. Water valves, water valve boxes or fire hydrants damaged during construction shall be repaired by the Contractor at his own expense.

12. All disturbed areas are to be seeded as follows:

    SEED –– Rye grass (PLS)––5 lbs./1000 Sq. Ft.

    All costs associated with seeding including mobilization, preparation of ground, seeding, fertilizing, mulching, etc. shall be included in the L.S. bid item "Seeding, Temporary".

13. All construction shall be completed following current City Standard Specifications and Special Provisions.

14. All excess excavation shall remain on–site and shall be stockpiled or spread at a location determined by the engineer.

15. Opening and closing of water valves shall be done slowly to prevent damage to the water distributions system from water hammer. All valves closed by the contractor must be reopened as new construction permits. Project inspector must ascertain that any valve closed by the Contractor is reopened. Contractor will be permitted to operate water valves only when the project inspector assigned to the project is present.

16. The Developer for this project is Travis Whisler.
    Address: 8918 W 21st Street Suite 200 #201,
    Wichita, KS 67205
    PH# (316) 371–4499
    Email: twcustomhomes@gmail.com

BENCHMARKS

BENCHMARK #1:
CROSS CUT IN SQUARE CUT, TOP OF CURB AT WEST END OF CURB RETURN, NORTHWEST CORNER OF SHEFFORD AND W 35TH ST S, 14.5' SOUTH & 5.0' WEST OF THE SOUTHEAST CORNER OF LOT 1, BLOCK D, HARVEST RIDGE ADDITION.
ELEV. = 1336.39 (NAVD88)

BENCHMARK #2:
CROSS CUT IN SQUARE CUT ON TOP FRONT CENTER OF CATCH BASIN, WEST SIDE OF HOLLYWOOD, 4.6' NORTH & 12.8' EAST OF SOUTHEAST CORNER OF LOT 2, BLOCK C, HARVEST RIDGE ADDITION.
ELEVATION = 1335.39 (NAVD88)

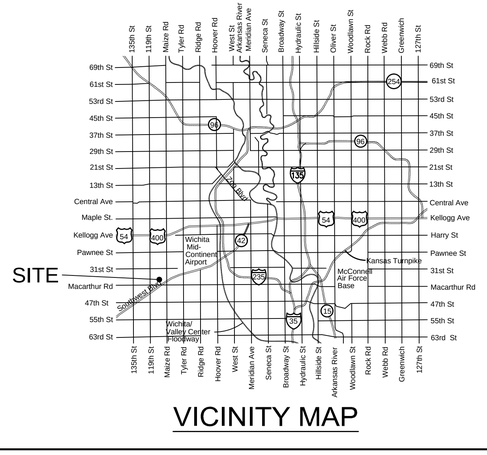

VICINITY MAP

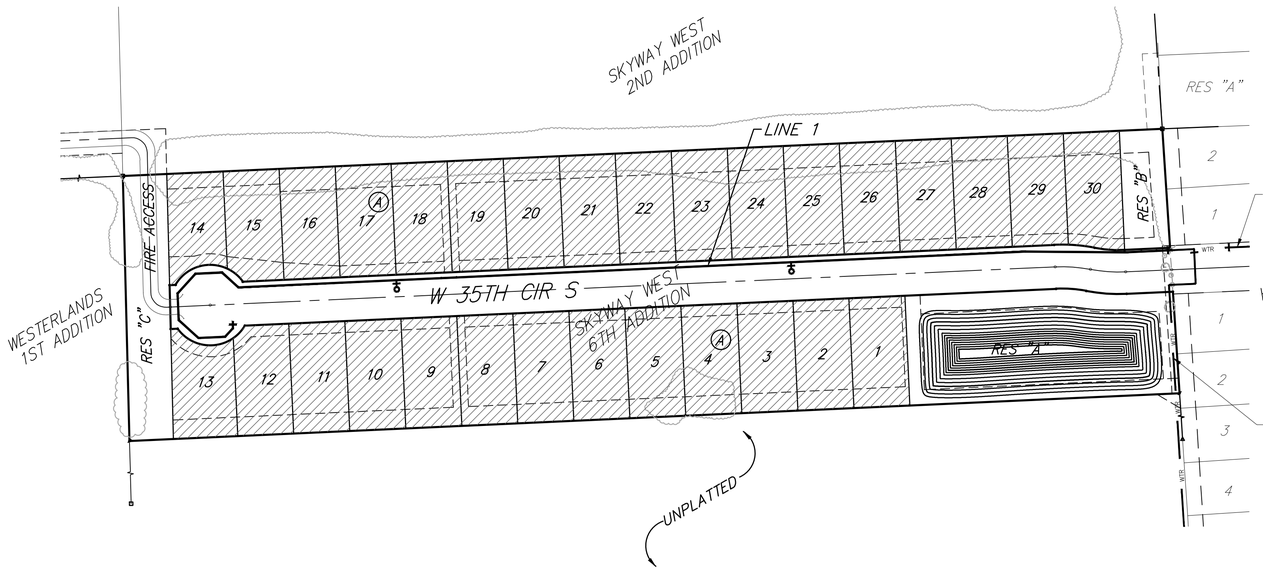

0 100 200

Scale: 1" = 100'

· = Iron

SHEET INDEX

Title Sheet	1
Standard Water Details	2
Water Service Details	3
Line 1	4–6
Erosion Control Plan	7
Erosion Control Details	8–12
Coordinate Sheet	13
Copy of Plat	14

BENEFIT DISTRICT

REVISION: Removed Permanent Seeding Date: 1/3/24 By: CDW

CASE DUSTIN WARNER LICENSED 29833 01/03/2024 KANSAS PROFESSIONAL ENGINEER

January 3, 2024

BAUGHMAN COMPANY
315 Ellis St. Wichita, KS 67211 316-262-7271
BaughmanCo.com

E:\Projects\Skyway West 6th 22-05-P7986\Engineering\Phase 1\WTR\WTR.dwg