


CURVE TABLE					
$\Delta = 59^{\circ}46'42''$ $R = 150.00'$ $T = 86.22'$ $L = 156.50'$ $LC = 149.50'$					
CURVE DATA BASED ON CENTERLINE $\Delta/2 = 29^{\circ}53'21''$					
STATION	ARC	8'off Ltcb	8'off Rtcb	DEFLECTION	TOTAL DEFLECTION
2+50.29	—	—	—	00'00'00"	00'00'00"
2+75.00	24.71'	28.30'	21.06'	04'43'09"	04'43'09"
2+89.31	14.31'	16.40'	12.21'	02'43'59"	07'27'08"
3+00.00	10.69'	12.26'	9.12'	02'02'30"	09'29'38"
3+17.19	17.19'	—	14.66'	03'16'59"	12'46'37"
3+25.00	7.81'	8.95'	6.66'	01'29'30"	14'16'07"
3+45.07	20.07'	23.00'	17.11'	03'49'59"	18'06'06"
3+50.00	4.93'	5.65'	4.21'	00'56'30"	19'02'36"
3+75.00	25.00'	28.63'	21.31'	04'46'29"	23'49'04"
4+00.00	25.00'	28.63'	21.31'	04'46'29"	28'35'33"
4+06.79	6.79'	7.78'	5.79'	01'17'48"	29'53'21"
Def/Ft = 11.45916 Min.					

CURVE TABLE					
$\Delta = 13^{\circ}02'22''$ $R = 300.00'$ $T = 34.29'$ $L = 68.27'$ $LC = 68.13'$					
CURVE DATA BASED ON CENTERLINE $\Delta/2 = 06^{\circ}31'11''$					
STATION	ARC	8'off Ltcb	8'off Rtcb	DEFLECTION	TOTAL DEFLECTION
10+36.38	—	—	—	00'00'00"	00'00'00"
10+50.00	13.62'	14.62'	12.62'	01'18'02"	01'18'02"
10+75.00	25.00'	26.83'	23.16'	02'23'14"	03'41'17"
11+00.00	25.00'	26.83'	23.16'	02'23'14"	06'04'31"
11+04.65	4.65'	5.00'	4.31'	00'26'40"	06'31'11"
Def/Ft = 5.72958 Min.					

FOX RIDGE
ADDITION

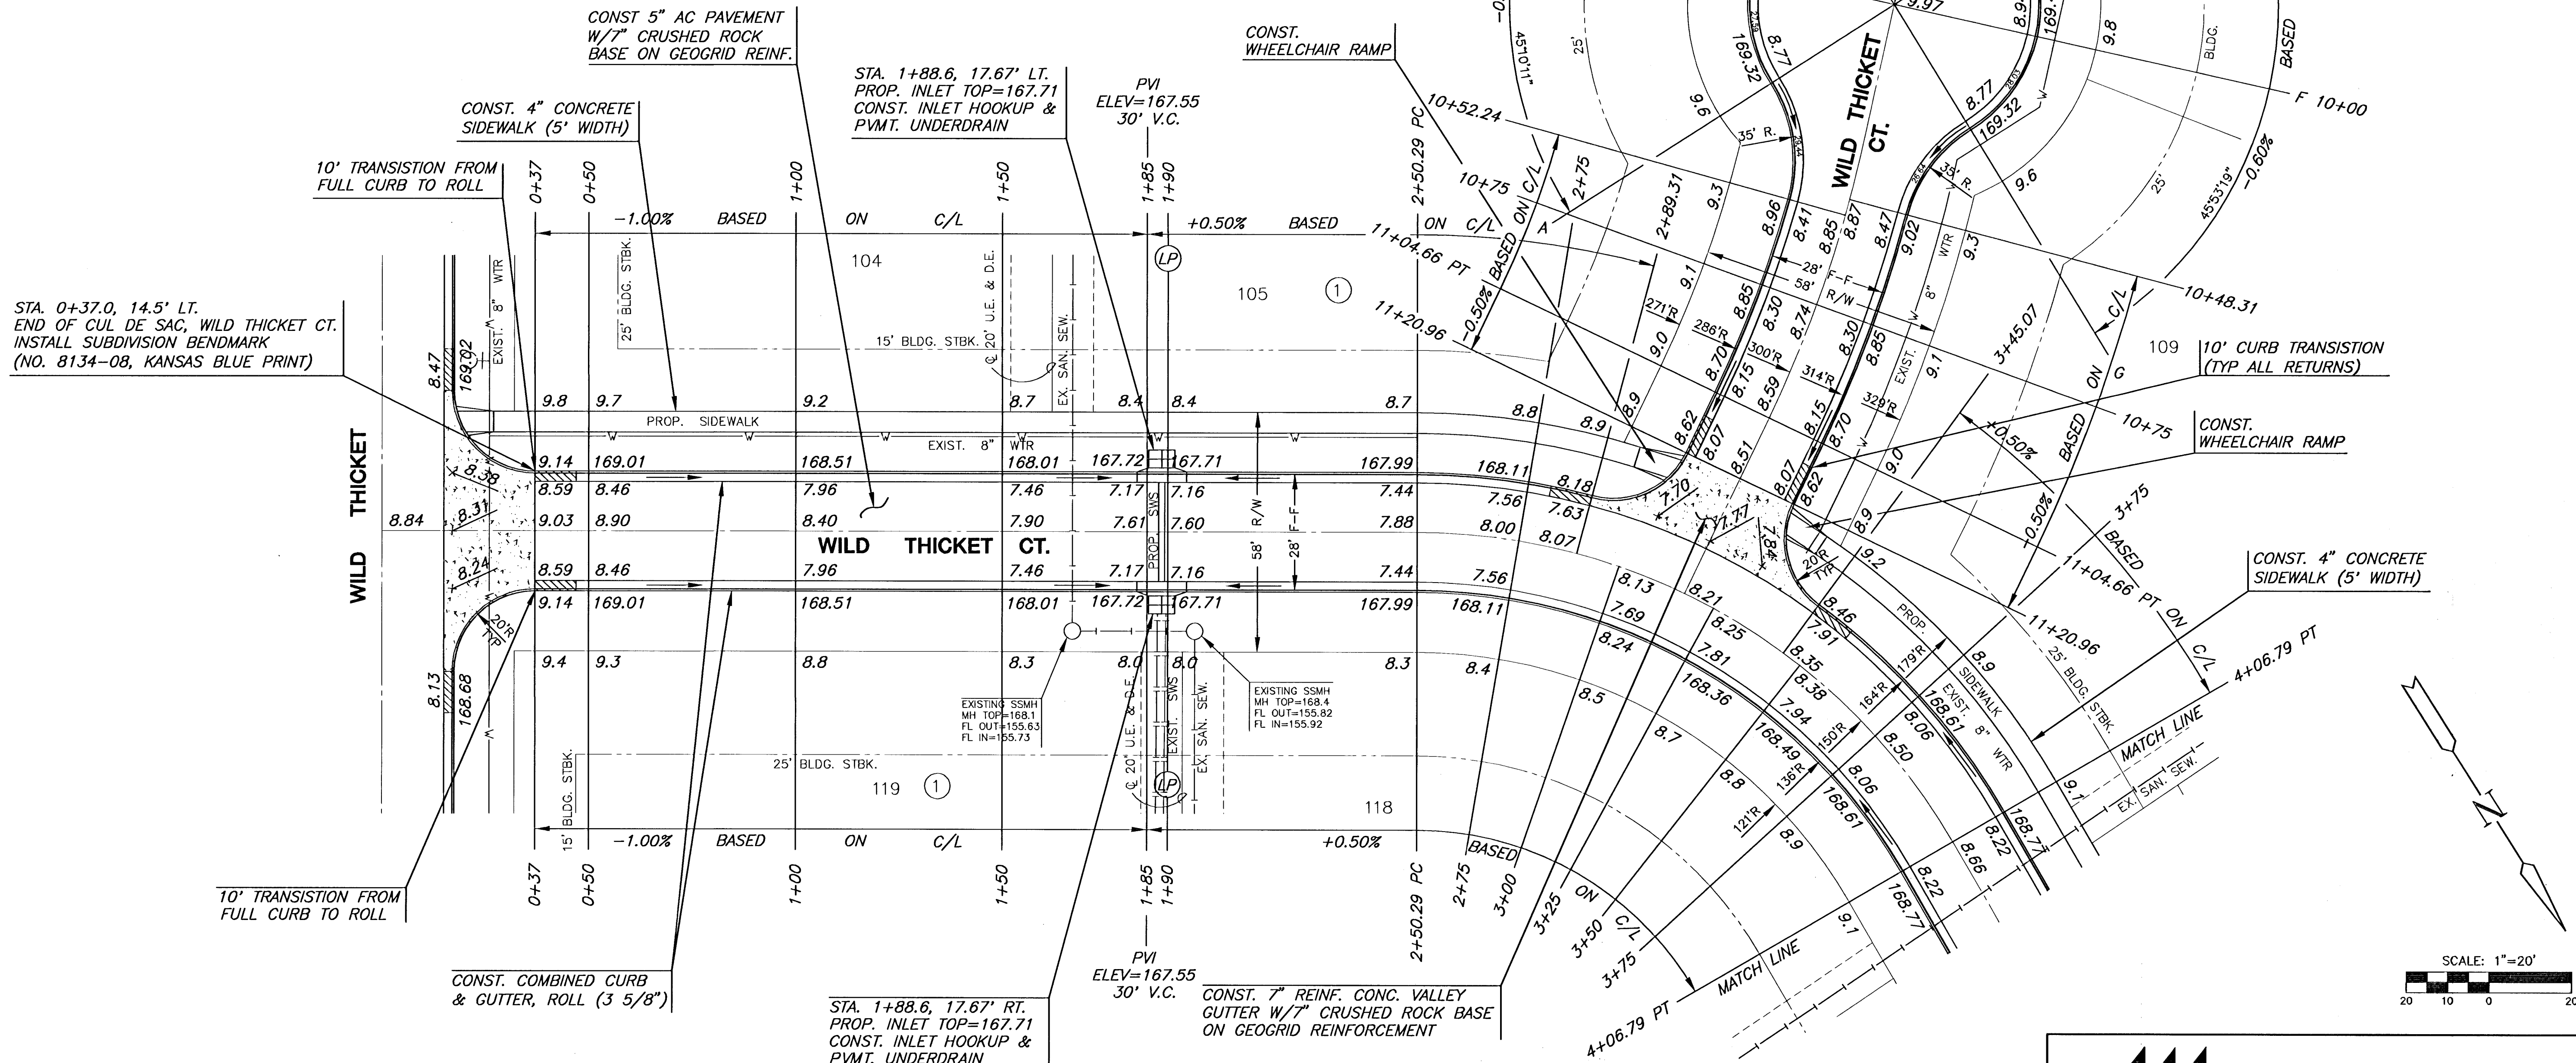

LEGEND

—+— STREET SIGN & SIGN LOCATION
(SEE SIGN ASSEMBLY TABLE
FOR TYPE & STATION OF SIGN)

NOTE:
TOP OF CURB ELEVATIONS SHOWN
ARE FOR FULL CURB. CONSTRUCT
CURB AND GUTTER AS NOTED.

FOX RIDGE
ADDITION



FOX RIDGE ADDITION - PHASE 13 - PART 2

PROJECT NAME

WILD THICKET COURT PAVING


SHEET TITLE

DFL MKrk GJA

DESIGN BY: DRAWN BY: CHECKED BY:

OCTOBER 2005 99118 8 / 29

DATE JOB NO. SHEET/OF

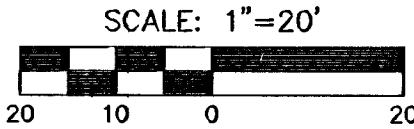

G:\CV\1\99118.DWG\PAV\PH13 PART2\99118E2.DWG