Maintain 330 L.F. silt fence per detail, sheet 14.

Maintain hay bale barrier per detail, sheet 14.

Maintain existing ditch to ensure positive drainage of sump areas.

Maintain hay bale barrier per detail, sheet 14.

Maintain hay bale barrier per detail, sheet 14.

MAINSGATE CIR.

MAINSGATE

SPRING HOLLOW ST.

CAMDEN CHASE CT.

CAMDEN CHASE

AYESBURY

CASTLE ROCK

24TH ST. N.

24TH CT. N.

QUINCY CIR.

Maintain hay bale barrier per detail, sheet 14.

Maintain hay bale barrier per detail, sheet 14.

Maintain existing ditch to ensure positive drainage of sump areas.

Maintain sediment barrier per detail, sheet 16.

RES. "B"

Prop WSE = 1783

Scale: 1" = 60'

All easements have been graded prior to construction with phase 1 mass grading plan. However, all easements shown as hatched on this sheet shall be fine graded with this project after sanitary sewer construction has been completed. All cost associated with the fine grading shall be included in the lump sum bid item "Easement Grading".

NOTE: Contractor shall remove & replace existing erosion control measures as necessary for construction. Contractor shall be required to maintain all on-site erosion control items until final acceptance by the City of Wichita. Costs shall be incidental to site clearing and restoration.


Install one construction entrance onto existing paved roadway per detail, sheet 16.

Area to be graded

Proposed Grades

The contractor shall fill and grade the easements as shown to the elevations given on the easement grading plan. All costs for grading shall be incidental to the Easement Grading Bid Item.

The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation. The existing ditch cross sections are shown below.

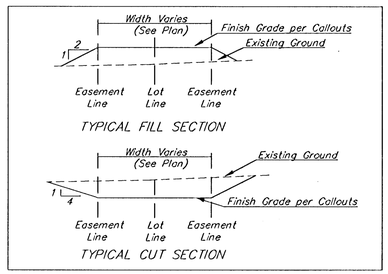

Baughman

KRUG NORTH 2ND ADD. - PH. III

ESMT. GRADING & EROSION CONTROL PLAN

Baughman Company, P.A. 315 Ella St. Wichita, KS 67211 P 316.262.7271 F 316.262.0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER	DESIGN AJD	DRAWN TMS
REVISIONS:	APPROVED	DATE 10/05
	SCALE Noted	
	SHEET 13 OF 18	

KrugNorth2nd\Phase111\SSECplan