

PLAN	CHECKED	BY	DATE
	CHECKED		

PROFILE	CHECKED	BY	DATE
	CHECKED		

DSNR: OPER. ILS SCALE: 1"=40.00
 Q:\2004\04456\000\sspp02 11-29-2004 04:08:07 pm

N-51,703.7634, E-49,913.6337
 Sta. 0+00.00*
 Core existing concrete MH wall and
 install outside drop connection.
 Seal new 8" pipes to MH with approved
 waterstop gasket and non-shrink
 grout. Construct a minimum of
 3' Reinforced Concrete Encasement
 from MH wall. Reshape MH floor
 to provide smooth flow. This work
 shall be considered subsidiary
 to the price bid for pipe in place.

Install 49.1 L.F.
 8" Pipe

N-51,750.9540, E-49,900.1320
 Sta. 0+49.1
 Construct MH 5
 Standard MH

N-51,750.2503, E-49,712.6613
 Sta. 2+36.5
 Construct MH 6
 Standard MH

Install 187.4 L.F.
 8" Pipe



SCALE:
 0 40 80
 PLAN: LAT. & LONG.
 PROFILE: HORIZ. SAME AS ABOVE
 VERT. 0 5

* PRIOR TO BEGINNING CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE THE EXISTING 8" PVC PIPE AT SANITARY SEWER STATION 0+00.00 TO VERIFY ITS HORIZONTAL AND VERTICAL LOCATION. THE PIPE LOCATION SHALL BE REPORTED TO THE ENGINEER SO THAT ANY NECESSARY PLAN MODIFICATIONS CAN BE MADE. ANY ADDITIONAL LABOR OR MATERIALS NECESSARY TO COMPLETE THE CONNECTION SHALL BE CONSIDERED SUBSIDIARY TO THE PROJECT.

SANITARY SEWER LINE NO. 3

FOR PLAT COORDINATES
 SEE SHEET NO. 3

①
 ②
 DENOTES SEWER SERVICE.
 SEE SHEET NO. 7 FOR SEWER
 SERVICE SCHEDULE AND DETAILS

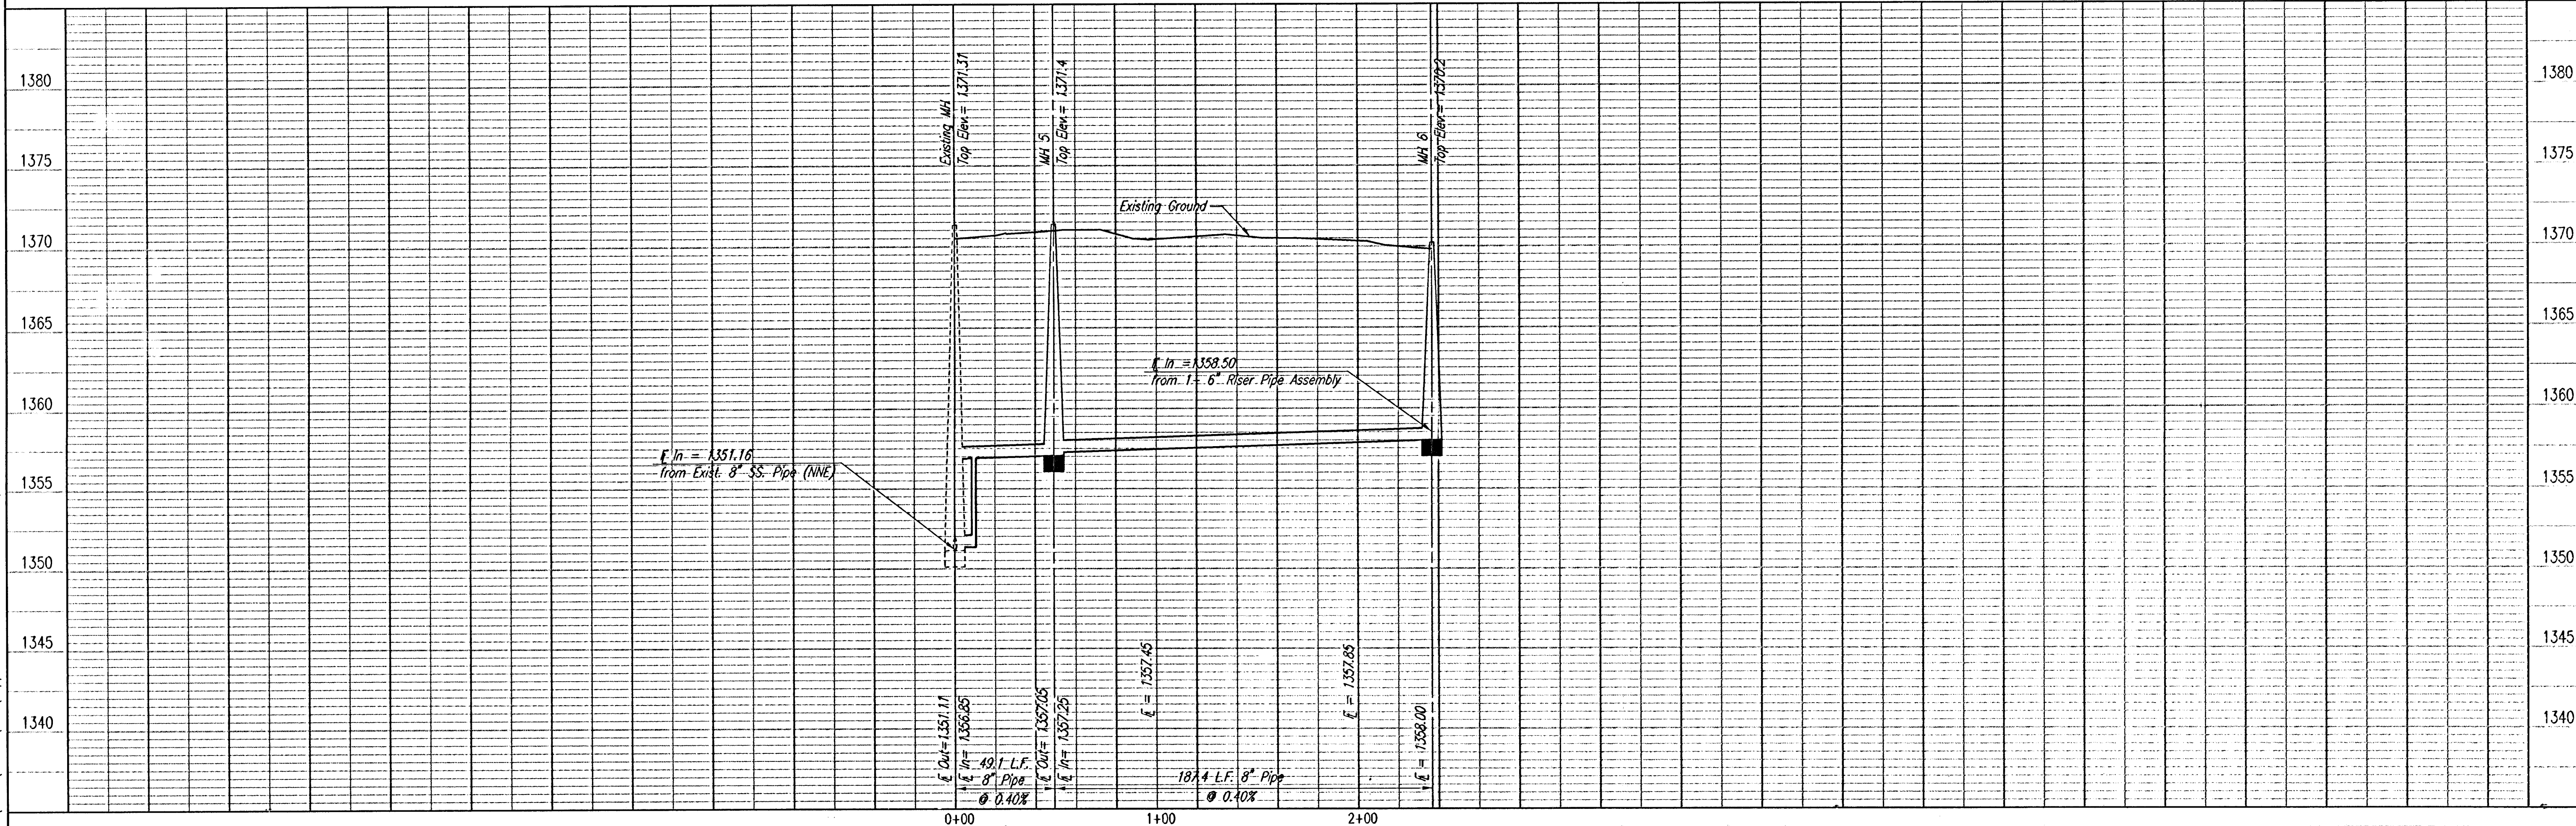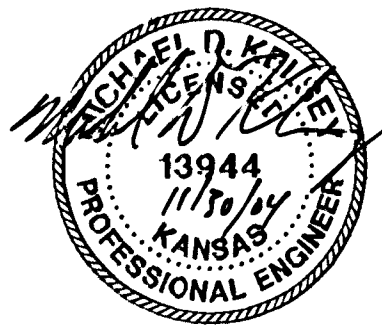

LATERAL 6 MAIN 26 OF THE
 WAR INDUSTRIES SEWER

SANITARY SEWER LINE NO. 3

Professional Engineering Consultants, P.A.
 303 S. TOPEKA • WICHITA, KANSAS 67202
 316-262-2691 • FAX 316-262-3003

Designed By: MDK/ALA
 Drawn By: TLS

Job No.: 35-04456-0-042
 Date: August, 2004

JAMES L. ARKUS, P.E. - ACTING CITY ENGINEER
 CITY OF WICHITA, PROJECT NO. 648-8385

Sheet 5 of 13