


# RIVERSIDE PARK SYSTEM

## Central Riverside Park

Wichita, Kansas

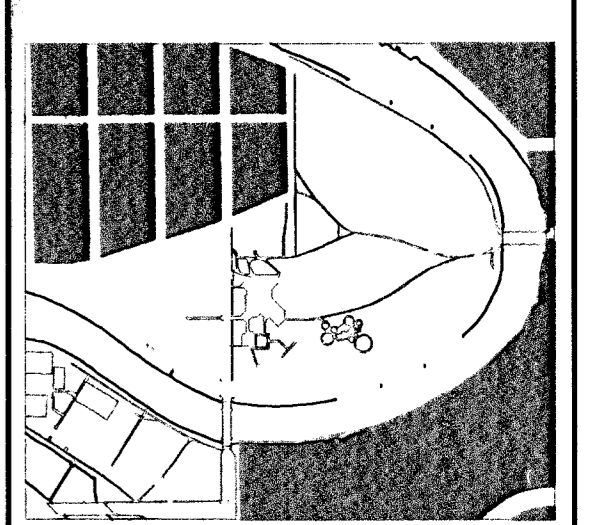


CENTRAL RIVERSIDE PARK

PRINTS ISSUED  
07NOV2002

WORK No. 00113  
drawn: STAFF  
checked: STAFF

MURDOCK STREET ROUNDABOUT  
MARKING & SIGNING PLAN

SECTION TWO  
10 of 28

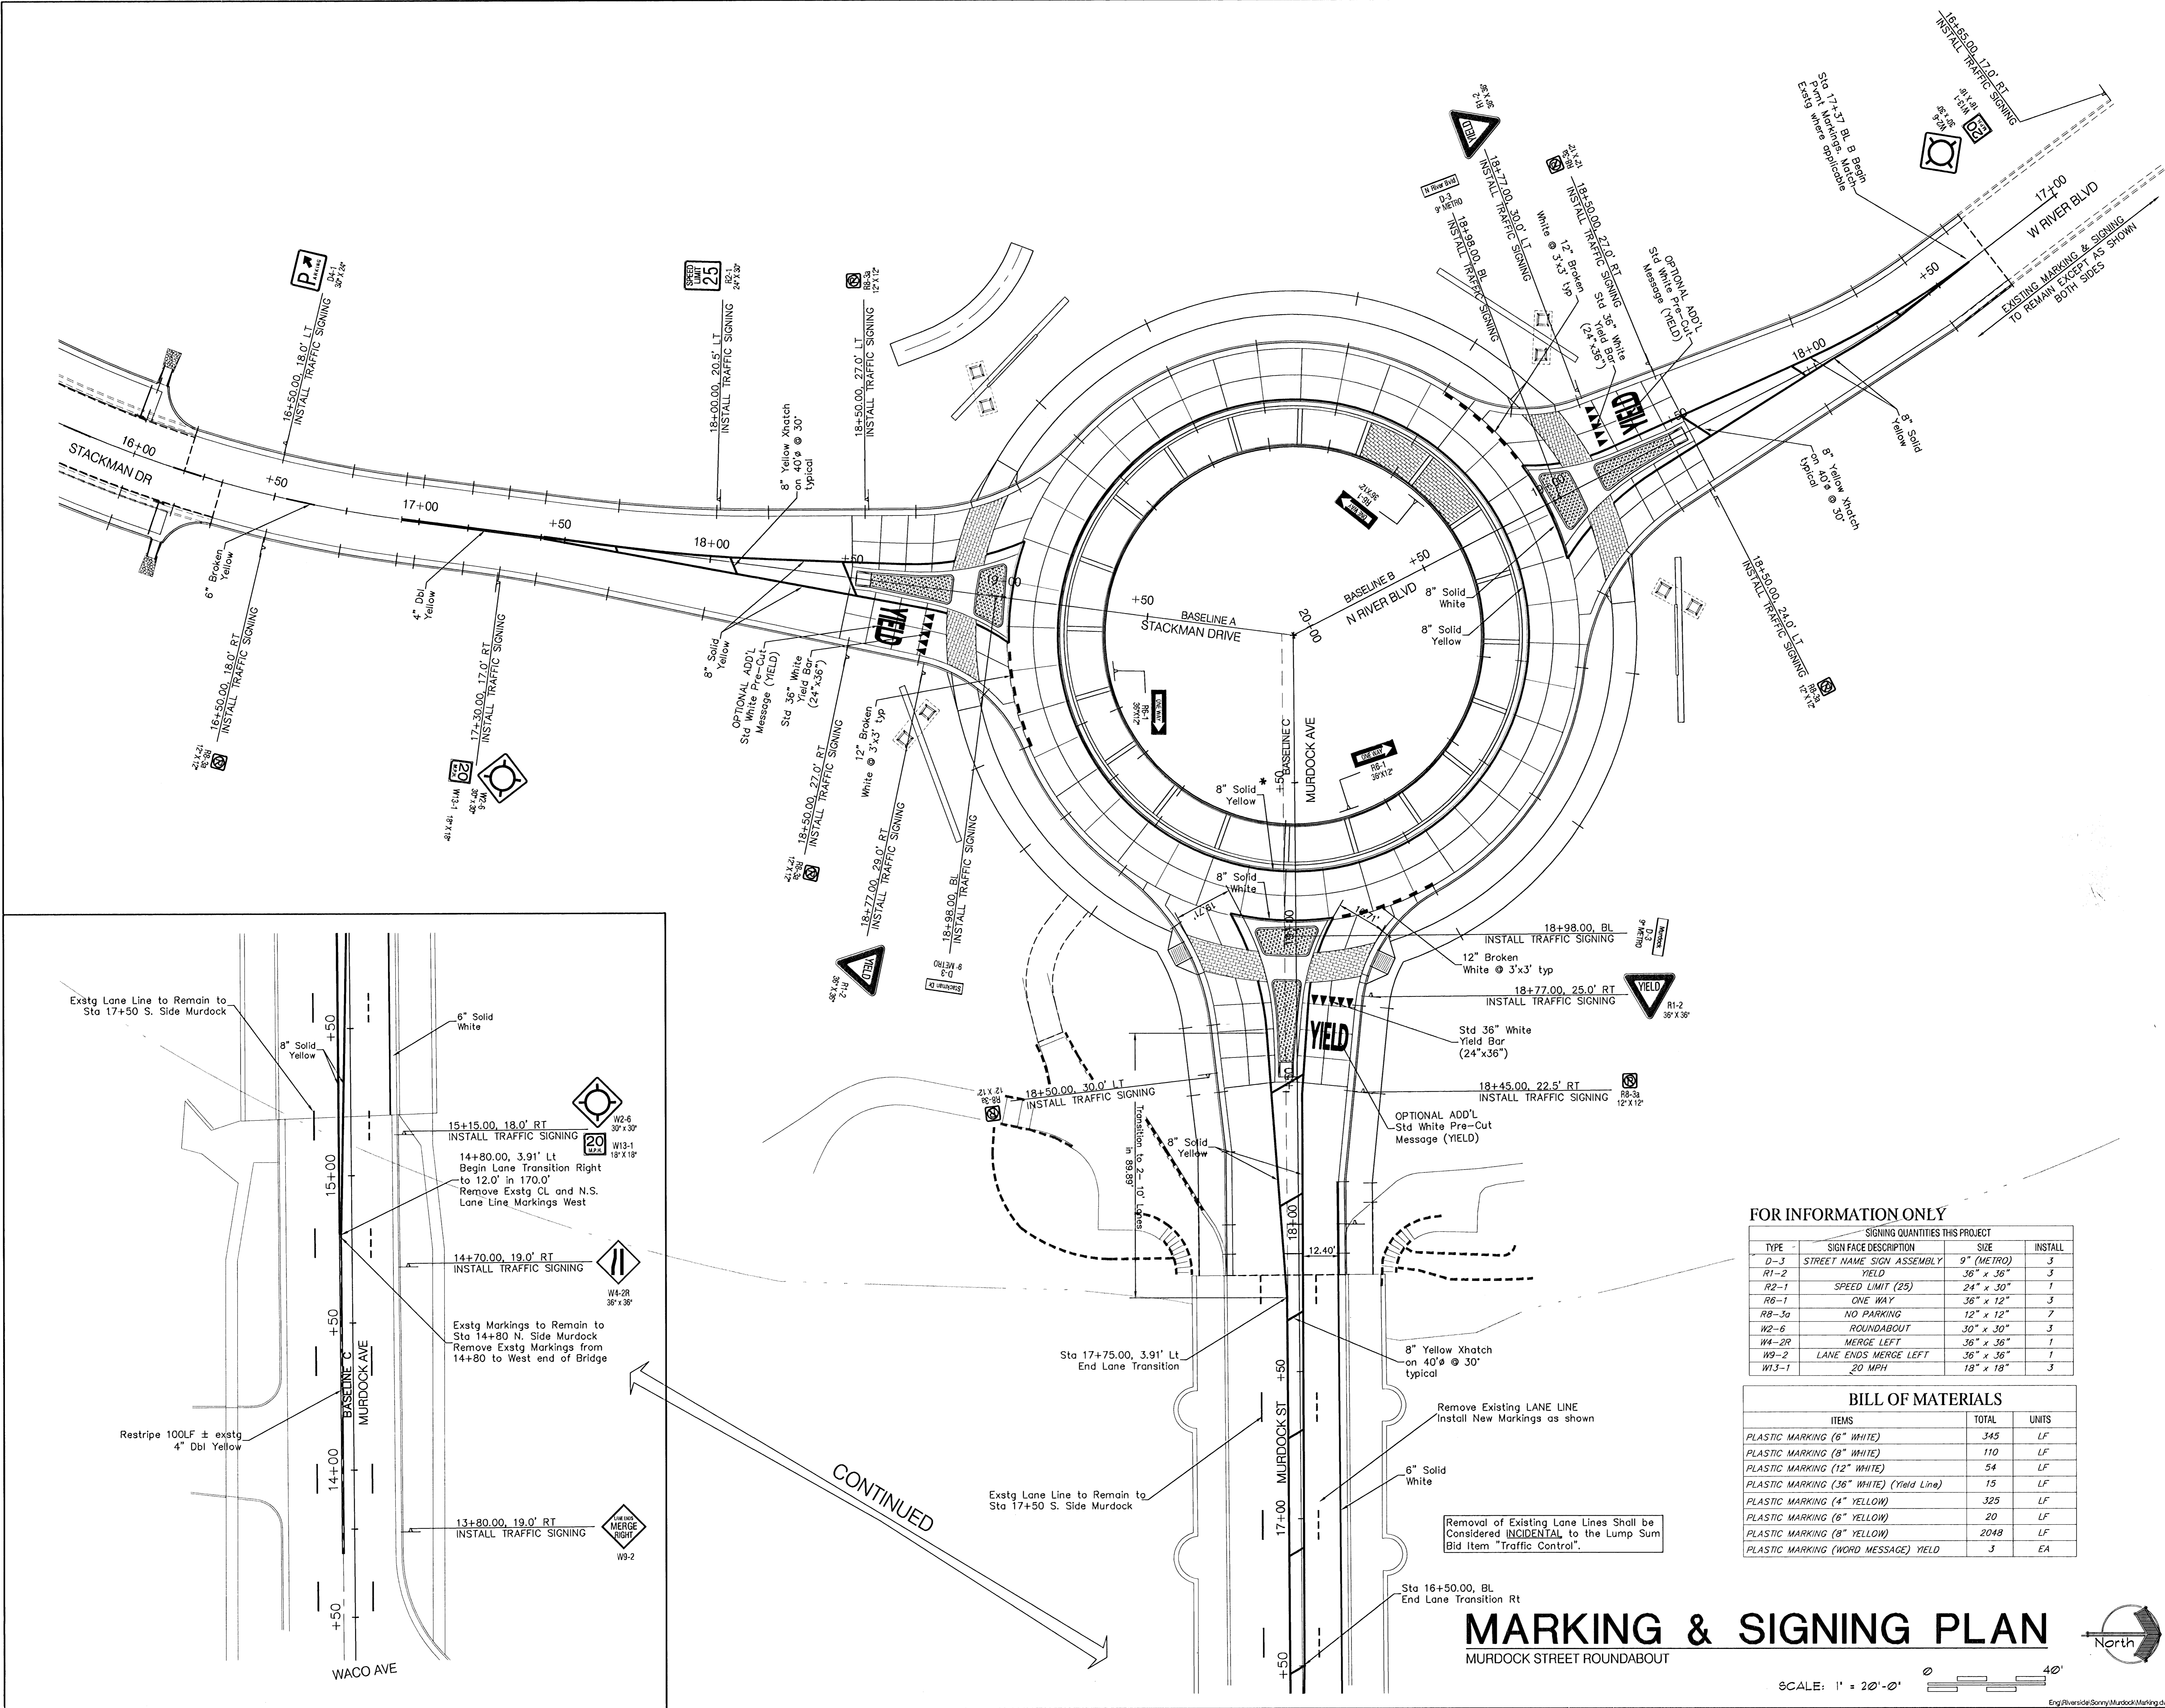

**FOR INFORMATION ONLY**

SIGNING QUANTITIES THIS PROJECT

TYPE	SIGN FACE DESCRIPTION	SIZE	INSTALL
D-3	STREET NAME SIGN ASSEMBLY	9" (METRO)	3
R1-2	YIELD	36" x 36"	3
R2-1	SPEED LIMIT (25)	24" x 30"	1
R6-1	ONE WAY	36" x 12"	3
R8-3a	NO PARKING	12" x 12"	7
W2-6	ROUNDABOUT	30" x 30"	3
W4-2R	MERGE LEFT	36" x 36"	1
W9-2	LANE ENDS MERGE LEFT	36" x 36"	1
W13-1	20 MPH	18" x 18"	3

**BILL OF MATERIALS**

ITEMS	TOTAL	UNITS
PLASTIC MARKING (6" WHITE)	345	LF
PLASTIC MARKING (8" WHITE)	110	LF
PLASTIC MARKING (12" WHITE)	54	LF
PLASTIC MARKING (36" WHITE) (Yield Line)	15	LF
PLASTIC MARKING (4" YELLOW)	325	LF
PLASTIC MARKING (8" YELLOW)	20	LF
PLASTIC MARKING (8" YELLOW)	2048	LF
PLASTIC MARKING (WORD MESSAGE) YIELD	3	EA

Removal of Existing Lane Lines Shall be Considered INCIDENTAL to the Lump Sum Bid Item "Traffic Control".

# MARKING & SIGNING PLAN

MURDOCK STREET ROUNDABOUT

SCALE: 1" = 20'-0"

