

@ S. Bd. Sta. 57+06.3 to 57+92.1, Rt.  
Install (2) 4" Schedule 40 PVC Pipe  
Sleeves. #

@ S. Bd. Sta. 59+17.8, 27.0' Lt.  
Install Traffic Signs  
(R4-7)(Keep Rt.)  
(OM1-3)(Object Marker)  
See Sheet No. 50.

@ S. Bd. Sta. 58+37.37 Install  
Flat Survey Marker No.  
8134-08 3" Top Diameter  
Bench Mark Disc

@ S. Bd. Sta. 58+75, 1.5' Lt. to 20.5' Rt.  
Install (2) 4" Schedule 40 PVC Pipe  
Sleeves. #

@ S. Bd. Sta. 59+20, 5.0' Lt.  
Install Street Name Sign  
(21st St/Chateau Parkway)  
See Sheet No. 50.

Const. Std. Type 1A  
Inlet Hookup  
See Sheet No. 32.

@ N. Bd. Sta. 58+55, 26.5' Lt. to 1.5' Rt.  
Install (2) 4" Schedule 40 PVC Pipe  
Sleeves. #


@ N. Bd. Sta. 59+10, 5.0' Rt.  
Install Traffic Sign  
(R1-1)(Stop)  
See Sheet No. 50.

\* Sleeves to be 42" below top of curb.  
Each end of 4" PVC pipe sleeves shall be capped  
and marked with steel "1" posts or 2" dia.  
steel pipe a maximum of 12" above finished  
grade. Pipe, caps, markers, and installation  
thereof shall be Subsidiary to Median Comb. Curb  
& Gutter (6 5/8").

All work shown north of N.Bd. Sta. 58+94.61 and S.Bd. Sta. 59+15.81 is contingent on the status of City of Wichita Project No. 472-84206, "21st St. N. Decel Lanes", which is scheduled for construction concurrently with this project. The bid item "Temporary Surfacing (Pavt. Hookup)" shall be full payment for all work necessary in this zone to provide a temporary pavement connection, including all excavation, compaction, clearing, combined curb and gutter removal, asphalt paving, incidental traffic control, and all other labor, equipment, and materials necessary to complete the work.

If, in the opinion of the Engineer, the work included in this zone is not necessary due to adjacent construction on the decel lane project, this bid item shall be 100% underrun.

DSMR: BLB OPER: BUS SCALE: 1"=20.00  
C:\2004\04688\000\04688-000-C-SITR56-60 08-24-2005 12:31:47 am

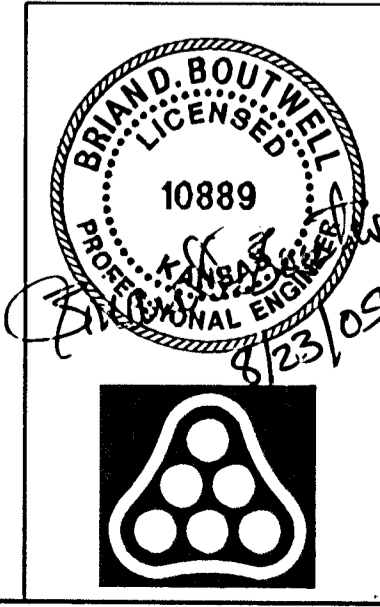

No.	Revision	By	Date
	OAK CREEK - PHASE 1		
<b>CHATEAU PARKWAY</b>			
@ N. Bd. STA. 56+50 TO 58+94.61 @ S. Bd. STA. 57+00 TO 59+15.81 JAMES L. ARNOUR, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84209			
<b>Professional Engineering Consultants, P.A.</b> 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
Designed by	BDB, BLB	Job No.	35-04688-000
Drawn by	BUS	Date	October 2004
			Sheet 12 of 86