


Segment 1				
Station	Cut(S.F.)	Fill(S.F.)	Cut(C.Y.)	Fill(C.Y.)
3+07.93	47.90		5.32	
3+50.00	57.42	0.22	6.38	0.02
3+64.95	60.68	0.51	6.74	0.06
4+00.00	62.26	1.96	6.92	0.22
4+61.09	126.73	2.26	14.08	0.25
5+00.00	121.97		13.55	
5+50.00	145.53		16.17	
6+00.00	177.14		19.68	
6+11.52	174.87		19.43	
6+50.00	171.82		19.09	
7+00.00	180.67		20.07	
7+25.78	181.04		20.12	
7+50.00	182.54		20.28	
8+00.00	171.77		19.09	
8+50.00	160.93		17.88	
8+68.53	153.46		17.05	
9+00.00	141.56		15.73	
9+33.60	112.36		12.48	
Total			270.06	0.55

Segment 2				
Station	Cut(S.F.)	Fill(S.F.)	Cut(C.Y.)	Fill(C.Y.)
10+32.23	41.06		4.56	
10+50.00	79.81		8.87	
11+00.00	137.54		15.28	
11+50.00	148.17		16.46	
12+00.00	160.07		17.79	
12+50.00	169.51		18.83	
13+00.00	184.78		20.53	
13+50.00	146.96		16.33	
13+59.56	127.78		14.20	
13+84.46	70.48		7.83	
14+00.00	100.10		11.12	
14+08.90	135.08		15.01	
14+50.00	178.76		19.86	
15+00.00	173.18		19.24	
15+50.00	133.34		14.82	
16+00.00	150.11		16.68	
16+50.00	158.90		17.66	
16+87.49	34.97	2.77	3.89	0.31
Total			258.96	0.31

Cottonwood Lane				
Station	Cut(S.F.)	Fill(S.F.)	Cut(C.Y.)	Fill(C.Y.)
0+00.00				
0+30.97	68.18	0.95	7.58	0.11
0+40.63	79.16		8.80	
0+44.93	81.04		9.00	
0+50.00	55.86	2.22	6.21	0.25
0+75.00	27.92	0.12	3.10	0.01
0+80.58	32.46		3.61	
1+00.00	31.07		3.45	
Total			41.75	0.37

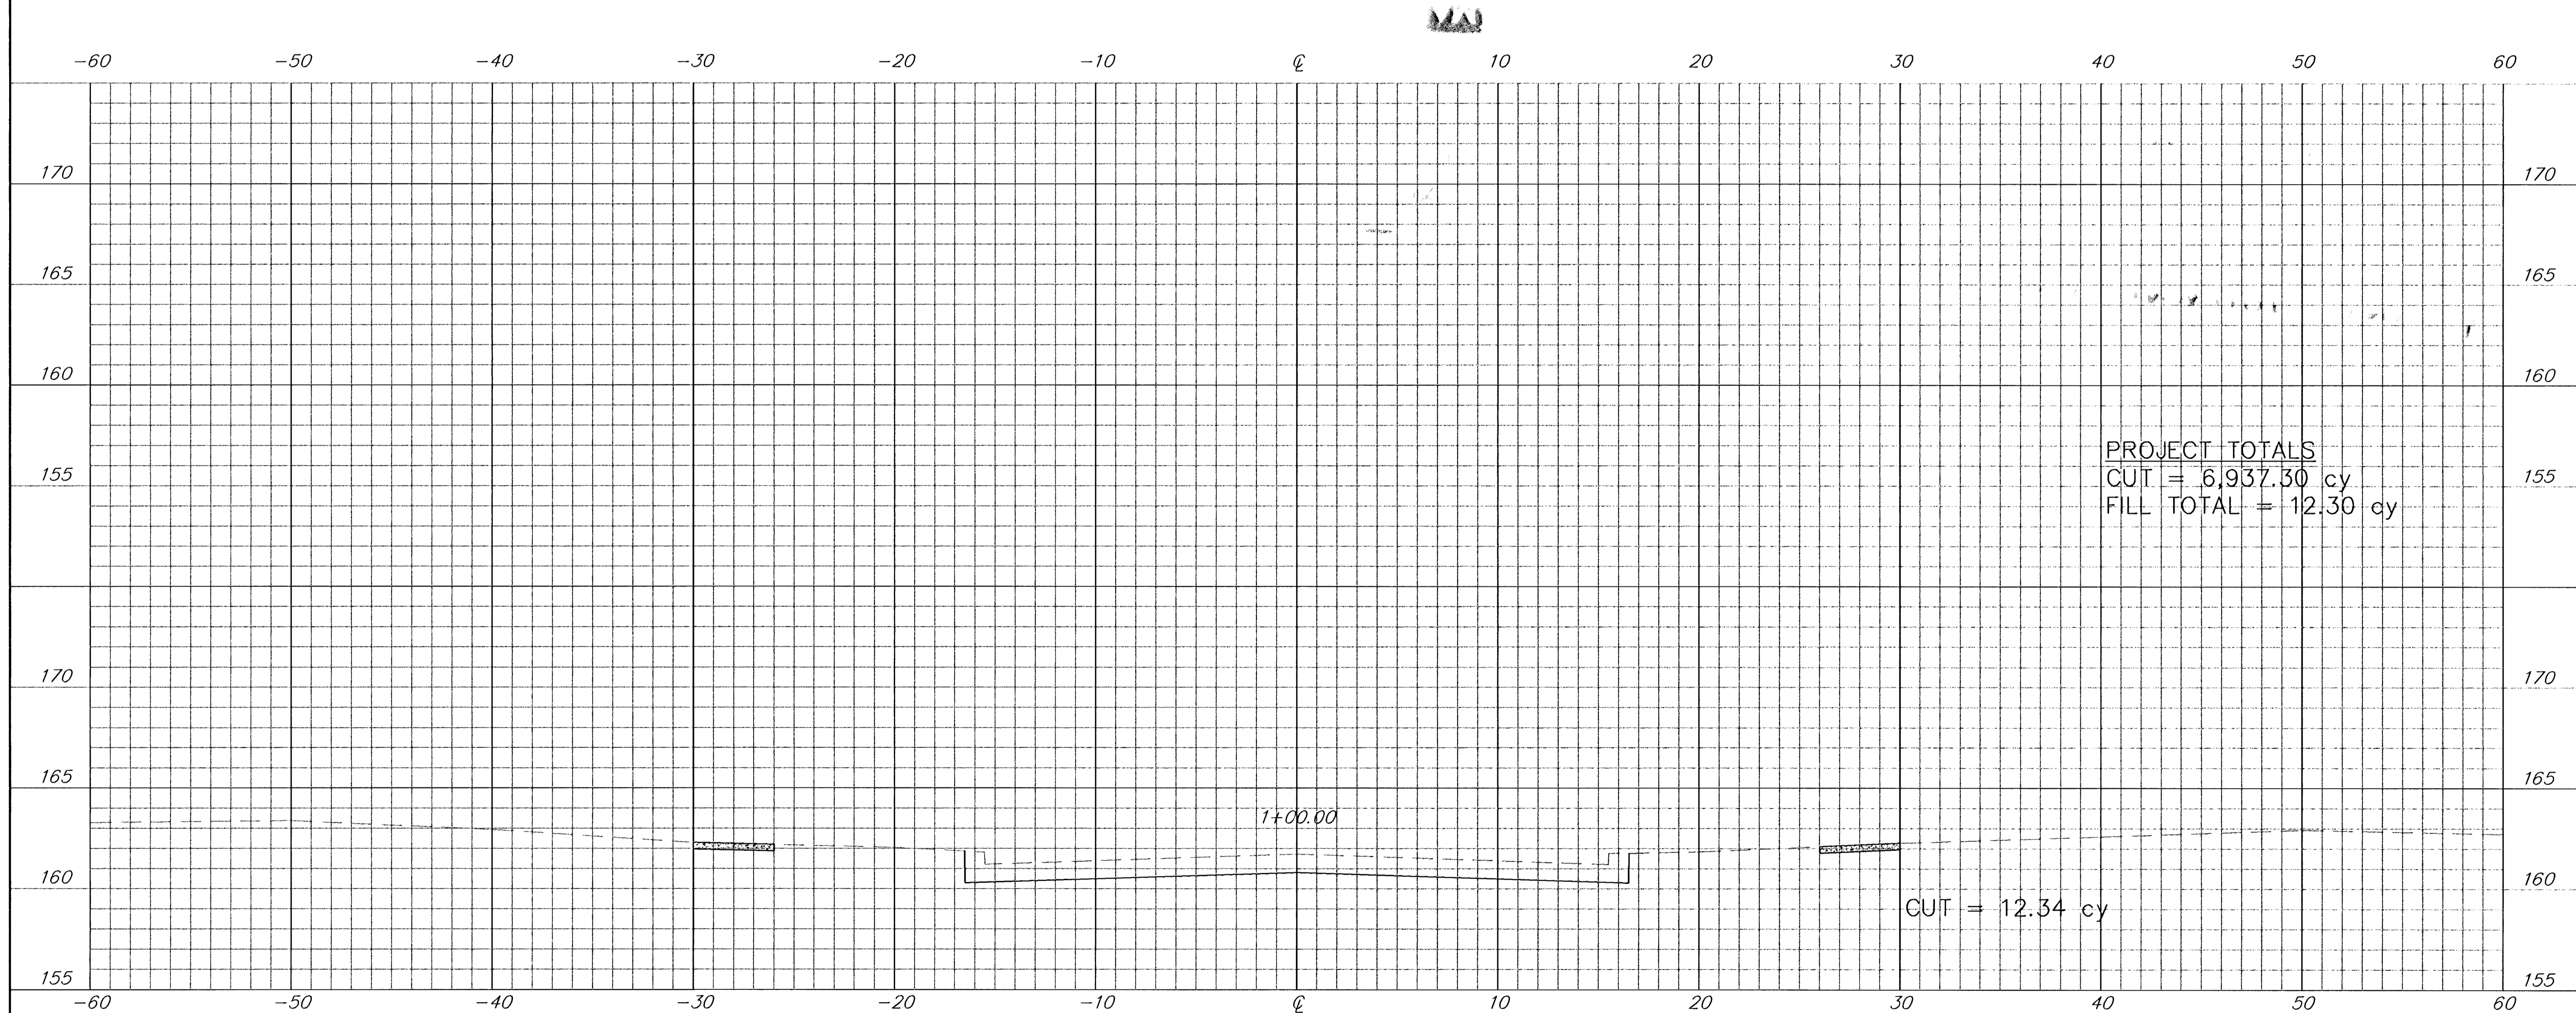

	PROJECT NUMBER <b>472-83229</b>		AW NO. 00102	<b>Orme Street Paving Plans</b> <b>COTTONWOOD X-SECTIONS</b> Wichita, Kansas	SHEET <b>21</b> OF <b>27</b>
	DESIGN MP	DRAWN SS	FILE KSEC		

F:\APPS\DATA\PROJECTS\001\00102\Plans\Ksec.dwg Tue Jan 26 11:02:20 2005 Steve Schmidt-Poe & Associates of Kansas, Inc.