


CURVE TABLE					
$\Delta = 43^{\circ}22'25''$ R = 150.00' T = 59.65' L = 113.55' LC = 110.86'					
CURVE DATA BASED ON CENTERLINE $\Delta/2 = 21^{\circ}41'12''$					
STATION	ARC	CHORD LENGTH		DEFLECTION	TOTAL DEFLECTION
		13'Off LtCb	13'Off RtCb		
15+95.59	-	-	-	00'00"00"	00'00"00"
16+25.00	29.41'	24.47'	34.26'	05'37"01"	05'37"01"
16+50.00	25.00'	20.81'	29.13'	04'46"29"	10'23"30"
16+75.00	25.00'	20.81'	29.13'	04'46"29"	15'09"58"
17+00.00	25.00'	20.81'	29.13'	04'46"29"	19'56"27"
17+09.14	9.14'	7.62'	10.66'	01'44"45"	21'41"13"

Def/Ft = 11.45916 Min.


CURVE TABLE				
$\Delta = 43^{\circ}22'25''$ R = 150.00' T = 59.65' L = 113.55' LC = 110.86'				
CURVE DATA BASED ON CENTERLINE $\Delta/2 = 21^{\circ}41'12''$				
STATION	ARC	CHORD LENGTH		TOTAL DEFLECTION
		13'Off LtCb	13'Off RtCb	
17+77.90	-	-	-	00'00"00"
18+00.00	22.10'	25.76'	18.40'	04'13"15"
18+25.00	25.00'	29.13'	20.81'	04'46"29"
18+50.00	25.00'	29.13'	20.81'	04'46"29"
18+75.00	25.00'	29.13'	20.81'	04'46"29"
18+91.45	16.45'	19.18'	13.70'	03'08"31"

Def/Ft = 11.45916 Min.

NOTE:
TOP OF CURB ELEVATIONS SHOWN ARE FOR FULL CURB.

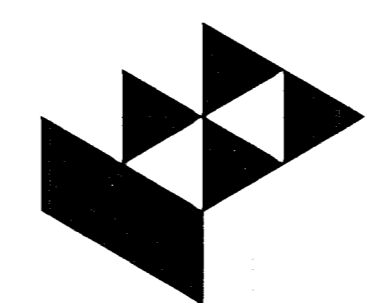

GossesLivingston
Architecture
1200 S. Douglas
Wichita, KS 67202
316-261-1100



MKEC
ENGINEERING
CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67206
316-684-9600

GROVE PARK IMPROVEMENTS
PROJECT NAME

STREET PAVING
SHEET TITLE

JTC DESIGN BY: DM DRAWN BY: GJA CHECKED BY:
OCTOBER 2001 JOB NO. 01060E4 CP 104 / 50 SHEET/OF