
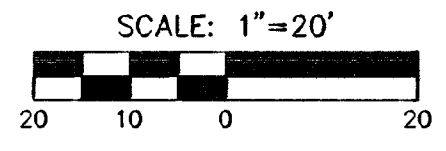


SUBDIVISION BENCH MARKS				
NO.	STREET AND STATION	FROM CL	DESCRIPTION	ELEVATIONS
1	BEDFORD ST. STA., 29+38.13	17.5' LT	SOUTH END OF RETURN AT BEDFORD ST. AND BEDFORD CIR.	
2	BEDFORD ST. STA., 32+66.66	17.5' LT	NORTH END OF RETURN AT BEDFORD ST. AND BEDFORD CT.	
3	BEDFORD CT. STA., 12+62.50	14.5' LT	EAST END OF RETURN AT BEDFORD CT. AND BEDFORD CT.	
4	BEDFORD CIR. STA., 13+00.90	14.5' RT	EAST CURB NORTH SIDE OF CURB INLET BETWEEN LOTS 22 & 23	
5	BEDFORD CT. STA., 13+67.00	14.5' RT	SOUTH CURB BETWEEN LOTS 46 & 47, INFRONT OF F.H.	

NOTE: CONTRACTOR SHALL INSTALL SUBDIVISION BENCH MARKS ("FLAT SURVEY MARKERS NO. 8134-08 3" TOP DIAMETER" PROVIDED BY KANSAS BLUE PRINT CO., INC.) COSTS TO BE CONSIDERED SUBSIDIARY TO CONSTRUCTION OF COMBINED CURB AND GUTTER.

CURVE TABLE					
$\Delta = 29^{\circ}48'20''$ R = 130.00' T = 34.60' L = 67.63' LC = 66.87'					
CURVE DATA BASED ON CENTERLINE $\Delta / 2 = 14^{\circ}54'10''$					
STATION	ARC	CHORD LENGTH		DEFLECTION	TOTAL DEFLECTION
		8' Off Ltcb	8' Off Rtcb		
13+25.00	-	-	-	00°00'00"	00°00'00"
13+50.00	25.00'	29.19'	20.74'	05°30'33"	05°30'33"
13+75.00	25.00'	29.19'	20.74'	05°30'33"	11°01'08"
13+92.63	17.63'	20.59'	14.83'	03°53'04"	14°54'10"
Del/Ft = 13.22210 Min.					

PINE MEADOW 2ND ADDITION



H:\CIVIL\01077\DWG\PAV\2NDADD\PH1\01077_E5

PINE MEADOW SECOND ADDITION
PHASE 1
PROJECT NAME

PAVING PLANS
SHEET TITLE

DFL DESIGN BY. DMU DRAWN BY. GJA CHECKED BY.

MARCH 2002 DATE. 01077_E5 JOB NO. 10 / 35 SHEET/OF

H:\CIVIL\01077\DWG\PAV\2NDADD\PH1\01077_E5.DWG Tue Mar 05 17:43:19 2002