

2007 SANITARY SEWER RECONSTRUCTION


PHASE 9

OCA # 620488 / 468-84392

(VARIOUS LOCATIONS)

SITE NO.	<u>GENERAL LOCATION</u>	<u>PIPE SIZE</u>	<u>UPSTREAM MANHOLE</u>	<u>DOWNSTREAM MANHOLE</u>	<u>UPSTREAM INVERT ELEVATION</u> <small>(City Datum)</small>	<u>DOWNSTREAM INVERT ELEVATION</u> <small>(City Datum)</small>	<u>LENGTH</u> <small>(FT.)</small>
1	Easements east of Fountain and south of 17th Street North	8"	5749-178	5749-176	203.08	202.88	146
		8"	5749-177	5749-176	205.18	205.00	175
		8"	5749-176	5749-170	Point Repair & Manhole Work		
		8"	5749-172	5749-171	Point Repair & Manhole Work		
		8"	5749-169	5749-168	Manhole Work		
2	Easement south of 23rd Street North, east of Hydraulic	8"	5650-073	5650-072	116.75	116.51	230
3	Easement north of 24th Street North, from east of Estelle to Prince, and Easement west of Green Street, from Prince to 23rd St. North	8"	5650-231	5650-230	Manhole Work		
		8"	5650-230	5650-229	156.39	156.00	98
		8"	5650-229	5650-228	152.80	152.40	100
		8"	5650-228	5650-227	152.40	152.00	99
		8"	5650-227	5650-226	Manhole Work		
		8"	5650-225	5650-224	Manhole Work		
	8"	5650-223		Manhole Work			
4	Easements east of Whitfield and south of 11th St. North	8"	5948-387	5948-386	Point repair & manhole work		
		8"	5948-380	5948-379	Point repair & manhole work		
		8"	5948-379	5948-374	177.59	177.09	240
						Total linear feet =	1088

GENERAL LOCATION MAP

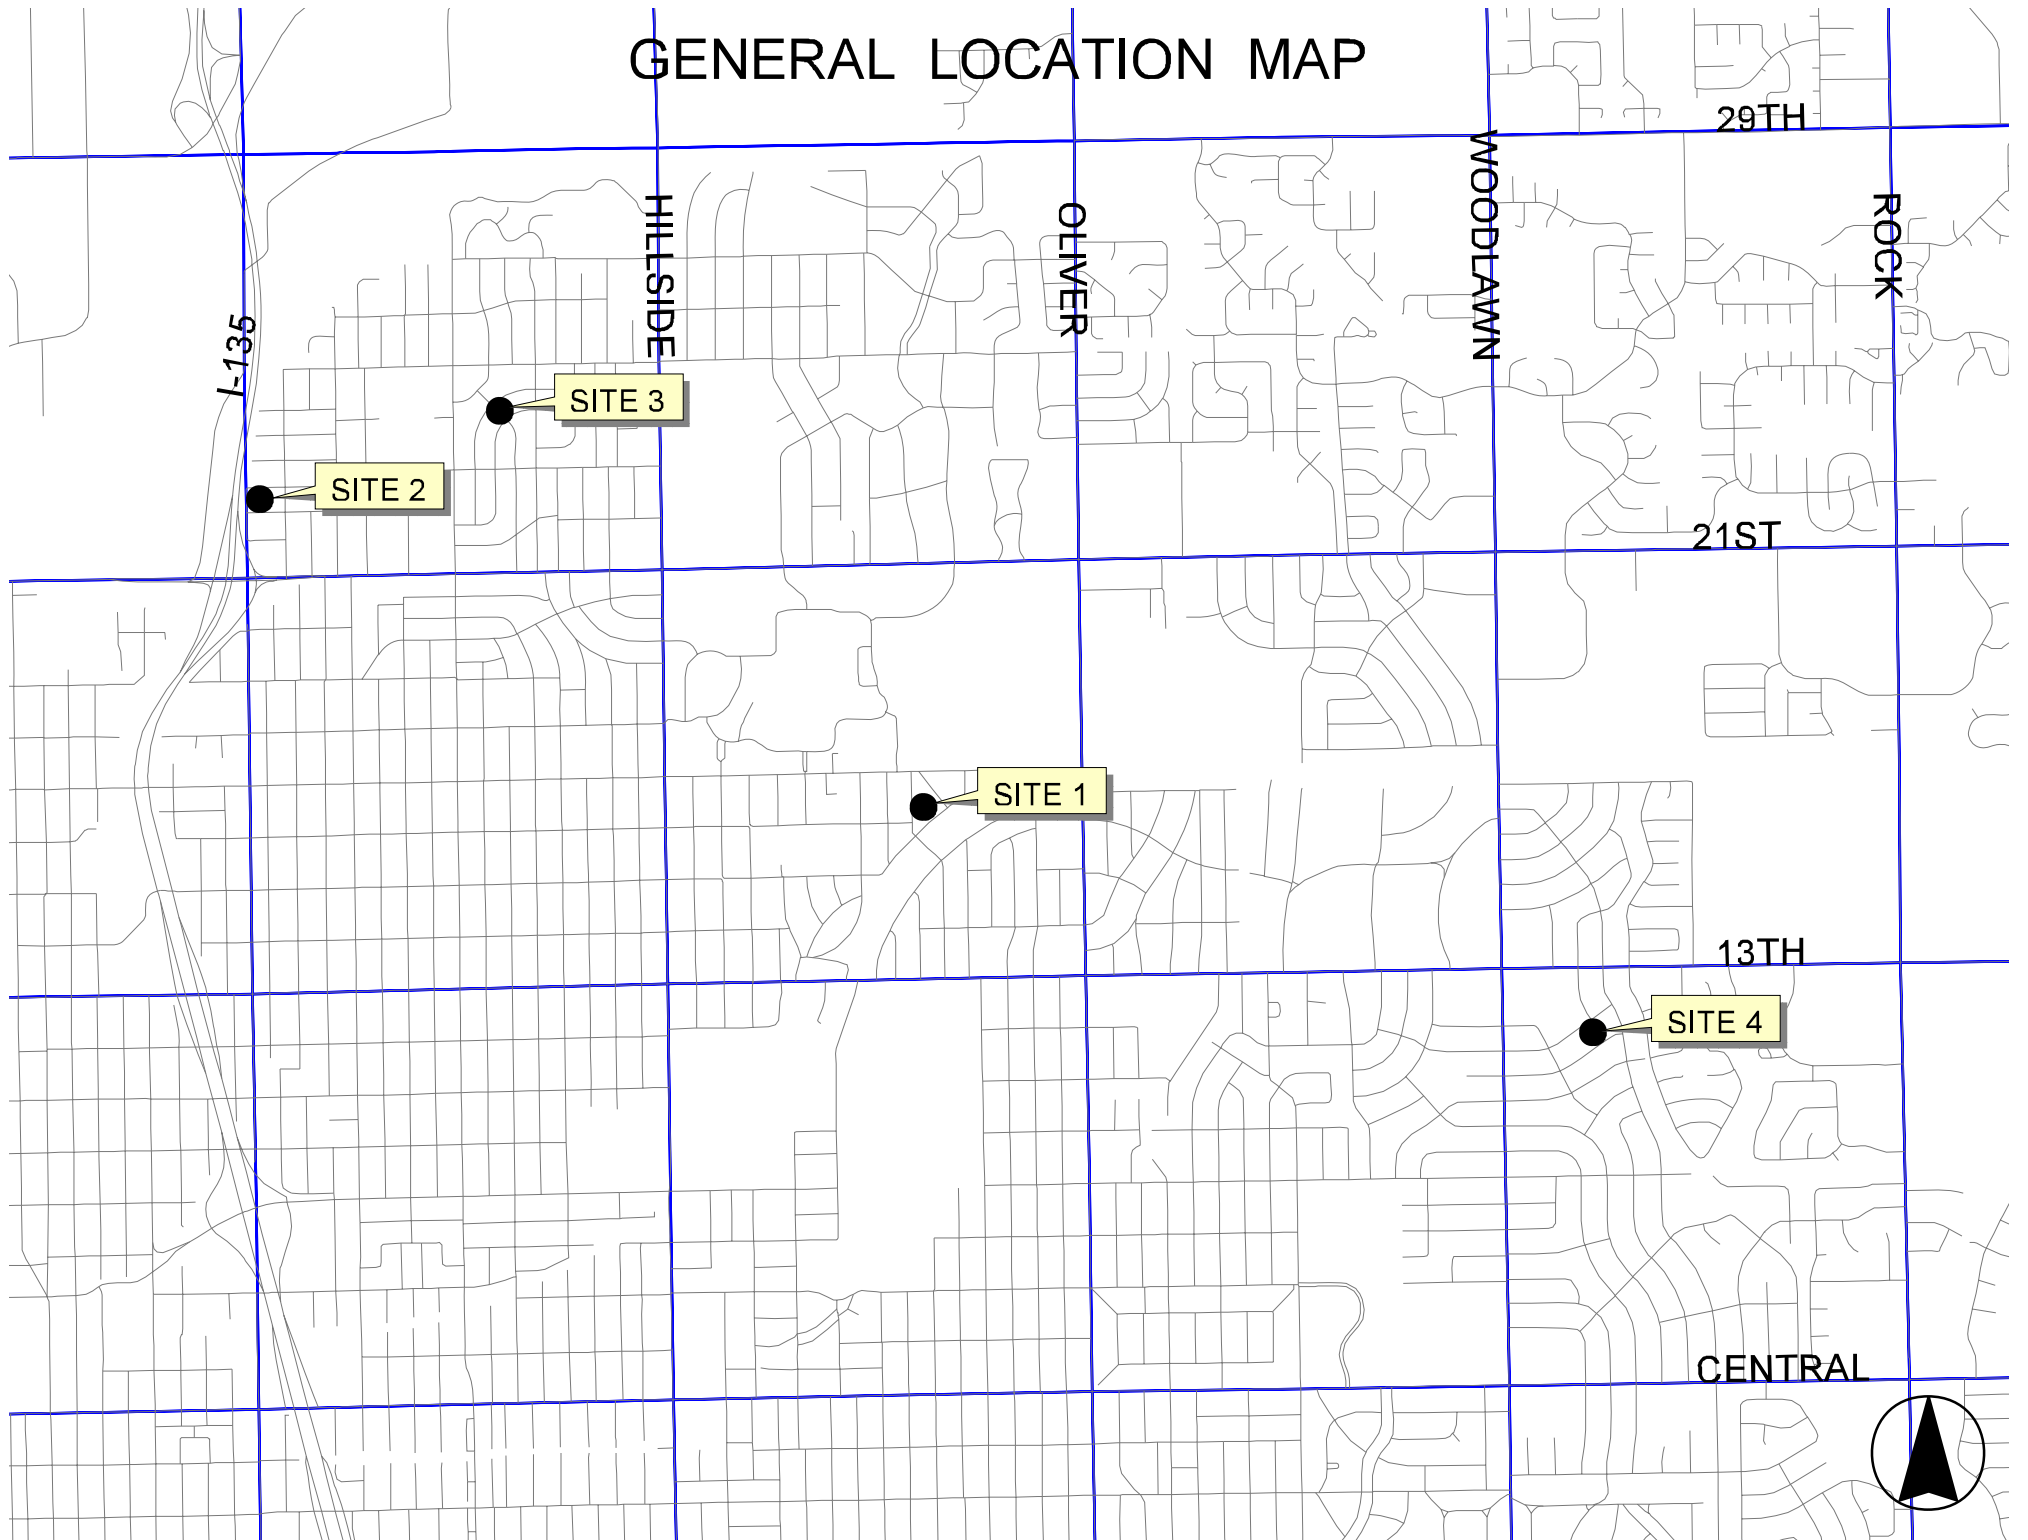

Bid Items by Site Reference

2007 Sanitary Sewer Reconstruction, Phase 9 (various locations)

Bid Item	Site 1	Site 2	Site 3	Site 3	Site 4	Site 4	Totals	
			Map 1 of 2	Map 2 of 2	Map 1 of 2	Map 2 of 2		
8" Pipe Removed & Replaced	321	230	297			240	1088	lf
Point Repair (5 lf)	1						1	ea
Point Repair (70 lf)	1						1	ea
Point Repair (53 lf)					1		1	ea
Point Repair (15 lf)					1		1	ea
Adjust Manhole to Grade	1						1	ea
Locate, Expose and Adjust Manhole to Grade			1				1	ea
Replace Manhole Frame & Cover	7	2	4	4	2	2	21	ea
Remove & Replace Manhole Bench & Invert	5	1	3	3			12	ea
Construct Outside Drop				2			2	ea
Soil Erosion BMPs							1	ls
Site Preparation & Restoration							1	ls