


DRAINAGE PLAN

WESTGATE VILLAGE 2ND ADDITION

WICHITA, SEDGWICK COUNTY, KANSAS

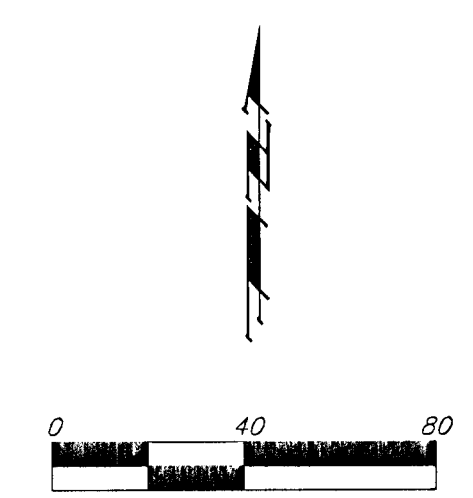

- CB = Catch Basin
- DR = Delineator
- FH = Fire Hydrant
- GP = Guy Pole
- Guy = Guy Anchor
- HLP = High Line Pole
- SlpP = Signal Pole
- Sign = Sign
- SSMH = Sanitary Sewer Manhole
- SMB Ped = Southwestern Bell Pedestal
- SWSMH = Stormwater Sewer Manhole
- TB = Traffic Box
- TMH = Traffic Manhole
- WV = Water Valve
- = 1/2" IRON (FOUND)
- = #4 BAUGHMAN PIN (SET)
- = V-NOTCH FOUND
- △ = MM V-NOTCH FOUND
- × = CROSS (FOUND)
- ∅ = 12" IRON (FOUND)

Drainage Area	Area (acres)	C ₂	C ₁₀₀	T _c (min.)	I ₂ (in/hr)	I ₁₀₀ (in/hr)	Q ₂ (cfs)	Q ₁₀₀ (cfs)
1	1.28	.90	.90	15	3.83	7.37	4.41	8.49
2	2.23	.90	.90	15	3.83	7.37	7.69	14.8
3	1.33	.90	.90	15	3.83	7.37	4.58	8.82

CITY OF WICHITA BENCH MARK - DISC
109.50 FEET NORTH AND 71 FEET WEST
OF THE CENTER LINE OF MAIZE ROAD
AND 13TH STREET 2 FEET EAST OF
EAST FACE OF WALL.
ELEVATION = 160.02 CITY DATUM

