



Date 9/19/94 Page 1 of

Project Shops @ Tallgrass

Item Drainage Plan

Hydrology - Use Rational Method $Q = CiA$

Determine C

<u>Basin</u>	<u>Use</u>	<u>C₅</u>	<u>C₁₀₀</u>
1	100% Parking/Roof	0.85	0.93
2	100% Parking/Roof	0.85	0.93
3	100% Parking/Roof	0.85	0.93
4	100% Parking/Roof	0.85	0.93
5	100% Parking/Roof	0.85	0.93
6	100% Parking/Roof	0.85	0.93
7	50% Roof/50% Lawn	0.60	0.79

Areas

<u>Basin</u>	<u>Area (ac)</u>
1	0.77
2	0.85
3	1.59
4	0.59
5	0.36
6	0.79



Date 9/19/94 Page 2 of

Project Shops @ Tallgrass

Item Drainage Plan

Determine Q_5 & Q_{100}

$t_c = 15$ min for all basins;

$i_5 = 4.61$

$i_{100} = 7.36$

<u>Basin</u>	<u>Area</u>	<u>C_s</u>	<u>C_{100}</u>	<u>i_5</u>	<u>i_{100}</u>	<u>Q_5</u>	<u>Q_{100}</u>
1	0.77	0.85	0.93	4.61	7.36	3.02	5.27
2	0.85	0.85	0.93	4.61	7.36	3.33	5.82
3	1.59	0.85	0.93	4.61	7.36	6.23	10.88
4	0.59	0.85	0.93	4.61	7.36	2.31	4.04
5	0.36	0.85	0.93	4.61	7.36	1.41	2.46
6	0.79	0.85	0.93	4.61	7.36	3.10	5.41
7	0.92	0.60	0.79	4.61	7.36	2.55	5.35



Date 9/19/94 Page 3 of

Project Shops @ Tallgrass

Item Drainage Plan

System 100

<u>Node</u>	<u>Structure</u>	<u>Contrib. Basin</u>
100	Exist. Inlet	—
101	Exist. Inlet → to be conv. to MH	7
102	MH	—
103	MH	—
104	Area Inlet	2
105	Area Inlet	3
106	Area Inlet	80% of 1
107	MH	—
108	Area Inlet	5
109	Area Inlet	4

Set Starting Hydraulic Grade Line Elev. @

$$TC\ 100 - 1' = 198.75 - 1' = \underline{197.75}$$

Date: 09-19-1994
Time: 11:44:16

Input File: SHOPSRCP.STM

The Shops at Tallgrass
Storm Sewer System
DRC 9-6-94

Storm Frequency = 5-Year

* * * HYDROLOGY * * *

Tributary Area										Hydrology Summation				Conduit Data				
Node to Node	C	Area (Ac)	Slope (%)	Length (Ft)	TC(0) (Min)	I(0) (In/Hr)	Q(0) (CFS)	TC (Min)	I (In/Hr)	Q (CFS)	Sum Q (CFS)	Size	Velocity (Ft/Sec)	Length (Ft)	TT (Min)	TT+TC (Min)		
109 107	.00	.00	.00	.0	15.00	4.56	2.30	15.00	4.56	2.30	2.30	15"	1.87	50.00	.44	15.44		
108 107	.00	.00	.00	.0	15.00	4.56	1.40	15.00	4.56	1.40	1.40	15"	1.14	120.00	1.75	16.75		
107 104	.00	.00	.00	.0	.00	.00	.00	16.75	4.34	.00	3.62	18"	2.05	300.00	2.44	19.19		
105 104	.00	.00	.00	.0	15.00	4.56	6.20	15.00	4.56	6.20	6.20	18"	3.51	120.00	.57	15.57		
104 103	.00	.00	.00	.0	15.00	4.56	3.30	19.19	4.08	2.95	12.21	24"	3.89	80.00	.34	19.54		
106 103	.00	.00	.00	.0	15.00	4.56	2.40	15.00	4.56	2.40	2.40	15"	1.96	100.00	.85	15.85		
103 102	.00	.00	.00	.0	.00	.00	.00	19.54	4.04	.00	14.39	24"	4.58	100.00	.36	19.90		
102 101	.00	.00	.00	.0	.00	.00	.00	19.90	4.01	.00	14.39	24"	4.58	90.00	.33	20.23		
101 100	.00	.00	.00	.0	15.00	4.56	2.50	20.23	3.97	2.18	16.57	24"	5.27	110.00	.35	20.58		

09-19-1994

Date: 09-19-1994
Time: 11:44:16

Input File: SHOPSRCP.STM

The Shops at Tallgrass
Storm Sewer System
DRC 9-6-94

Storm Frequency = 5-Year

* * * H Y D R A U L I C S * * *

```
*****
Node      Hyd-Slope  Friction  Bend    Transition  Manhole  Deflection  Junction  Total  Hyd-Gl  Desired  Diff.
          (Ft/Ft)   (Ft)     (Ft)    (Ft)        (Ft)     (Ft)       (Ft)     (Ft)   Elevation Elevation (Ft)
*****
```

Node	Hyd-Slope (Ft/Ft)	Friction (Ft)	Bend (Ft)	Transition (Ft)	Manhole (Ft)	Deflection (Ft)	Junction (Ft)	Total (Ft)	Hyd-Gl Elevation	Desired Elevation	Diff. (Ft)
100	.00000	.0000	.0000	.0000	.0000	.0000	.0000	.0000	197.7500	198.7500	1.00
101	.00536	.5901	.0000	.0106	.0000	.0902	.2364	.9273	198.6773	199.2600	.58
102	.00405	.3641	.0000	.0000	.0163	.1309	.0203	.5315	199.2088	203.0000	3.79
103	.00405	.4045	.0000	.0091	.0000	.0721	.1554	.6411	199.8499	204.5000	4.65
104	.00291	.2330	.0000	.0043	.0000	.0256	.2877	.5506	200.4005	202.6000	2.20
105	.00348	.4180	.0000	.0000	.0000	.0000	.0000	.4180	200.8185	202.6000	1.78
106	.00138	.1380	.0000	.0000	.0000	.0000	.0000	.1380	199.9879	203.4500	3.46
107	.00119	.3560	.0000	.0011	.0000	.0168	.0592	.4331	200.8336	207.5000	6.67
108	.00047	.0564	.0000	.0000	.0000	.0000	.0000	.0564	200.8899	206.9500	6.06
109	.00127	.0634	.0000	.0000	.0000	.0000	.0000	.0634	200.8969	206.0000	5.10

```
*****
```



Date 9/19/94 Page _____ of _____

Project Shops @ Tallgrass

Item Drainage Plan

Inlet Capacity

<u>Node</u>	<u>Type</u>	<u>Q_{in}</u>	<u>d. (in)</u>	<u>Comment</u>
104	4'x2', w/curb	3.33	0.27'	OK
105	4'x2' w/curb	6.23	0.43'	OK
106	2'x2' w/curb	2.40	0.26'	OK
108	4'x2' no curb	1.41	0.16'	OK
109	4'x2' no curb	2.31	0.21'	OK

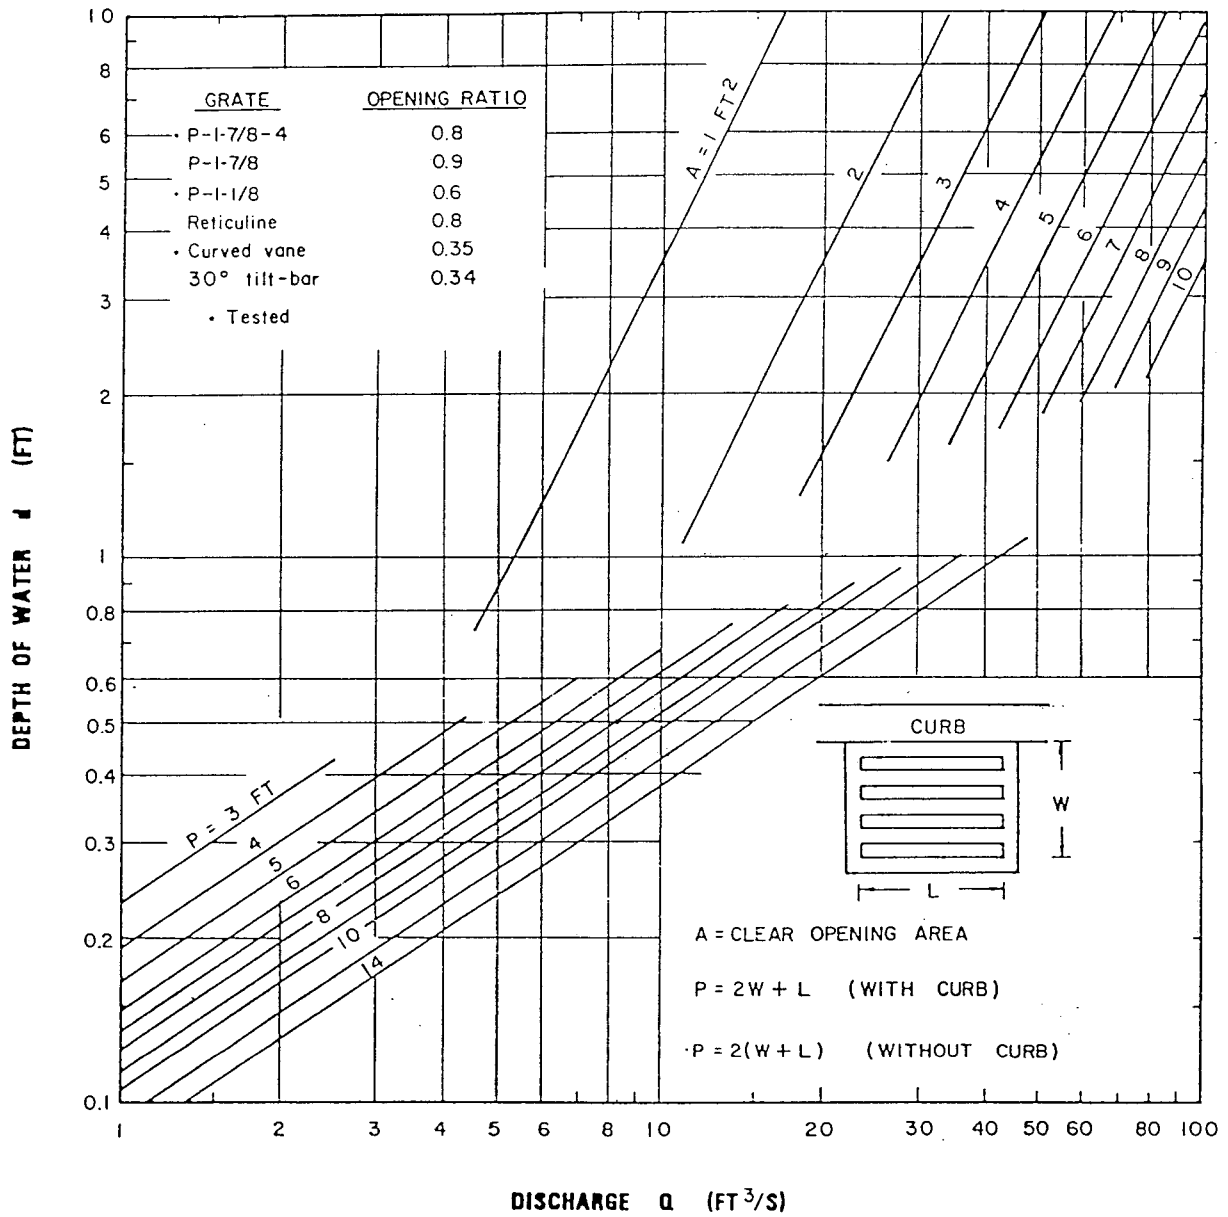


CHART 11. Grate inlet capacity in sump conditions.

From: HEC-12, DRAINAGE OF HIGHWAY PAVEMENTS, F.H.W.A., MAR 1984

ATTACHMENT D

DRAINAGE CRITERIA

CITY OF WICHITA, KANSAS

RECOMMENDED RUNOFF COEFFICIENTS FOR RATIONAL METHOD
AND PERCENT IMPERVIOUS FOR UNIT HYDROGRAPH METHOD

Land Use or Surface Characteristics	Percent Impervious	Frequency			
		2	5	10	100
1. Business:					
Lowntown Areas	95	0.84	0.85	0.87	0.91
Neighborhood Areas	70	0.68	0.69	0.73	0.80
2. Residential:					
<u>Single Family (Soil Group D)</u>					
1/8 Acre	50	0.57	0.61	0.66	0.79
1/4 Acre	38	0.50	0.54	0.62	0.76
1/3 Acre	30	0.46	0.50	0.59	0.73
1/2 Acre	25	0.42	0.48	0.56	0.72
3/4 Acre	22	0.42	0.46	0.55	0.71
1 Acre	20	0.41	0.45	0.54	0.71
<u>Multi-Family (Soil Group D)</u>					
Multi-Unit (detached)	60	0.62	0.66	0.72	0.82
Multi-Unit (attached)	65	0.64	0.68	0.73	0.83
Apartments	75	0.70	0.73	0.79	0.86
<u>Single Family (Soil Group C)</u>					
1/8 Acre	50	0.55	0.58	0.64	0.73
1/4 Acre	38	0.48	0.51	0.57	0.68
1/3 Acre	30	0.43	0.46	0.53	0.65
1/2 Acre	25	0.40	0.43	0.50	0.63
3/4 Acre	22	0.39	0.42	0.49	0.62
1 Acre	20	0.37	0.40	0.48	0.61
<u>Multi-Family (Soil Group C)</u>					
Multi-Unit (detached)	60	0.60	0.63	0.69	0.77
Multi-Unit (attached)	65	0.63	0.66	0.71	0.79
Apartments	75	0.68	0.72	0.77	0.83
<u>Single-Family (Soil Group B)</u>					
1/8 Acre	50	0.52	0.54	0.59	0.67
1/4 Acre	38	0.44	0.46	0.52	0.61
1/3 Acre	30	0.39	0.41	0.47	0.57
1/2 Acre	25	0.36	0.38	0.44	0.54
3/4 Acre	22	0.34	0.36	0.42	0.52
1 Acre	20	0.33	0.35	0.40	0.51
<u>Multi-Family (Soil Group B)</u>					
Multi-Unit (detached)	60	0.58	0.60	0.65	0.72
Multi-Unit (attached)	65	0.61	0.64	0.68	0.75
Apartments	75	0.67	0.70	0.74	0.80

Land Use or face Characteristics	Percent Impervious	Frequency			
		2	5	10	100
<u>Single Family (Soil Group A)</u>					
1/8 Acre	50	0.47	0.50	0.54	0.60
1/4 Acre	38	0.39	0.41	0.45	0.52
1/3 Acre	30	0.33	0.35	0.39	0.47
1/2 Acre	25	0.30	0.31	0.35	0.44
3/4 Acre	22	0.28	0.29	0.33	0.42
1 Acre	20	0.26	0.28	0.32	0.40
<u>Multi-Family (Soil Group A)</u>					
Multi-Unit (detached)	60	0.55	0.57	0.61	0.67
Multi-Unit (attached)	65	0.58	0.60	0.64	0.70
Apartments	75	0.65	0.68	0.72	0.77
3. Industrial:					
Light Areas	70	0.68	0.69	0.73	0.80
Heavy Areas	80	0.74	0.76	0.79	0.84
4. Playgrounds:					
	15	0.33	0.35	0.42	0.55
5. Schools:					
	40	0.49	0.51	0.56	0.66
6. Railroad Yard Areas:					
	30	0.43	0.45	0.50	0.62
Undeveloped Urban Areas:					
Offsite Flow Analysis (when land use not defined)	45	0.52	0.54	0.59	0.68
8. Streets:					
Paved	99	0.87	0.88	0.90	0.93
Gravel	00	0.24	0.26	0.33	0.48
9. Drive, Parking Lots and Walks:					
	96	0.87	0.87	0.88	0.89
10. Roofs:					
	90	0.80	0.85	0.90	0.93
11. Urban Lawn Areas (See Note No. 1 below):					
<u>Soil Group A</u>					
Slope less than 1%	00	0.08	0.09	0.13	0.23
Slope 1% to 4%	00	0.12	0.13	0.17	0.27
Slope more than 4%	00	0.16	0.17	0.21	0.31
<u>Soil Group B</u>					
Slope less than 1%	00	0.16	0.18	0.24	0.37
Slope 1% to 4%	00	0.20	0.22	0.28	0.41
Slope more than 4%	00	0.24	0.26	0.32	0.45
<u>Soil Group C</u>					
Slope less than 1%	00	0.24	0.27	0.35	0.51
Slope 1% to 4%	00	0.26	0.29	0.37	0.53
Slope more than 4%	00	0.28	0.31	0.39	0.55

Land Use or Surface Characteristics	Percent Impervious	Frequency			
		2	5	10	100
<u>Soil Group D</u>					
Slope less than 1%	00	0.28	0.33	0.43	0.63
Slope 1% to 4%	00	0.30	0.35	0.45	0.65
Slope more than 4%	00	0.32	0.37	0.47	0.67

Note No. 1: Coefficients shown in the above table are for pervious open space areas with thick turf which includes pervious areas in parks and cemeteries. Coefficients shown above must be increased 0.02 for use with agricultural pasture areas. Coefficients shown above must be reduced by 0.04 for use with agricultural cultivated areas. Group A soils are well-drained, coarse textured sands with high infiltration rates. Group B soils are moderately well-drained, moderately coarse textured soils with moderate infiltration rates. Group C soils are moderately poor-drained, moderately fine textured soils with slow infiltration rates. Group D soils are poor-drained, fine textured soils with very slow infiltration rates.

GENERAL NOTE: These Rational Formula Coefficients may not be valid for basins 320 acres or larger.

RAINFALL INTENSITY TABLE

SEDGWICK COUNTY
KANSAS

THIS TABLE CONTAINS AVERAGE RAINFALL INTENSITIES
IN INCHES PER HOUR.

DURATION, HR:MIN	RETURN PERIOD						
	1 YR	2 YR	5 YR	10 YR	25 YR	50 YR	100 YR
0:05	4.77	5.52	6.56	7.32	8.44	9.32	10.20
0:06	4.53	5.26	6.27	7.02	8.11	8.96	9.81
0:07	4.33	5.04	6.03	6.76	7.82	8.65	9.48
0:08	4.16	4.85	5.82	6.52	7.55	8.36	9.17
0:09	4.00	4.67	5.61	6.30	7.30	8.09	8.87
0:10	3.85	4.50	5.42	6.08	7.06	7.82	8.58
0:11	3.71	4.34	5.23	5.88	6.83	7.56	8.30
0:12	3.58	4.19	5.06	5.69	6.60	7.32	8.04
0:13	3.45	4.05	4.90	5.51	6.40	7.10	7.79
0:14	3.34	3.92	4.75	5.34	6.21	6.89	7.57
0:15	3.23	3.80	4.61	5.19	6.04	6.70	7.36
0:16	3.13	3.69	4.48	5.05	5.88	6.53	7.17
0:17	3.03	3.58	4.36	4.92	5.73	6.37	7.00
0:18	2.94	3.48	4.25	4.80	5.60	6.22	6.84
0:19	2.86	3.39	4.14	4.69	5.47	6.09	6.70
0:20	2.78	3.30	4.05	4.58	5.35	5.96	6.56
0:21	2.70	3.21	3.95	4.48	5.24	5.84	6.43
0:22	2.63	3.14	3.87	4.39	5.14	5.72	6.30
0:23	2.56	3.06	3.78	4.30	5.04	5.61	6.19
0:24	2.50	2.99	3.71	4.21	4.94	5.51	6.07
0:25	2.44	2.93	3.63	4.13	4.85	5.41	5.97
0:26	2.38	2.86	3.56	4.05	4.76	5.31	5.86
0:27	2.33	2.80	3.49	3.98	4.68	5.22	5.76
0:28	2.28	2.75	3.43	3.91	4.59	5.13	5.66
0:29	2.23	2.69	3.36	3.84	4.52	5.04	5.57
0:30	2.19	2.64	3.30	3.77	4.44	4.96	5.48
0:31	2.14	2.59	3.24	3.71	4.37	4.88	5.39
0:32	2.10	2.54	3.19	3.64	4.30	4.80	5.31
0:33	2.06	2.50	3.14	3.58	4.23	4.73	5.22
0:34	2.02	2.45	3.08	3.53	4.16	4.65	5.14
0:35	1.99	2.41	3.03	3.47	4.10	4.58	5.07
0:36	1.95	2.37	2.99	3.42	4.03	4.51	4.99
0:37	1.92	2.33	2.94	3.36	3.97	4.45	4.92
0:38	1.89	2.30	2.89	3.31	3.91	4.38	4.84
0:39	1.86	2.26	2.85	3.27	3.86	4.32	4.77
0:40	1.83	2.23	2.81	3.22	3.80	4.26	4.71
0:41	1.80	2.19	2.77	3.17	3.75	4.20	4.64
0:42	1.77	2.16	2.73	3.13	3.70	4.14	4.58
0:43	1.75	2.13	2.69	3.08	3.65	4.08	4.52
0:44	1.72	2.10	2.65	3.04	3.60	4.03	4.46
0:45	1.70	2.07	2.62	3.00	3.55	3.97	4.40

RAINFALL INTENSITY TABLE

SEDGWICK COUNTY
KANSAS

THIS TABLE CONTAINS AVERAGE RAINFALL INTENSITIES
IN INCHES PER HOUR.

DURATION, HR:MIN	RETURN PERIOD						
	1 YR	2 YR	5 YR	10 YR	25 YR	50 YR	100 YR
0:46	1.67	2.04	2.58	2.96	3.50	3.92	4.34
0:47	1.65	2.01	2.55	2.92	3.46	3.87	4.29
0:48	1.63	1.98	2.51	2.88	3.41	3.82	4.23
0:49	1.60	1.96	2.48	2.85	3.37	3.78	4.18
0:50	1.58	1.93	2.45	2.81	3.33	3.73	4.13
0:51	1.56	1.91	2.42	2.78	3.29	3.68	4.08
0:52	1.54	1.88	2.39	2.74	3.25	3.64	4.03
0:53	1.52	1.86	2.36	2.71	3.21	3.60	3.98
0:54	1.50	1.84	2.33	2.68	3.17	3.55	3.94
0:55	1.48	1.81	2.30	2.65	3.13	3.51	3.89
0:56	1.46	1.79	2.28	2.62	3.10	3.47	3.85
0:57	1.45	1.77	2.25	2.59	3.06	3.43	3.80
0:58	1.43	1.75	2.23	2.56	3.03	3.40	3.76
0:59	1.41	1.73	2.20	2.53	3.00	3.36	3.72
1:00	1.39	1.71	2.18	2.50	2.96	3.32	3.68
1:05	1.32	1.62	2.06	2.37	2.81	3.15	3.49
1:10	1.25	1.53	1.96	2.25	2.67	3.00	3.33
1:15	1.18	1.46	1.87	2.15	2.55	2.86	3.17
1:20	1.13	1.39	1.78	2.05	2.44	2.74	3.04
1:25	1.07	1.33	1.70	1.97	2.34	2.63	2.91
1:30	1.03	1.27	1.63	1.89	2.24	2.52	2.80
1:35	0.98	1.22	1.57	1.81	2.16	2.43	2.69
1:40	0.94	1.17	1.51	1.75	2.08	2.34	2.60
1:45	0.91	1.13	1.46	1.69	2.01	2.26	2.51
1:50	0.87	1.09	1.41	1.63	1.94	2.18	2.42
1:55	0.84	1.05	1.36	1.57	1.88	2.11	2.35
2:00	0.81	1.02	1.32	1.52	1.82	2.05	2.28
2:05	0.79	0.98	1.28	1.48	1.76	1.99	2.21
2:10	0.76	0.95	1.24	1.43	1.71	1.93	2.14
2:15	0.74	0.92	1.20	1.39	1.67	1.88	2.08
2:20	0.72	0.90	1.17	1.36	1.62	1.82	2.03
2:25	0.70	0.87	1.14	1.32	1.58	1.78	1.98
2:30	0.68	0.85	1.11	1.29	1.54	1.73	1.93
2:35	0.66	0.83	1.08	1.25	1.50	1.69	1.88
2:40	0.64	0.81	1.05	1.22	1.46	1.65	1.83
2:45	0.62	0.79	1.03	1.19	1.43	1.61	1.79
2:50	0.61	0.77	1.00	1.17	1.40	1.57	1.75
2:55	0.59	0.75	0.98	1.14	1.37	1.54	1.71
3:00	0.58	0.73	0.96	1.12	1.34	1.51	1.68

RAINFALL INTENSITY TABLE

SEDGWICK COUNTY
KANSAS

THIS TABLE CONTAINS AVERAGE RAINFALL INTENSITIES
IN INCHES PER HOUR.

DURATION, HR:MIN	RETURN PERIOD						
	1 YR	2 YR	5 YR	10 YR	25 YR	50 YR	100 YR
3:15	0.54	0.69	0.90	1.05	1.26	1.42	1.58
3:30	0.51	0.65	0.85	0.99	1.19	1.34	1.49
3:45	0.48	0.61	0.80	0.94	1.12	1.27	1.41
4:00	0.46	0.58	0.76	0.89	1.07	1.21	1.34
4:15	0.44	0.55	0.73	0.85	1.02	1.15	1.28
4:30	0.42	0.53	0.70	0.81	0.98	1.10	1.23
4:45	0.40	0.51	0.67	0.78	0.94	1.06	1.18
5:00	0.38	0.49	0.64	0.75	0.90	1.02	1.13
5:15	0.37	0.47	0.62	0.72	0.87	0.98	1.09
5:30	0.35	0.45	0.60	0.70	0.83	0.94	1.05
5:45	0.34	0.44	0.58	0.67	0.81	0.91	1.01
6:00	0.33	0.42	0.56	0.65	0.78	0.88	0.98
6:30	0.31	0.40	0.52	0.61	0.73	0.83	0.92
7:00	0.30	0.38	0.50	0.58	0.69	0.78	0.87
7:30	0.28	0.36	0.47	0.55	0.66	0.74	0.83
8:00	0.27	0.34	0.45	0.52	0.62	0.70	0.78
8:30	0.26	0.33	0.43	0.50	0.60	0.67	0.75
9:00	0.25	0.31	0.41	0.48	0.57	0.64	0.72
9:30	0.24	0.30	0.39	0.46	0.55	0.62	0.69
10:00	0.23	0.29	0.38	0.44	0.52	0.59	0.66
10:30	0.22	0.28	0.36	0.42	0.50	0.57	0.63
11:00	0.21	0.27	0.35	0.41	0.49	0.55	0.61
11:30	0.21	0.26	0.34	0.39	0.47	0.53	0.59
12:00	0.20	0.25	0.33	0.38	0.45	0.51	0.57
13:00	0.19	0.24	0.31	0.36	0.43	0.48	0.53
14:00	0.18	0.22	0.29	0.34	0.40	0.45	0.50
15:00	0.17	0.21	0.27	0.32	0.38	0.43	0.47
16:00	0.16	0.20	0.26	0.30	0.36	0.40	0.45
17:00	0.15	0.19	0.25	0.29	0.34	0.38	0.43
18:00	0.15	0.18	0.24	0.27	0.33	0.37	0.41
19:00	0.14	0.18	0.23	0.26	0.31	0.35	0.39
20:00	0.14	0.17	0.22	0.25	0.30	0.34	0.37
21:00	0.13	0.16	0.21	0.24	0.29	0.32	0.36
22:00	0.13	0.16	0.20	0.23	0.28	0.31	0.34
23:00	0.12	0.15	0.19	0.22	0.27	0.30	0.33
24:00	0.12	0.15	0.19	0.22	0.26	0.29	0.32