

1.0 Drainage Basin Characteristics

Soil type U6 Urban land - Elandco Complex
 Hydrologic Soil Group: B

Refer to attached UGS map for site location
 Refer to attached topographic survey/drainage plan map for identification of drainage subbasins and existing storm sewers

2.0 Weighted Value Runoff Coefficients (See page 2 of 3)

Predeveloped condition,
 Impervious (paved streets, walks, etc), $C_{100} = 0.89$
 Impervious area = 2.20 ac
 Pervious (lawn, lawns), $C_{100} = 0.37$
 Pervious area = 3.91 ac.
 Avg. "C" = 0.55 (weighted value)

Re-developed condition,
 Impervious area = 3.19 ac.
 Pervious area = 2.92 ac.
 Avg. "C" = 0.44 (weighted value)

3.0 Time of Concentration (refer to attached T_c Curve)

Predeveloped condition,
 D.A. #1, L = 485 ft, $S_{avg} = 0.50\%$, $T_c = 27$ min.
 D.A. #2, L = 91 ft, $S_{avg} = 0.50\%$, $T_c = 15$ min.
 D.A. #3, L = 230 ft, $S_{avg} = 0.50\%$, $T_c = 22$ min.
 D.A. #4, L = 170 ft, $S_{avg} = 0.50\%$, $T_c = 15$ min.

2.1 Preddeveloped runoff coefficient, "C" -

	Urban Lawns ("C"=0.37)	Pavements ("C"=0.55)	Total Area, ac	Weighted "C" Value
DA#1	2.07 ac	1.25 ac	3.32	0.56
DA#2	0.22	0.01	0.23	0.39
DA#3	0.70	0.19	0.89	0.48
DA#4	0.92	0.75	1.67	0.60
		Site	6.11 ac	

⇒ average preddeveloped "C" = 0.55

2.2 Post developed runoff coefficient -

	Urban Lawns ("C"=0.37)	Pavements ("C"=0.89)	Total Area, ac	Weighted "C" Value
DA#1	1.70 ac	1.62 ac	3.32	0.62
DA#2	0.23	-	0.23	0.57
DA#3	0.35	0.54	0.89	0.67
DA#4	0.64	1.03	1.67	0.69
		Site	6.11 ac	

⇒ average post-developed "C" = 0.64

Post developed Condition

No significant changes anticipated in flow length or discharge point locations

4.0 Summary of Discharge Computations (Rational Method, 100-yr)

Pre-developed Condition ($Q_{100} = C_{100} A$)

DA #1, $Q_{100} = 0.56 \times 5.69 \times 3.22 = 10.53 \text{ cfs}$

DA #2, $Q_{100} = 0.39 \times 7.37 \times 0.23 = 0.64 \text{ cfs}$

DA #3, $Q_{100} = 0.48 \times 6.26 \times 0.31 = 2.67 \text{ cfs}$

DA #4, $Q_{100} = 0.60 \times 7.37 \times 0.67 = 7.38 \text{ cfs}$

Post developed Condition

DA #1, $Q_{100} = 0.62 \times 5.69 \times 3.22 = 11.71 \text{ cfs}$

DA #2, $Q_{100} = 0.37 \times 7.37 \times 0.23 = 0.63 \text{ cfs}$

DA #3, $Q_{100} = 0.67 \times 6.26 \times 0.31 = 3.73 \text{ cfs}$

DA #4, $Q_{100} = 0.69 \times 7.37 \times 0.67 = 8.49 \text{ cfs}$

5.0 Conclusion

Post vs pre developed discharge will not significantly change. Site plan development for lot 1, blk 1 and lot 1, blk 2 should direct stormwater discharge to existing storm sewer inlets along Kansas Ave, 11th St, and hydraulic.


1. Parking areas east of Kansas Ave should store excess flow between pre-developed and post-developed conditions.

2. Parking areas west of Kansas Ave including the proposed church bldg should direct flow to existing storm sewers along Kansas Ave.



6. Appendix



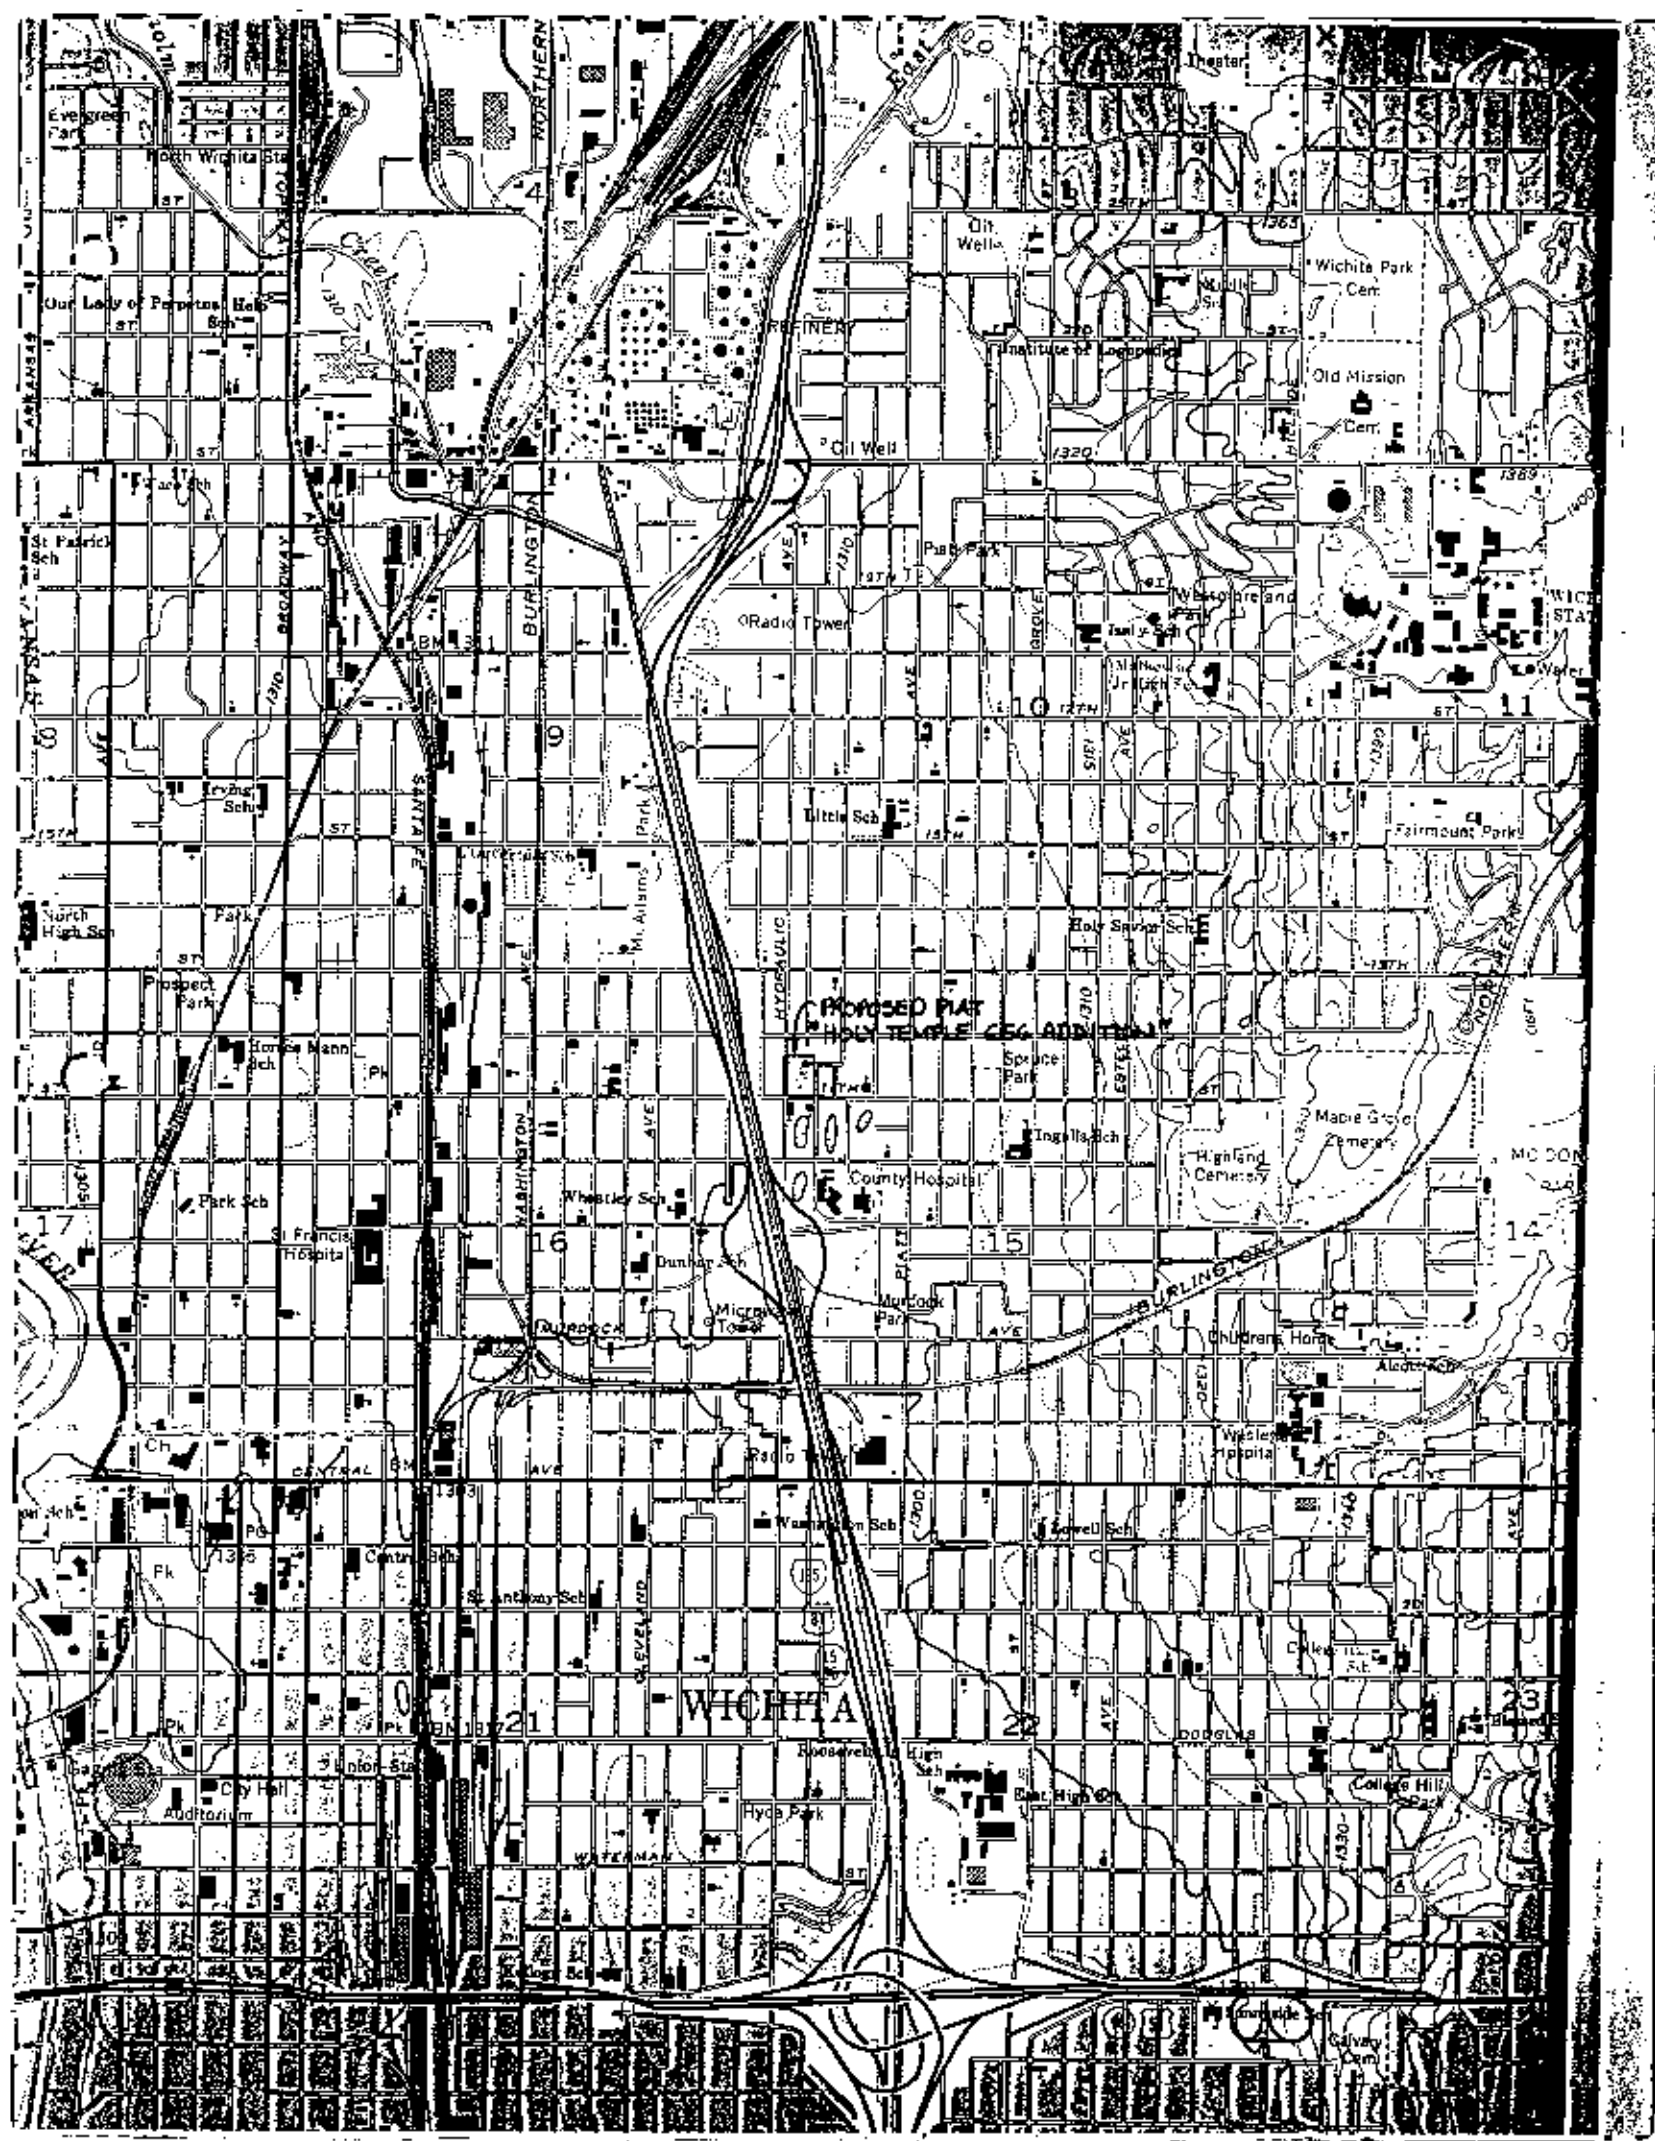

ATTACHMENT D

DRAINAGE CRITERIA

CITY OF WICHITA, KANSAS

RECOMMENDED RUNOFF COEFFICIENTS FOR RATIONAL METHOD
AND PERCENT IMPERVIOUS FOR UNIT HYDROGRAPH METHOD

Land Use or Surface Characteristics	Percent Impervious	Frequency			
		2	5	10	100
1. Business:					
Downtown Areas	95	0.84	0.85	0.87	0.91
Neighborhood Areas	70	0.68	0.69	0.73	0.80
2. Residential:					
<u>Single Family (Soil Group D)</u>					
1/8 Acre	50	0.57	0.61	0.66	0.79
1/4 Acre	38	0.50	0.54	0.62	0.76
1/3 Acre	30	0.46	0.50	0.59	0.73
1/2 Acre	25	0.42	0.48	0.56	0.72
3/4 Acre	22	0.42	0.46	0.55	0.71
1 Acre	20	0.41	0.45	0.54	0.71
<u>Multi-Family (Soil Group D)</u>					
Multi-Unit (detached)	60	0.62	0.66	0.72	0.82
Multi-Unit (attached)	65	0.64	0.68	0.73	0.83
Apartments	75	0.70	0.73	0.79	0.86
<u>Single Family (Soil Group C)</u>					
1/8 Acre	50	0.55	0.58	0.64	0.73
1/4 Acre	38	0.48	0.51	0.57	0.68
1/3 Acre	30	0.43	0.46	0.53	0.65
1/2 Acre	25	0.40	0.43	0.50	0.63
3/4 Acre	22	0.39	0.42	0.49	0.62
1 Acre	20	0.37	0.40	0.48	0.61
<u>Multi-Family (Soil Group C)</u>					
Multi-Unit (detached)	60	0.60	0.63	0.69	0.77
Multi-Unit (attached)	65	0.63	0.66	0.71	0.79
Apartments	75	0.68	0.72	0.77	0.83
<u>Single-Family (Soil Group B)</u>					
1/8 Acre	50	0.52	0.54	0.59	0.67
1/4 Acre	38	0.44	0.46	0.52	0.61
1/3 Acre	30	0.39	0.41	0.47	0.57
1/2 Acre	25	0.36	0.38	0.44	0.54
3/4 Acre	22	0.34	0.36	0.42	0.52
1 Acre	20	0.33	0.35	0.40	0.51
<u>Multi-Family (Soil Group B)</u>					
Multi-Unit (detached)	60	0.58	0.60	0.65	0.72
Multi-Unit (attached)	65	0.61	0.64	0.68	0.75
Apartments	75	0.67	0.70	0.74	0.80


Land Use or Surface Characteristics	Percent Impervious	Frequency			
		2	5	10	100
<u>Single Family (Soil Group A)</u>					
1/8 Acre	50	0.47	0.50	0.54	0.60
1/4 Acre	38	0.39	0.41	0.45	0.52
1/3 Acre	30	0.33	0.35	0.39	0.47
1/2 Acre	25	0.30	0.31	0.35	0.44
3/4 Acre	22	0.28	0.29	0.33	0.42
1 Acre	20	0.26	0.28	0.32	0.40
<u>Multi-Family (Soil Group A)</u>					
Multi-Unit (detached)	60	0.55	0.57	0.61	0.67
Multi-Unit (attached)	65	0.58	0.60	0.64	0.70
Apartments	75	0.65	0.68	0.72	0.77
3. Industrial:					
Light Areas	70	0.68	0.69	0.73	0.80
Heavy Areas	80	0.74	0.76	0.79	0.84
4. Playgrounds:	15	0.33	0.35	0.42	0.55
5. Schools:	40	0.49	0.51	0.56	0.66
6. Railroad Yard Areas:	30	0.43	0.45	0.50	0.62
7. Undeveloped Urban Areas: Offsite Flow Analysis (when land use not defined)	45	0.52	0.54	0.59	0.68
8. Streets:					
Paved	99	0.87	0.88	0.90	0.93
Gravel	00	0.24	0.26	0.33	0.48
9. Drive, Parking Lots and Walks:	96	0.87	0.87	0.88	0.89
10. Roofs:	90	0.80	0.85	0.90	0.93
11. Urban Lawn Areas (See Note No. 1 below):					
<u>Soil Group A</u>					
Slope less than 1%	00	0.08	0.09	0.13	0.23
Slope 1% to 4%	00	0.12	0.13	0.17	0.27
Slope more than 4%	00	0.16	0.17	0.21	0.31
<u>Soil Group B</u>					
Slope less than 1%	00	0.16	0.18	0.24	0.37
Slope 1% to 4%	00	0.20	0.22	0.28	0.41
Slope more than 4%	00	0.24	0.26	0.32	0.45
<u>Soil Group C</u>					
Slope less than 1%	00	0.24	0.27	0.35	0.51
Slope 1% to 4%	00	0.26	0.29	0.37	0.53
Slope more than 4%	00	0.28	0.31	0.39	0.55

Land Use or Surface Characteristics	Percent Impervious	Frequency			
		2	5	10	100
Soil Group D					
Slope less than 1%	00	0.28	0.33	0.43	0.63
Slope 1% to 4%	00	0.30	0.35	0.45	0.65
Slope more than 4%	00	0.32	0.37	0.47	0.67

Note No. 1: Coefficients shown in the above table are for pervious open space areas with thick turf which includes pervious areas in parks and cemeteries. Coefficients shown above must be increased 0.02 for use with agricultural pasture areas. Coefficients shown above must be reduced by 0.04 for use with agricultural cultivated areas. Group A soils are well-drained, coarse textured sands with high infiltration rates. Group B soils are moderately well-drained, moderately coarse textured soils with moderate infiltration rates. Group C soils are moderately poor-drained, moderately fine textured soils with slow infiltration rates. Group D soils are poor-drained, fine textured soils with very slow infiltration rates.

GENERAL NOTE: These Rational Formula Coefficients may not be valid for basins 320 acres or larger.

300 ft. max. sheet flow, after this go with shallow.
see SCS.

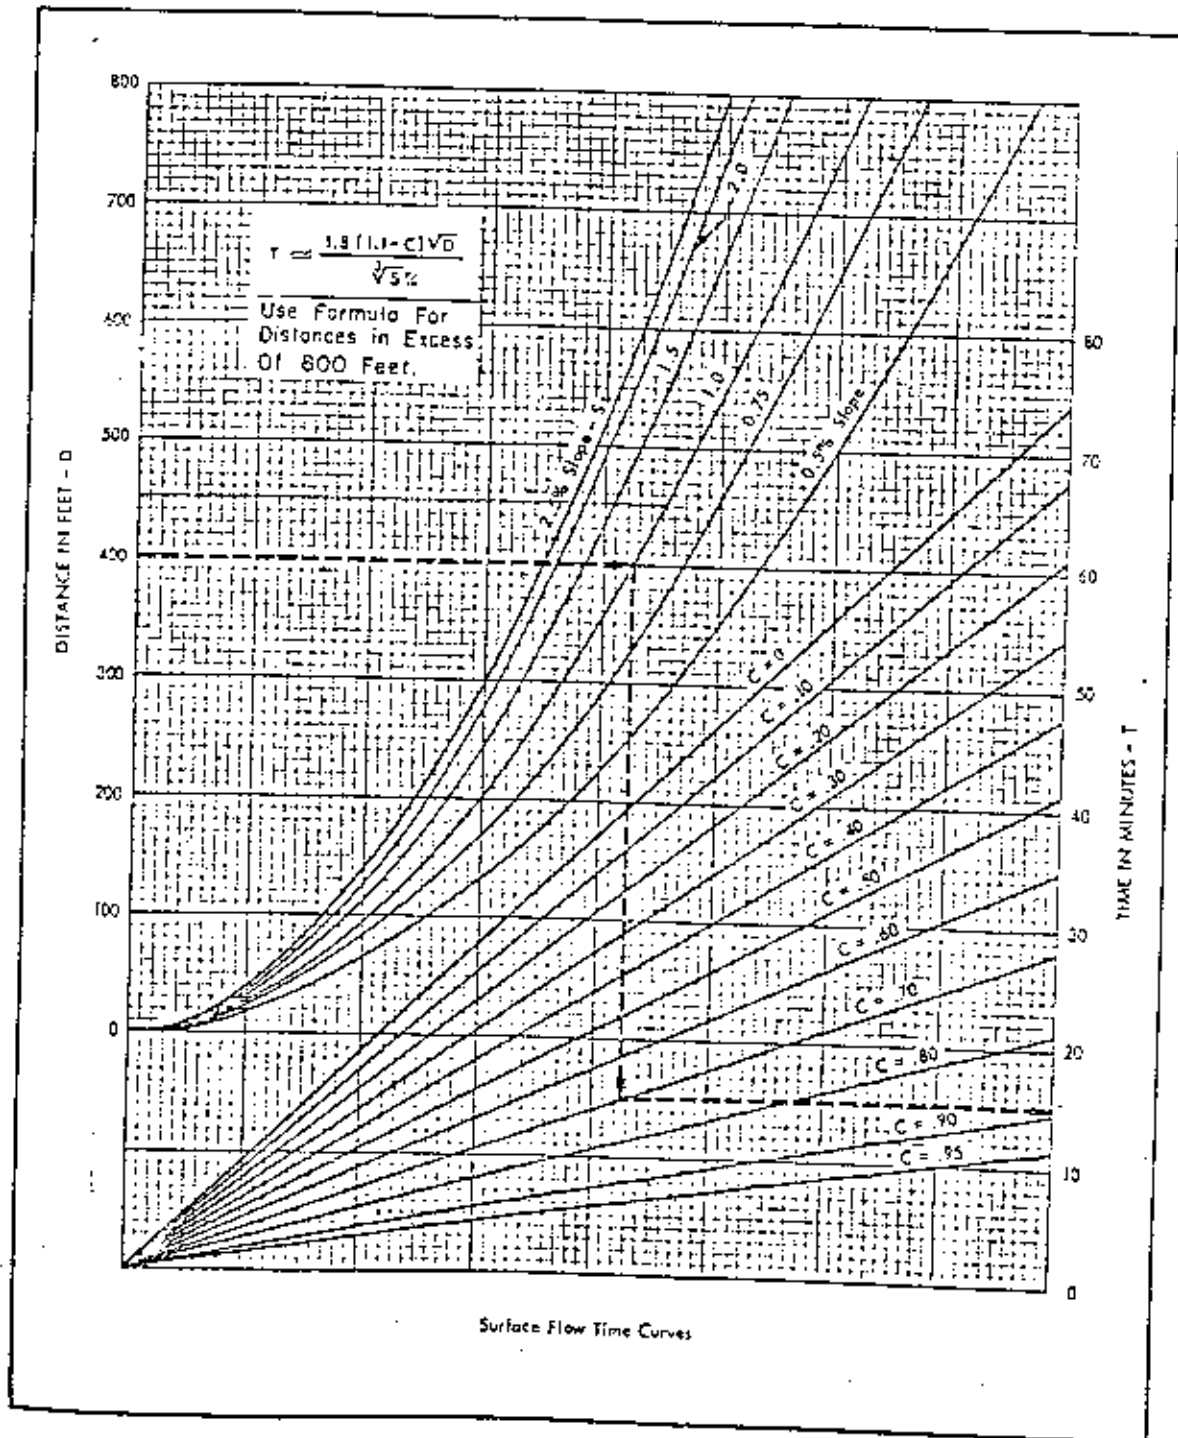

FAA Method
(not good for channel
flow)

SID-PEC 15 minutes min
USE TP-40 for west of Kansas

April 15, 1986

ATTACHMENT A
DRAINAGE CRITERIA MANUAL
CITY OF WICHITA, KANSAS

RAINFALL INTENSITY TABLE FOR SEDGWICK COUNTY, KANSAS

The following tabulation contains rainfall intensity in inches per hour as derived from ESSA Weather Bureau Technical Paper 40 Modified to NWS Hydro-35, 1977 During First Hour

DURATION IN MINUTES	RETURN PERIODS OF						
	1-YR	2-YR	5-YR	10-YR	25-YR	50-YR	100-YR
5	4.18	5.57	6.53	7.41	8.52	9.48	10.32
6	3.99	5.32	6.25	7.09	8.16	9.09	9.89
7	3.81	5.09	5.99	6.81	7.84	8.74	9.50
8	3.66	4.89	5.75	6.55	7.55	8.42	9.15
9	3.52	4.70	5.54	6.31	7.28	8.13	8.83
10	3.39	4.52	5.34	6.09	7.04	7.86	8.54
11	3.27	4.36	5.16	5.89	6.81	7.61	8.27
12	3.18	4.21	4.99	5.71	6.60	7.38	8.02
13	3.05	4.08	4.84	5.53	6.41	7.17	7.79
14	2.96	3.95	4.69	5.37	6.23	6.97	7.57
15	2.87	3.83	4.56	5.22	6.06	6.78	7.37
16	2.78	3.72	4.43	5.08	5.90	6.60	7.18
17	2.71	3.61	4.31	4.95	5.75	6.44	7.00
18	2.63	3.51	4.20	4.83	5.61	6.29	6.84
19	2.56	3.42	4.10	4.71	5.47	6.14	6.68
20	2.50	3.33	4.00	4.60	5.35	6.00	6.53
21	2.44	3.25	3.90	4.50	5.23	5.87	6.39
22	2.38	3.17	3.81	4.40	5.12	5.75	6.26
23	2.32	3.10	3.73	4.31	5.01	5.63	6.13
24	2.27	3.03	3.65	4.22	4.91	5.52	6.01
25	2.22	2.96	3.57	4.13	4.81	5.41	5.90
26	2.20	2.90	3.50	4.05	4.72	5.31	5.79
27	2.16	2.84	3.43	3.98	4.63	5.21	5.69
28	2.14	2.78	3.37	3.90	4.55	5.12	5.59
29	2.11	2.72	3.30	3.83	4.47	5.03	5.49
30	2.08	2.67	3.24	3.76	4.39	4.94	5.40
31	2.05	2.62	3.19	3.70	4.32	4.86	5.32
32	2.02	2.57	3.10	3.63	4.25	4.79	5.22
33	1.99	2.52	3.05	3.57	4.18	4.71	5.14
34	1.96	2.48	3.01	3.51	4.11	4.63	5.07
35	1.93	2.44	2.98	3.46	4.05	4.56	5.00
36	1.91	2.39	2.93	3.41	3.99	4.50	4.93
37	1.89	2.35	2.88	3.36	3.93	4.43	4.86
38	1.87	2.32	2.84	3.31	3.87	4.37	4.79
39	1.85	2.28	2.80	3.26	3.82	4.31	4.73
40	1.83	2.24	2.76	3.22	3.76	4.25	4.66
41	1.81	2.21	2.72	3.17	3.71	4.19	4.60
42	1.79	2.18	2.68	3.13	3.66	4.13	4.54
43	1.77	2.14	2.64	3.09	3.61	4.08	4.49
44	1.75	2.11	2.61	3.05	3.57	4.03	4.43
45	1.73	2.08	2.57	3.01	3.52	3.98	4.38

C.O.M.
minutes
duration