

POND GRADING
SEE SHEET NO. 7

POND GRADING
SEE SHEET NO. 8

POND GRADING
SEE SHEET NO. 9

POND GRADING
SEE SHEET NO. 10

LEGEND
 — PROPOSED CONTOUR
 - - - EXISTING CONTOUR
 CONTOUR INTERVAL: 1 FOOT

SITE GRADING NOTES

THE CONTRACTOR SHALL USE EXCESS EXCAVATED MATERIAL FROM OAK CREEK, BLOCK 2, LOT 4 FOR THIS PROJECT TO GRADE LOTS WITHIN GLEN MEADOW 2ND ADDITION. SEE SHEET NO. .

ALL FILL PLACED AS PART OF SITE GRADING SHALL BE COMPACTED TO 90% STD. DENSITY REQUIREMENTS.


ALL FILL MATERIAL SHALL BE BLADED SMOOTH AND SLOPED TO DRAIN.

NO WASTE MATERIAL SHALL BE PLACED IN ANY STREET RIGHT-OF-WAY OTHER THAN AS NECESSARY FOR STREET CONSTRUCTION AS SHOWN IN THESE PLANS.

THE LUMP SUM BID ITEM "MASS GRADING" SHALL INCLUDE PLACING, GRADING, AND COMPACTING OF SOIL MATERIAL TO THE REQUIREMENTS OF THIS GRADING PLAN; AND FOR ALL EQUIPMENT, LABOR, TOOLS, AND INCIDENTALS NECESSARY TO COMPLETE THE WORK.

THE ACTUAL EXCAVATION OF MATERIAL FOR SITE GRADING IS INCLUDED IN THE BID ITEM "UNCLASSIFIED EXCAVATION".

SEE PRIVATE PAVING IMPROVEMENTS PLANS FOR ADDITIONAL GRADING REQUIREMENTS.
 PEC PROJECT NO. 35-13368-000-0042
 PRIVATE PROJECT NO. --- PPP (607679)

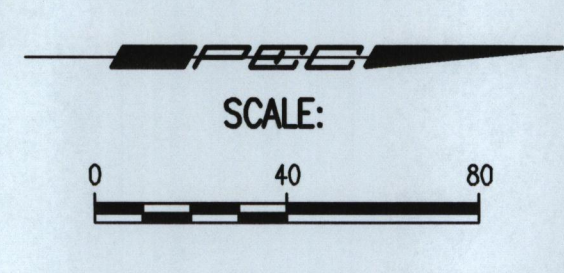

No.	Revision	By	Date
GLEN MEADOWS 2ND ADDITION STORM WATER DRAIN NO. 359 SITE GRADING PLAN GARY JANZEN, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 468-84634			
APEC PROFESSIONAL ENGINEERING CONSULTANTS, P.A. 303 SOUTH TOPEKA WICHITA, KS 67202 316-262-2801 www.apec.com			
Designed by	BMM	Job No.	35-13368-002
Drawn by	BJS	Date	September 2013
		Sheets	06 of 06