


HYDROLOGIC GROUP RATING FOR BUTLER COUNTY, KANSAS; SEDGWICK COUNTY, KANSAS

Andover Elementary School Addition



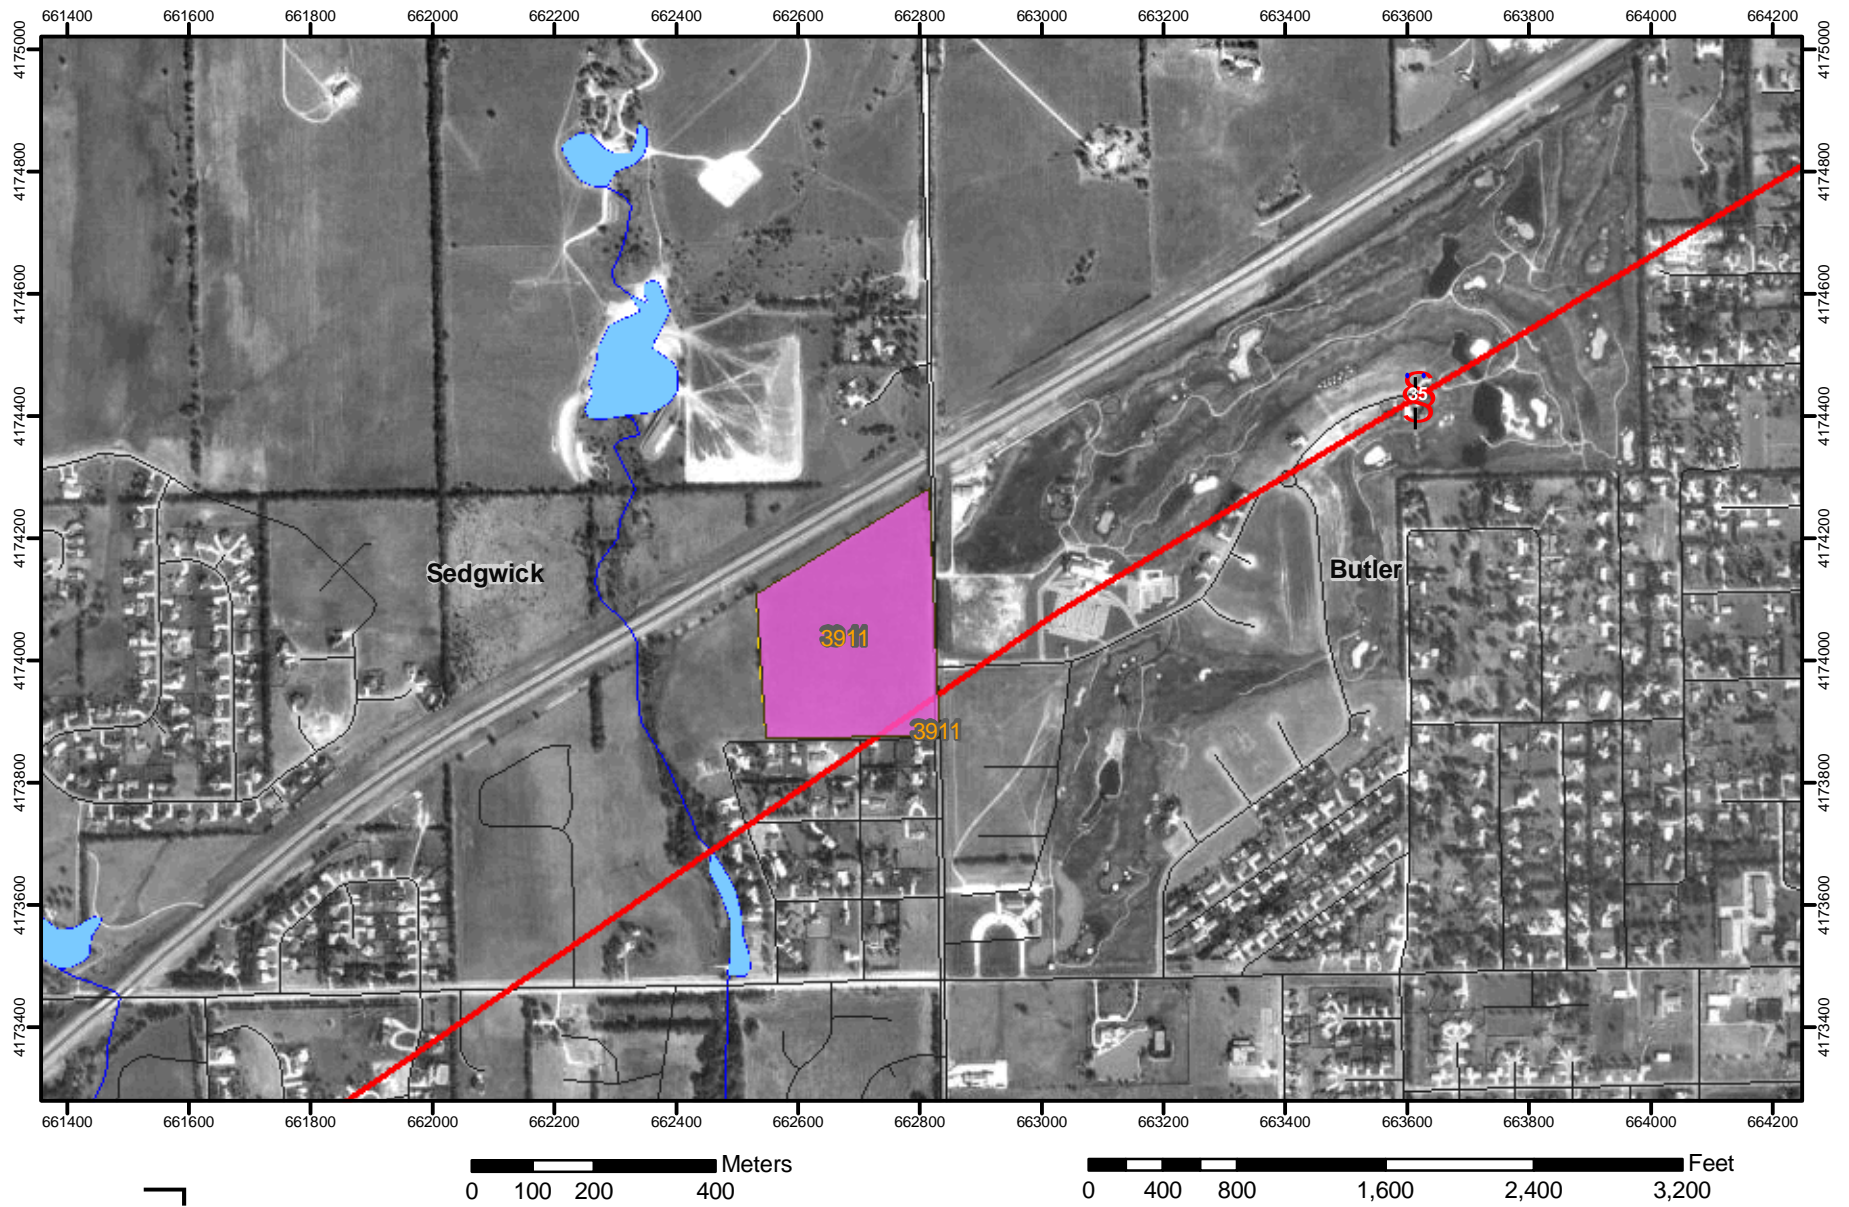
















HYDROLOGIC GROUP RATING FOR BUTLER COUNTY, KANSAS; SEDGWICK COUNTY, KANSAS

Andover Elementnary School Addition

MAP LEGEND

Hydrologic Group

{Dominant Condition, <};

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available
-  Soil Map Units
-  Cities
-  Detailed Counties
-  Interstate Highways
-  Roads
-  Rails
-  Water
-  Hydrography
-  Oceans

MAP INFORMATION

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>

Coordinate System: UTM Zone 14

Soil Survey Area: Butler County, Kansas
Spatial Version of Data: 1
Soil Map Compilation Scale: 1:24000

Soil Survey Area: Sedgwick County, Kansas
Spatial Version of Data: 1
Soil Map Compilation Scale: 1:24000

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Tables - Hydrologic Group

Summary by Map Unit - Butler County, Kansas

Soil Survey Area Map Unit Symbol	Map Unit Name	Rating	Total Acres in AOI	Percent of AOI
3911	Rosehill silty clay, 1 to 3 percent slopes	D	0.0	0.0

Summary by Map Unit - Sedgwick County, Kansas

Soil Survey Area Map Unit Symbol	Map Unit Name	Rating	Total Acres in AOI	Percent of AOI
3911	Rosehill silty clay, 1 to 3 percent slopes	D	23.0	100.0

Description - Hydrologic Group

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are placed into four groups A, B, C, and D, and three dual classes, A/D, B/D, and C/D. Definitions of the classes are as follows:

The four hydrologic soil groups are:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only soils that are rated D in their natural condition are assigned to dual classes.

Parameter Summary - Hydrologic Group

Aggregation Method: Dominant Condition

Aggregation is the process by which a set of component attribute values is reduced to a single value that represents the map unit as a whole.

A map unit is typically composed of one or more "components". A component is either some type of soil or some nonsoil entity, e.g., rock outcrop. For the attribute being aggregated, the first step of the aggregation process is to derive one attribute value for each of a map unit's components. From this set of component attributes, the next step of the aggregation process derives a single value that represents the map unit as a whole. Once a single value for each map unit is derived, a thematic map for soil map units can be rendered. Aggregation must be done because, on any soil map, map units are delineated but components are not.

For each of a map unit's components, a corresponding percent composition is recorded. A percent composition of 60 indicates that the corresponding component typically makes up approximately 60% of the map unit. Percent composition is a critical factor in some, but not all, aggregation methods.

The aggregation method "Dominant Condition" first groups like attribute values for the components in a map unit. For each group, percent composition is set to the sum of the percent composition of all components participating in that group. These groups now represent "conditions" rather than components. The attribute value associated with the group with the highest cumulative percent composition is returned. If more than one group shares the highest cumulative percent composition, the corresponding "tie-break" rule determines which value should be returned. The "tie-break" rule indicates whether the lower or higher group value should be returned in the case of a percent composition tie.

The result returned by this aggregation method represents the dominant condition throughout the map unit only when no tie has occurred.

Component Percent Cutoff:

Components whose percent composition is below the cutoff value will not be considered. If no cutoff value is specified, all components in the database will be considered. The data for some contrasting soils of minor extent may not be in the database, and therefore are not considered.

Tie-break Rule: Lower

The tie-break rule indicates which value should be selected from a set of multiple candidate values, or which value should be selected in the event of a percent composition tie.