FIELDCREST CIRCLE

N. L. PARKDALE TO & INCL CUL-DE-SAC

PROJ No. 472-76-245-80527 000-000-001

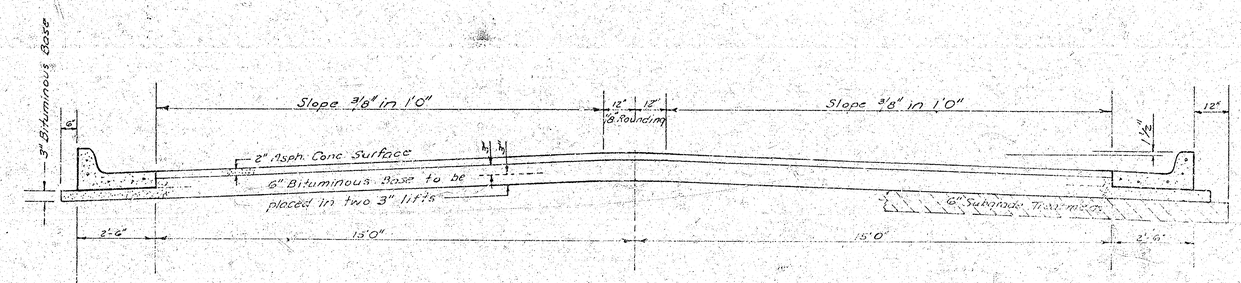

TYPICAL SECTION

35' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE 0.05 GALLONS PER SQ YD BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND PLACED SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE IN THE TOP LIFT.

The A.C. Pavement between the comb. Curb & gutter shall be paid as Sq.Yds. 3" A.C. Pavement (w/Bituminous Base). The Bituminous Base under the comb. Curb & gutter shall be paid as Sq.Yds. 3" Bituminous Base.

COMBINED CURB & GUTTER

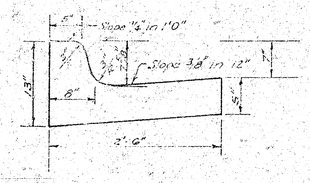

ROLL TYPE CURB & GUTTER

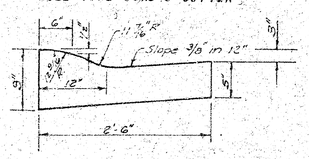

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS



TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

STEVEN R. LAMB 7714 REGISTERED ENGINEER

CITY OF WICHITA KANSAS

DEPARTMENT of PUBLIC WORKS - Engineering Division.

R.W. LINN CITY ENGINEER

DATE _____

1/3

1/2

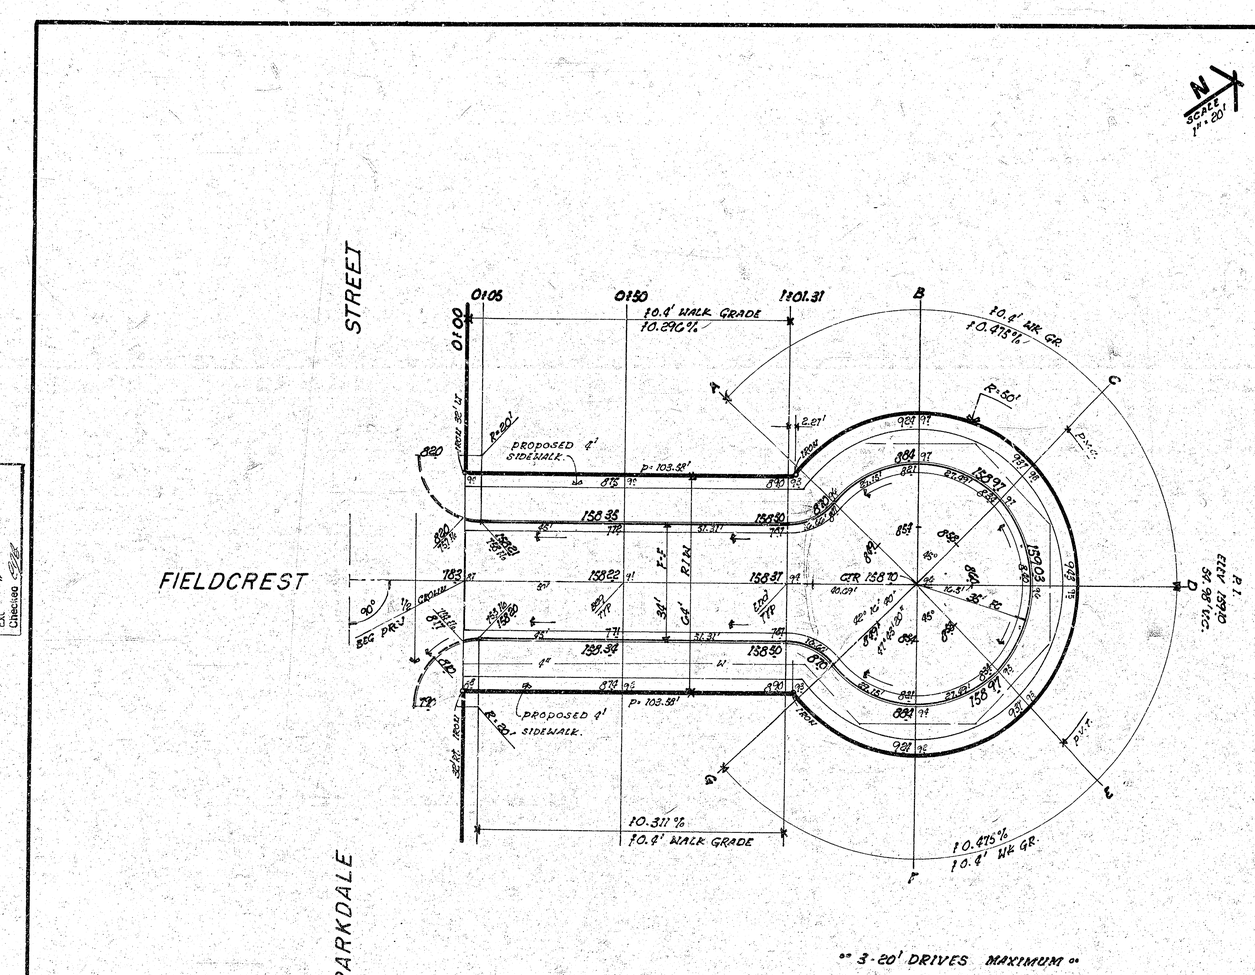

** 3-20' DRIVES MAXIMUM **

Surveyed ARMOUR 5th JLA '63
Plan W. E. E.
Est.
Checked

SUB-GRADE

TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.

NOTE TO FIELD ENGINEER OR CONTRACTOR
Grade perfect connection for future sidewalks. Compact fill at sidewalk areas TO BE CONSTRUCTED BY "OTHERS".

** EXCAVATION **

611.1 cubic yards
+10% 61.1 " "
Total 672.2 cubic yards

905 SQ YARDS MANIPULATION

FIELDCREST CIRCLE

N.L. PARKDALE To & INCL CUL-DE-SAC.

CITY of WICHITA, KANSAS

(34' F-F) 2" ASPH CONC WEARING SURFACE
6" BITUMINOUS BASE & COMB CB & GUTTER

R. W. LINN CITY ENGINEER

DATE _____

PROJ No. 472-K-245-80527000-000-001

2/3

2 1/2