


3. In 97.005 U. S. G. S. Standard SW 21st Meridian.

Base = S. Richmond Ave.

SCALE 1" = 20'

NOTE:  
Contractor to construct dirt  
and sand truck - up.  
City to install pipe in gutter.

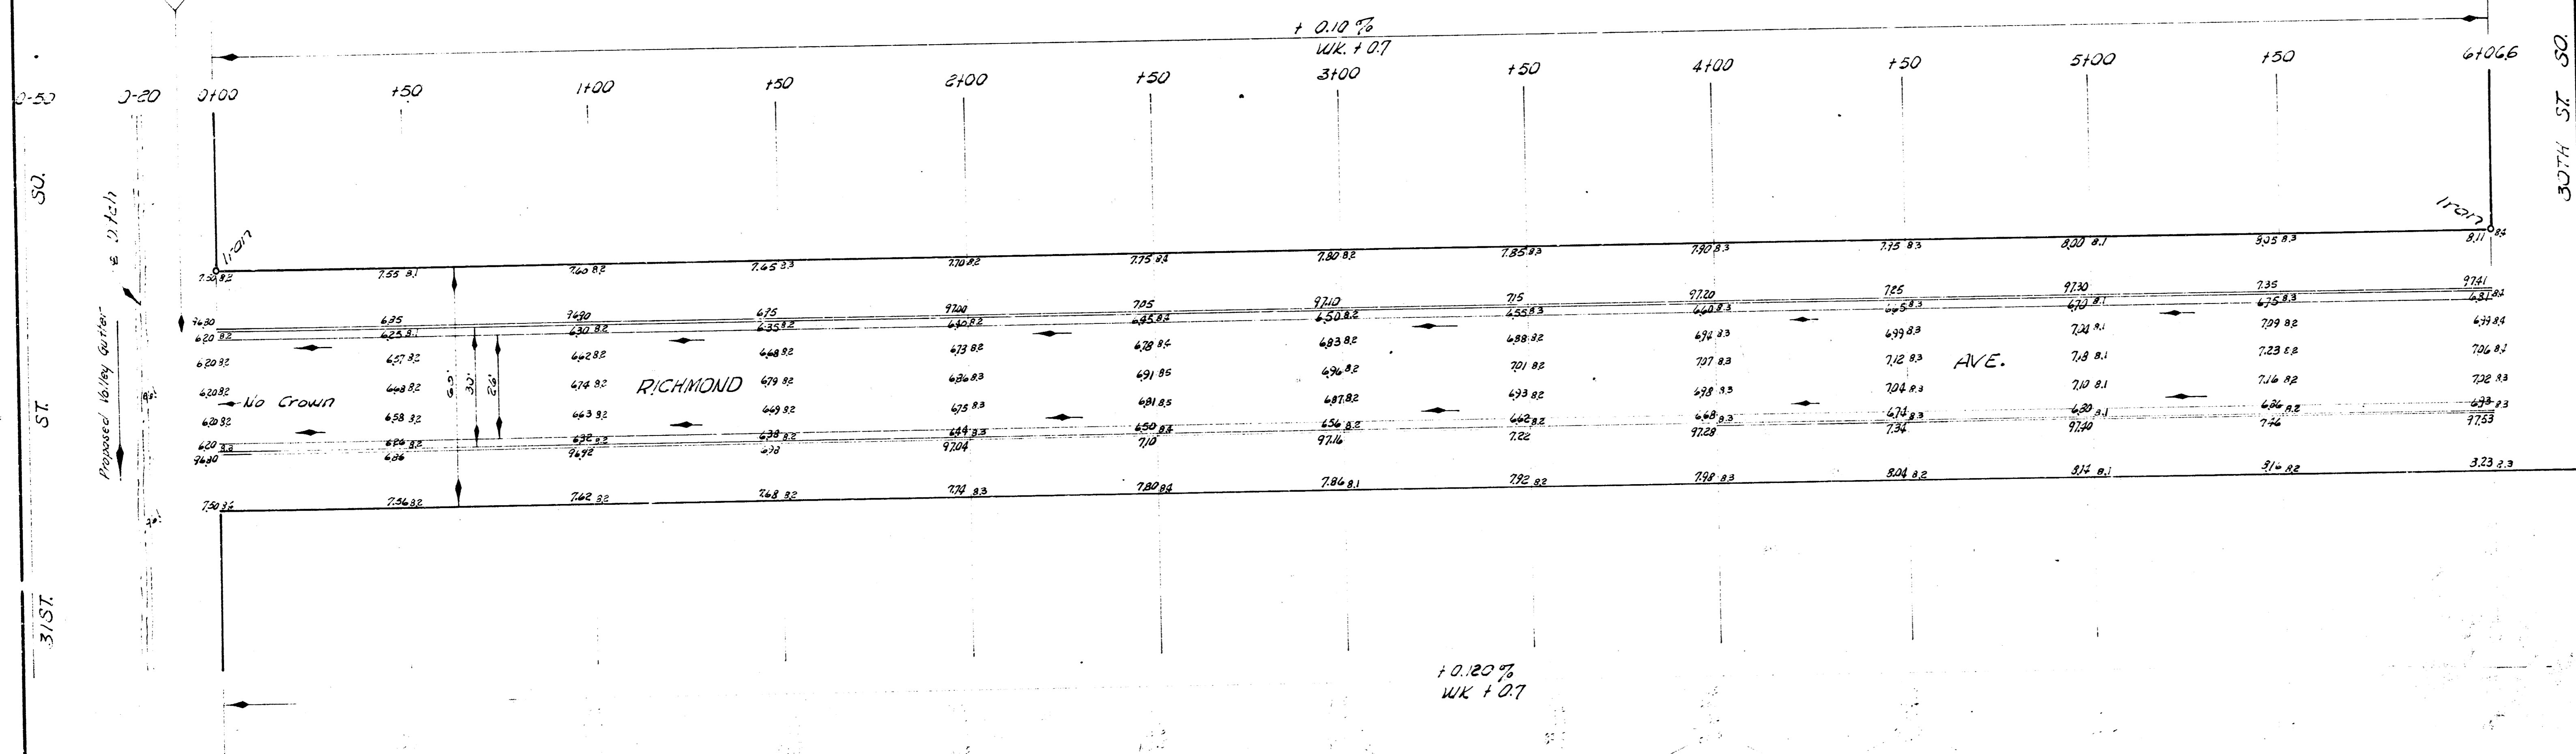

EARTH WORK  
Excavation  
2743.7 Cu Yds.


ESTIMATE OF QUANTITIES			
QUANTITY	UNIT	ITEM	FINAL
2913.9	Sq. Yds.	Asph. Conc.	
1934.2	Lin. Ft.	Comb. cb & gfr.	
289	Sq. Yds.	7" Conc.	
1240	Sq. Ft.	Valley gfr.	
	Sq. Ft.	6" Drive	
9130	Lbs.	Reinf. Steel	
2743.7	Cu. Yds.	Excavation	

NOTES TO CONTRACTOR:  
This estimate was prepared under  
the supervision of the City Engineer  
and is subject to the conditions  
of the City of Wichita, Kansas  
Standard Specifications for the City of  
Wichita for the construction of Streets  
and Alleys.



RICHMOND AVE.  
NW 31st St. to SW Southgate St.  
26-2-30 A.C.  
CITY OF WICHITA, KANSAS  
B. E. SMITH CITY ENGINEER  
PRIVATE CONTRACT

SCALE 1"=20'

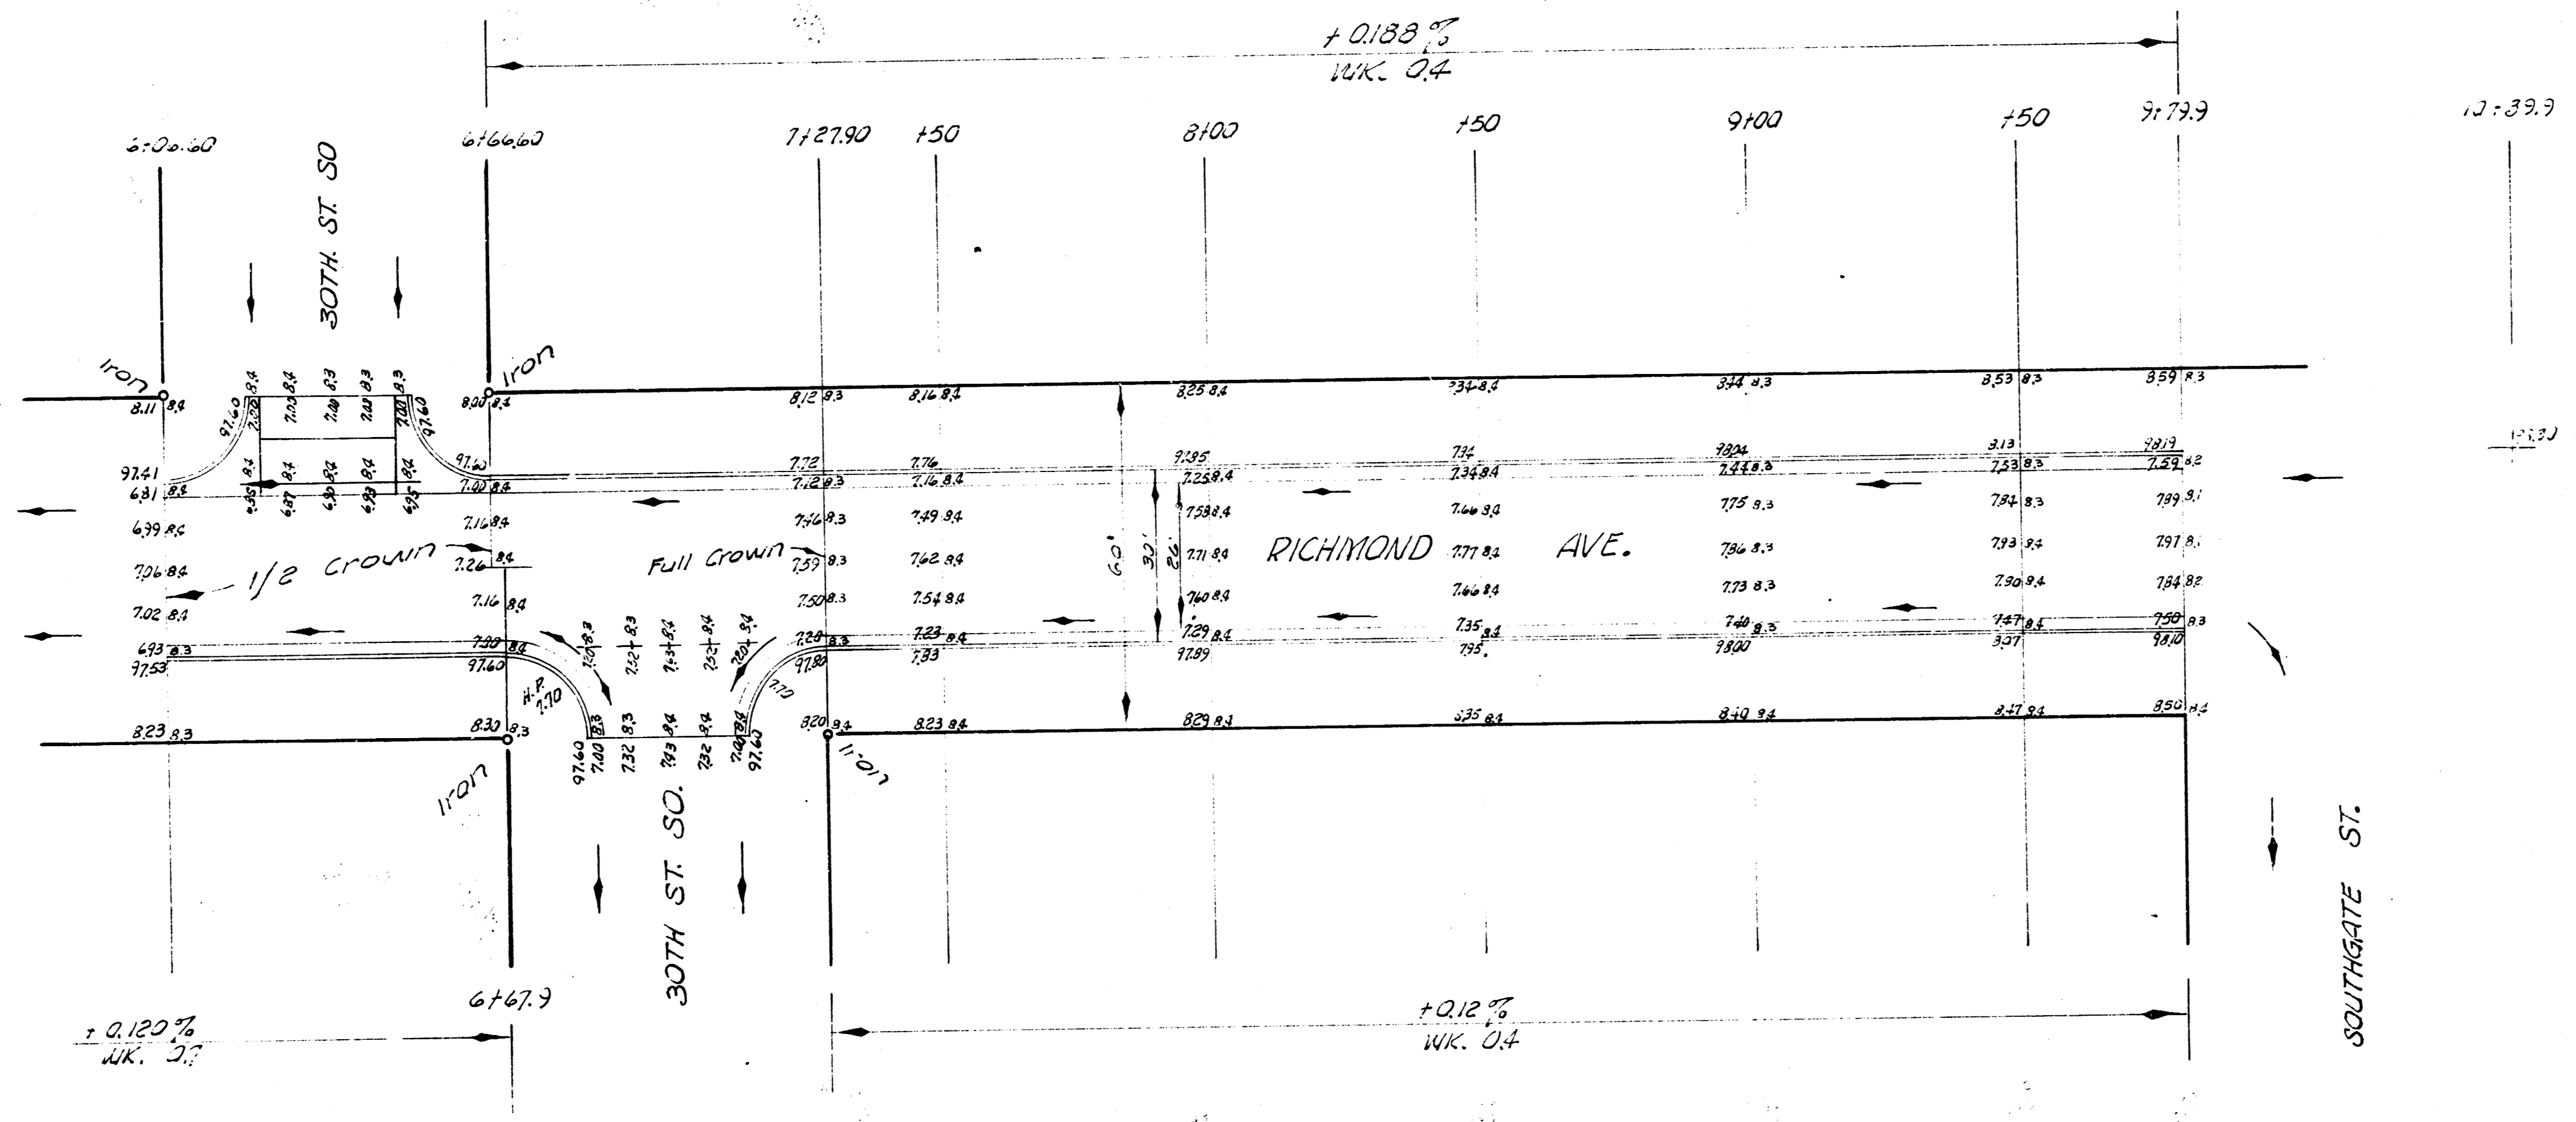

RICHMOND AVE.  
30TH ST. SO. TO SOUTHGATE

2/2

PRIVATE CONTRACT