
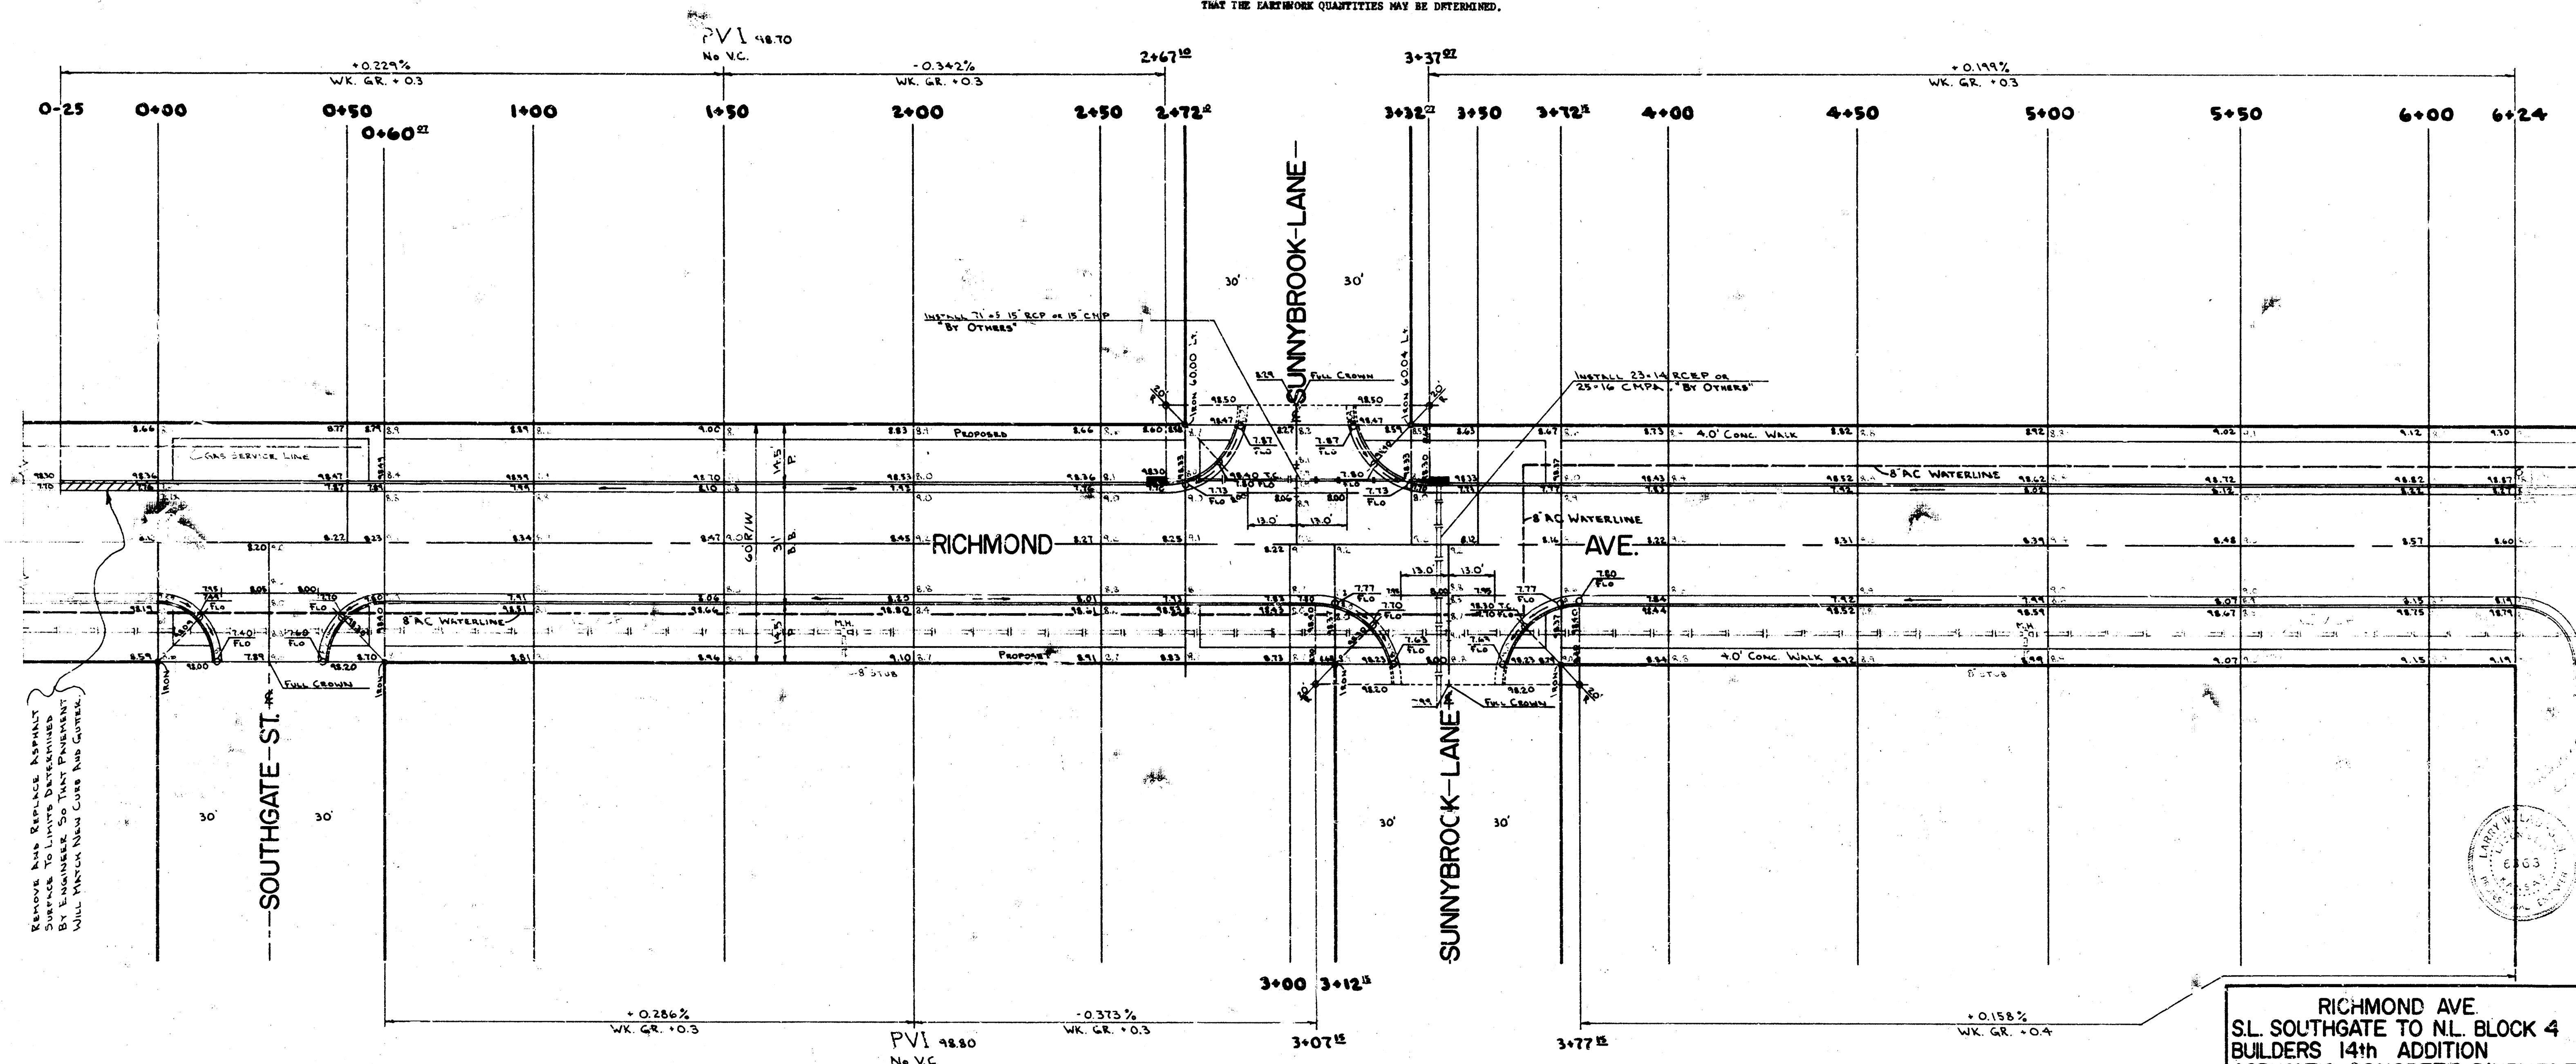


BASELINE = EAST LINE RICHMOND AVE.

B.M. 58.80 RR SPIKE NW. SIDE WOOD STREET LIVE POLE ON S.E. COR. RICHMOND & SOUTHWATE
B.M. 52.10 "X" ON E. END OF G.E. CURB RETURN, S.E. COR. 30th & Gordon

NOTE: CONTRACTOR TO CLEAR RIGHT-OF-WAY, GRADE PARKINGS, AND CONSTRUCT COMPACTED FILL WHERE NECESSARY FOR PROPOSED SIDEWALK. SIDEWALK TO BE CONSTRUCTED BY OTHERS. FIELD ENGINEER IS TO DETERMINE THE TYPE OF SUBGRADE TREATMENT WHICH IS TO BE USED. SIDEWALK TREATMENT MAY CONSIST OF LIME TREATED SUBGRADE, CEMENT TREATED SUBGRADE, RE-COMPACTION OF EXISTING SUBGRADE MATERIAL AS SPECIFIED IN STANDARD SPECIFICATIONS, OR ANY COMBINATION OF THESE. CONTRACTOR TO GRADE SUNNYBROOK ON THE WEST SIDE OF RICHMOND TO MATCH REM. PAVEMENT AS DETERMINED BY ENGINEER. CONTRACTOR TO GRADE SOUTHWATE AND SUNNYBROOK ON THE EAST SIDE OF RICHMOND TO MATCH REM. PAVEMENT AND SO THAT WATER WILL DRAIN FROM PAVEMENT TO DITCH ALONG THE WEST SIDE OF MEDIAN AS DETERMINED BY THE ENGINEER. FIELD ENGINEER TO TAKE CROSS-SECTIONS AS NECESSARY ON THESE SIDEWALKS SO THAT THE EARTHWORK QUANTITIES MAY BE DETERMINED.

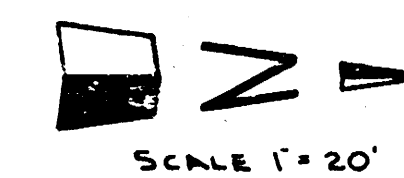

REMOVE AND REGRADE ASPHALT TO EXISTING GRADE BY ENGINEER SO THAT PAVEMENT WILL MATCH REM. CURB AND GUTTER.

SUNNYBROOK
PLAN SHEET
R. W. LINN
CHECKED

■ DENOTES 2'-5" STD. INLET "BY OTHERS"

~EARTHWORK~

Excavation Prop	824.3	Cu. Yds.	Excavation City	225.2	Cu. Yds.
+10%	82.4	Cu. Yds.	+10%	22.5	Cu. Yds.
TOTAL	906.7	Cu. Yds.	TOTAL	247.7	Cu. Yds.

NOTE: ESTIMATED 350 Cu. Yds. Excavation FOR EARTHWORK ON SIDEWALKS

RICHMOND AVE
S.L. SOUTHWATE TO N.L. BLOCK 4
BUILDERS 14th ADDITION
ASPHALTIC CONCRETE PAVEMENT
3' B-B WITH COMB. CB. & GTR.
CITY OF WICHITA, KANSAS
R. W. LINN CITY ENGINEER
PROJ. NO. DAKS 569056
DATE: Dec. 1973

1/3