Survey Kraus Bk/Pg #39
Plat J.L.A.
Ckc "
Checked

B.M. 118.10 "C" in Construction, top curb at S. end of Radius, S.E. 17th. & Mathewson.

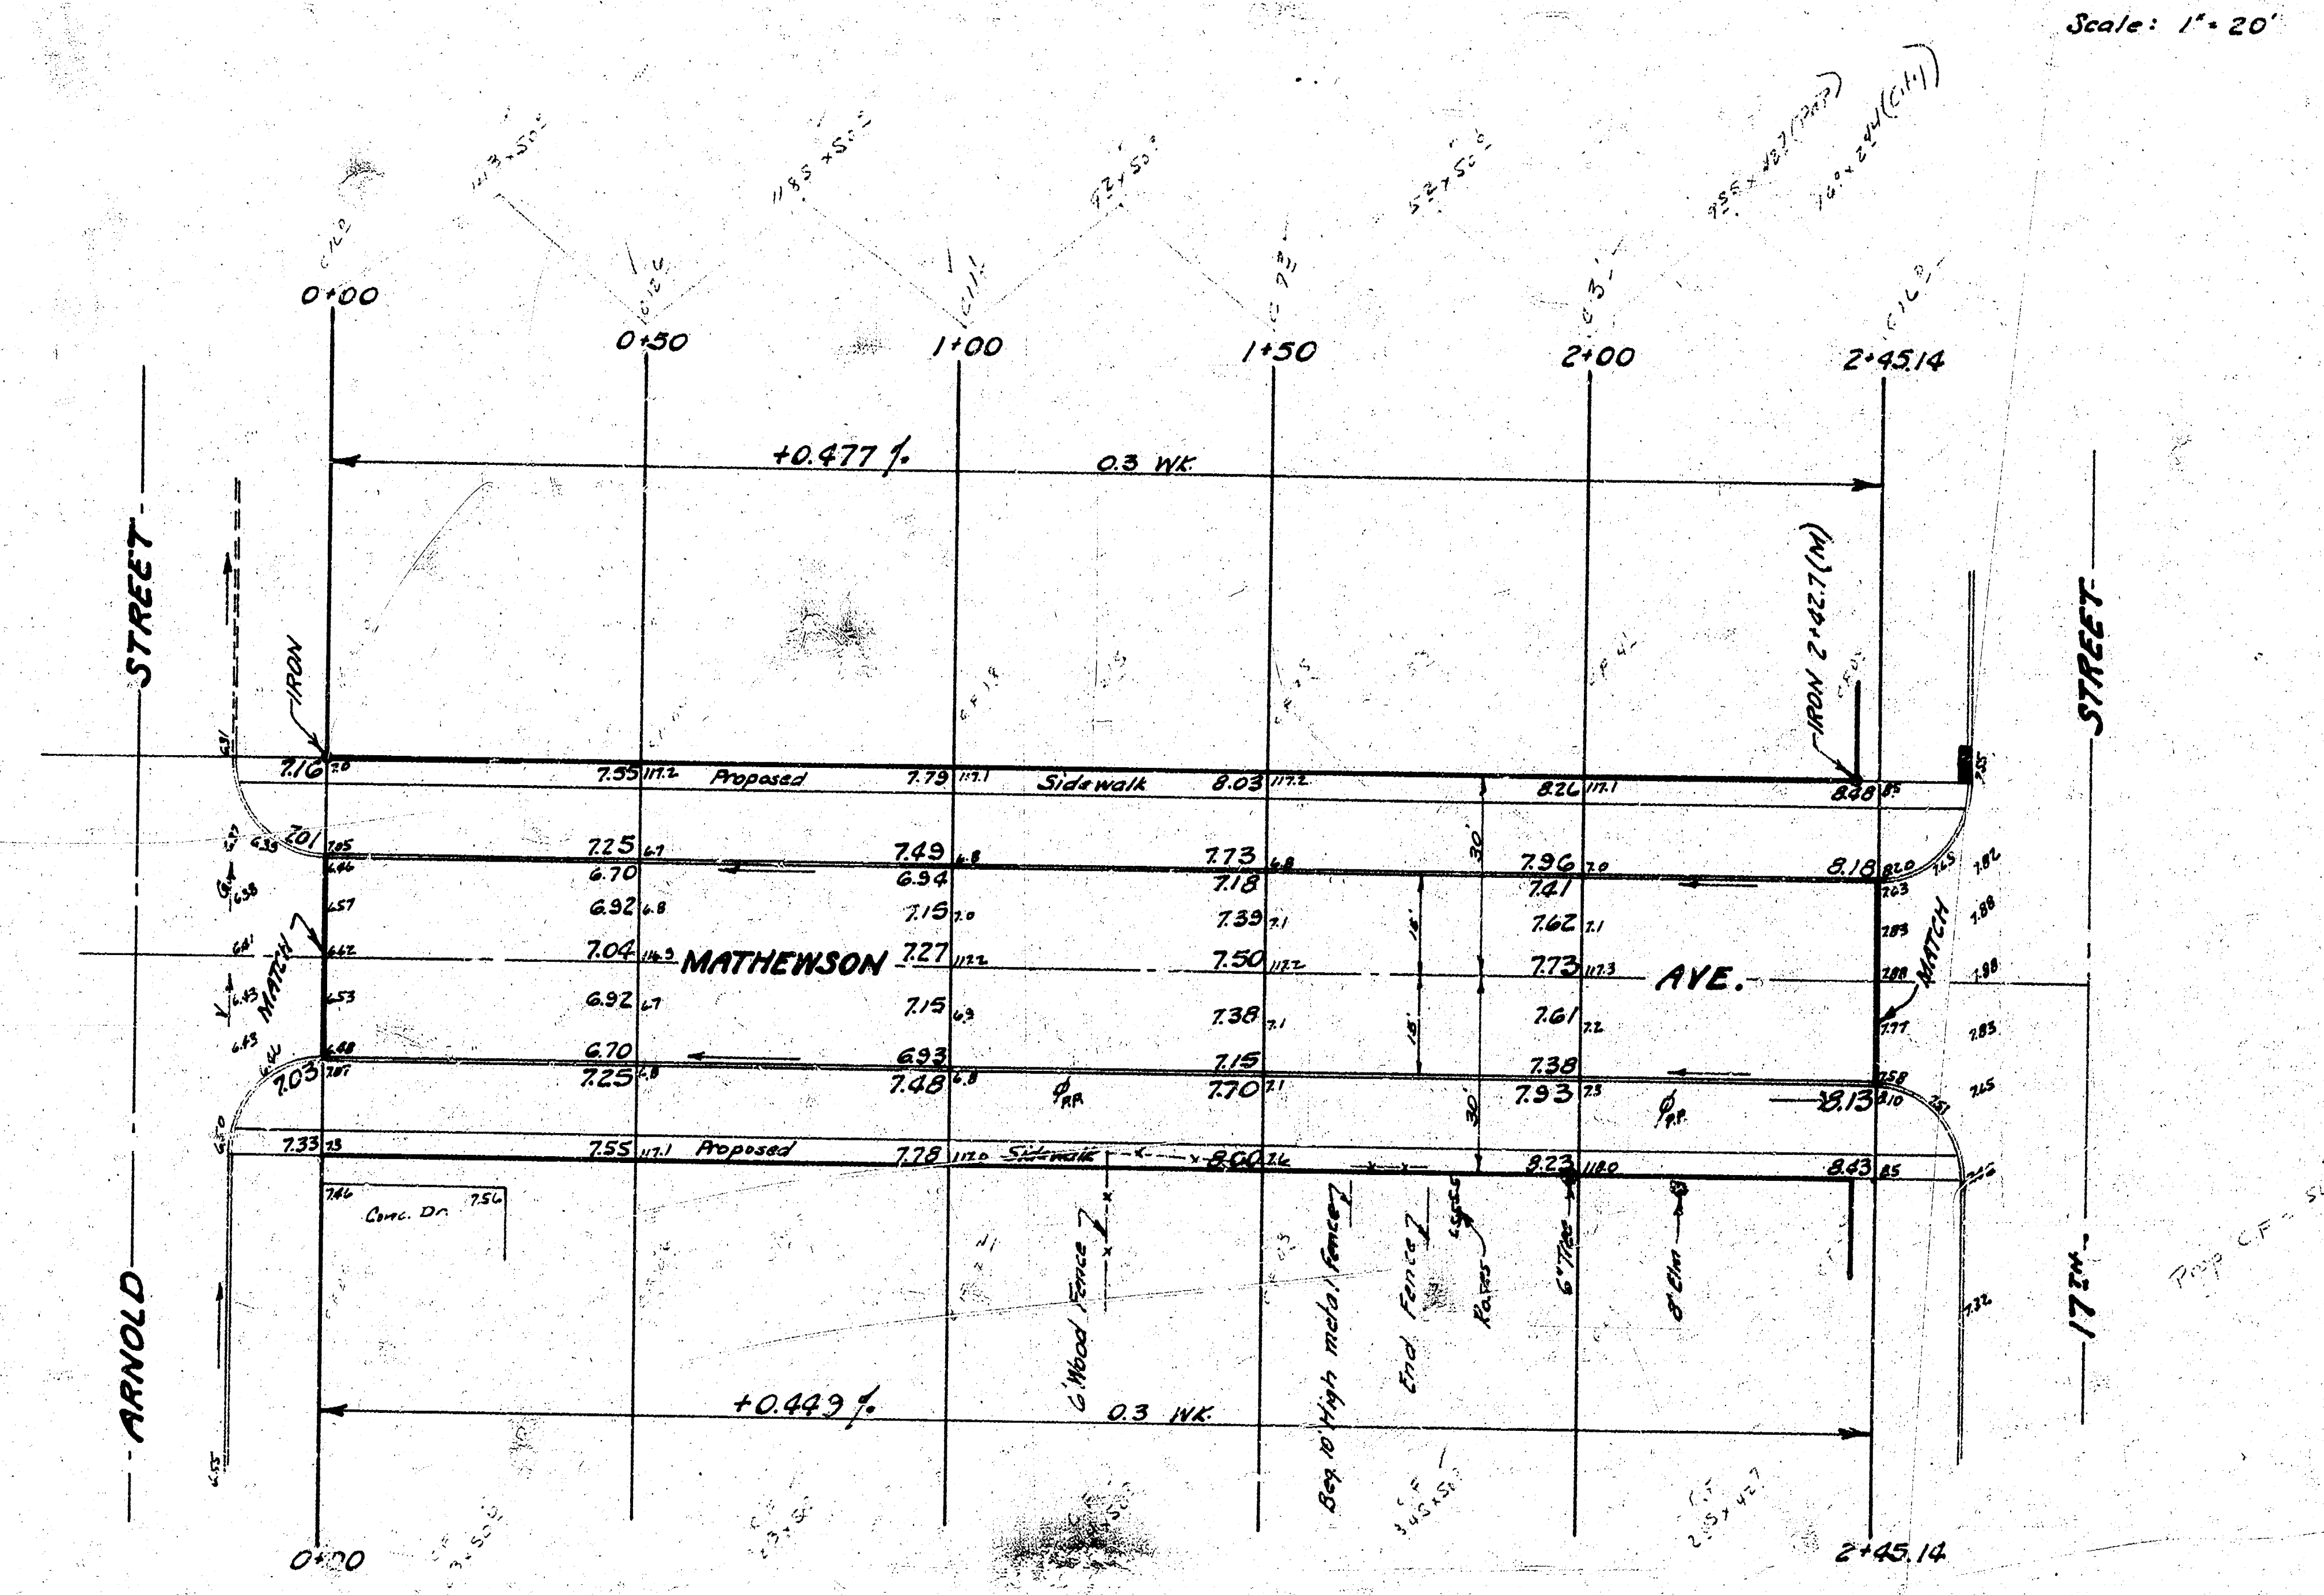
N
Scale: 1" = 20'
0+00
0+50
1+00
1+50
2+00
2+45.14
+0.477%
0.3 WK.
ARNOLD STREET
17TH STREET
MATHEWSON AVE.
IRON
IRON 2+42.7 (M)
Proposed Sidewalk
MATCH
Conc. Dr.
Wood Fence
Beg. 10' High metal Fence
End Fence
+0.449%
0.3 WK.

Prop C = 24353 ÷ 27 = 90± Cu Yds Exc
City C = 35? ÷ 27 = 1± Cu Yds Exc

NOTE:

Contractor to clear right-of-way, grade parkings and compact fill for proposed sidewalk. Sidewalk to be constructed by others.

EXCAVATION

	PROPERTY	CITY
	90 Cu.Yds.	2 Cu.Yds.
+10 %	9 " "	
Totals	99 Cu.Yds.	2 Cu.Yds.

COMP. FILL

PROPERTY	
21 Cu.Yds.	
2 " "	
23 Cu.Yds.	
145 " "	S.G.M.
168 Cu.Yds.	

R. W. LINN 3534
JAMES H. TANDY 2012
JOHN L. ALLEN 821
B. E. SMITH 436

MATHEWSON AVENUE
FROM N.L. ARNOLD STREET
to S.L. 17TH. STREET
30' Conc. & Int. Curb
B.E. SMITH CITY ENGINEER
CITY OF WICHITA KANSAS
Date: May 1969
Project No. C18-122

11 4 3 ⑮