
Mc COMAS AVENUE


SL. BOUNOUS STREET TO SL. HARRY STREET

B.E. SMITH CITY ENGINEER CITY OF WICHITA, KANSAS


PROJECT NO. C19-6

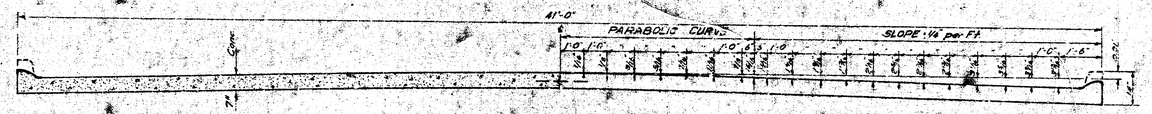


TYPICAL SECTION
NO SCALE

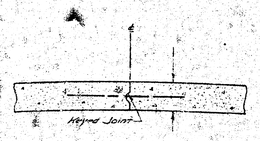


DETAIL OF KEYED JOINT
NO SCALE

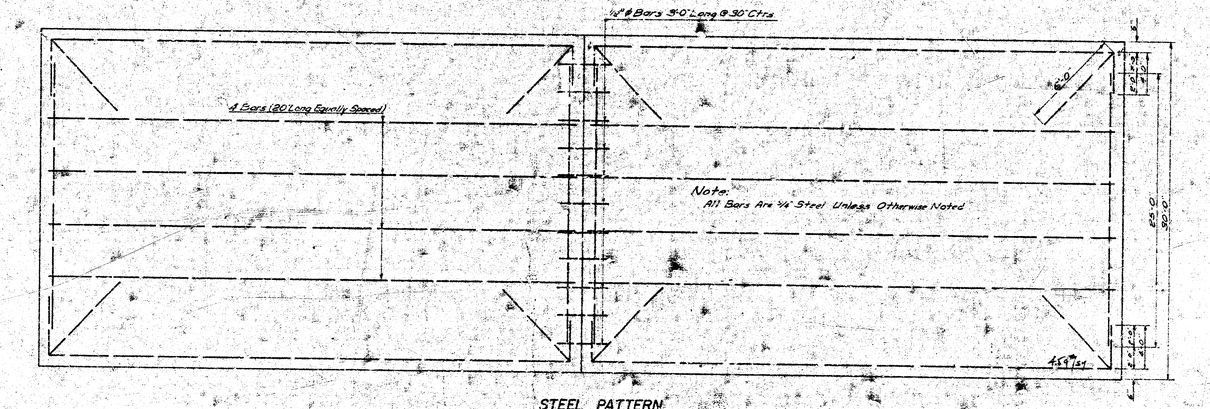

STEEL PATTERN
NO SCALE




DETAIL OF CONTRACTION JOINT
NO SCALE

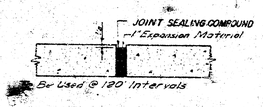

DETAIL OF EXPANSION JOINT
NO SCALE

1/8

BM 111.03 "R" in Richie W End S. Radius SW Radius Harry & West
BM 111.04 "+" Top S Curb of Harry, 120' W of W Radius Harry & McComas
Base Line is E. Property Line of McComas Ave.

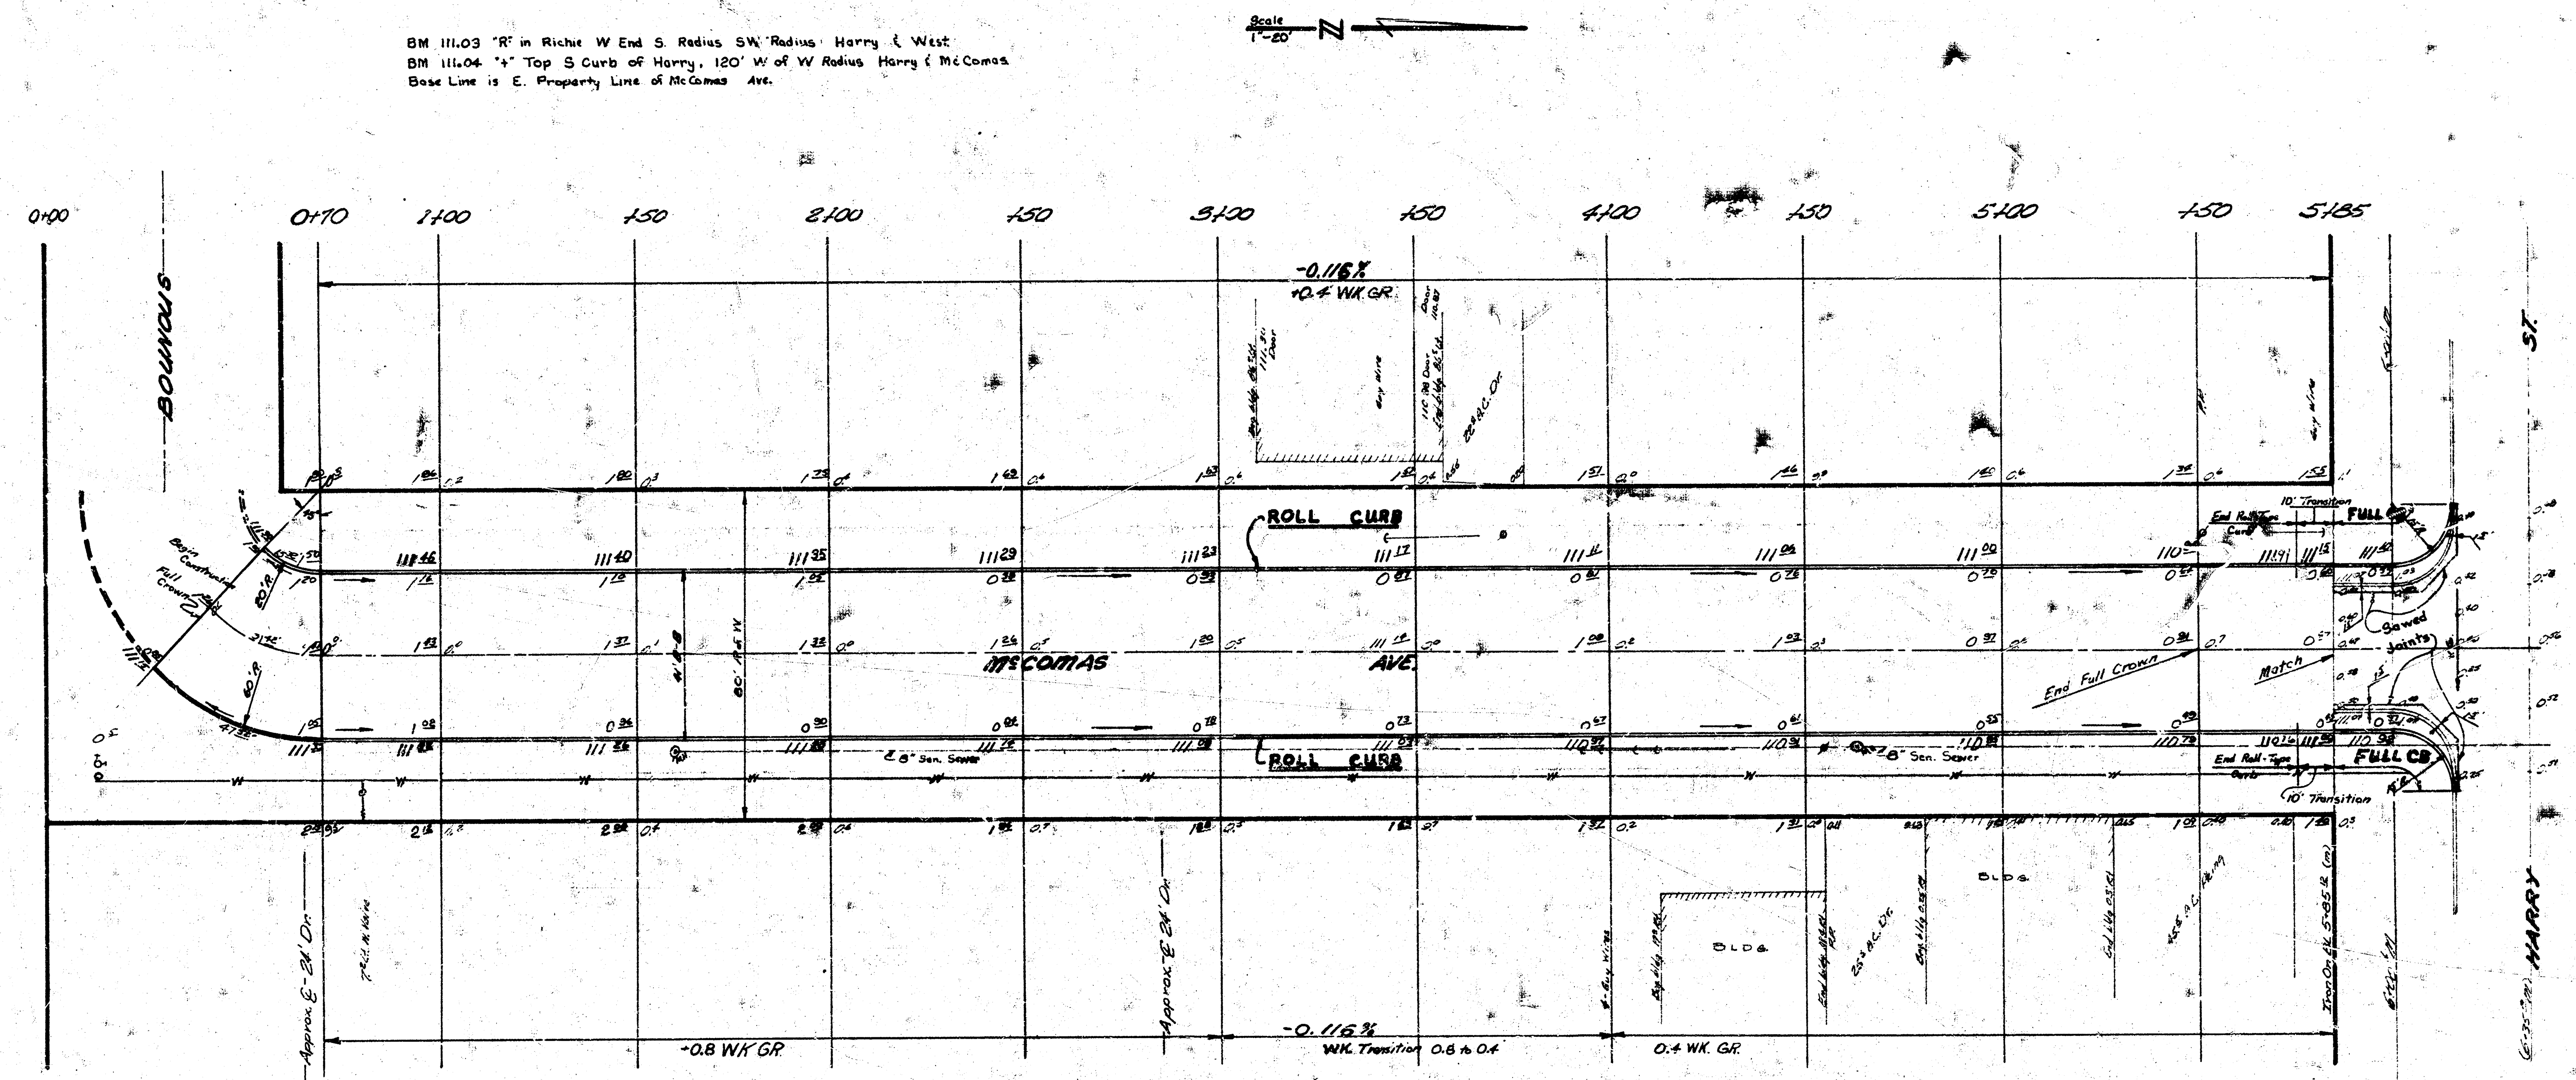

Note: BID ITEM of "BORROW EXCAVATION" is to include all costs of acquiring, excavating and delivering material to the project for use as "Compacted" and "Loose Fill".

BORROW EXCAVATION
852.5 Cu Yds
+10% 85.3
Total 937.8 Cu Yds

"Earthwork"

Excavation City	Excavation Property		Comp. Fill City	Comp. Fill Property
14.1	33.8	Cu Yds	0²	301.9
1.4	3.4	+10%	-	30.2
		+S&M	-	79.6
15.5	37.2	Total	0²	411.7

JAMES H. TANDY 2012 PROFESSIONAL ENGINEER

B. E. SMITH LICENSED 436 KANSAS PROFESSIONAL ENGINEER

2/3

Mc COMAS AVE.
S.L. BOUNOUS TO S.L. HARRY
40'-7" Conc. & Curb.
B.E. Smith City Engineer
City of Wichita, Kansas
Date Aug. 1969 Proj. C19-6