


B.M. 15188 S.W. COR. CONC. PORCH N.E. LEVITT 15' N. EL. BLACKWILL


ESTIMATE OF QUANTITIES			
NO. QUANTITIES FIGURED IN ESTIMATE			
Quantity	Unit	Item	Est. Amount
2,377.5	Sq. Yd.	Rein. Conc. Pavement	6,575.0
1,666.0	Cu. Yd.	Comp. Gr. & Grt.	16,660.0
3,175.0	Cu. Yd.	Gravel	31,750.0
5,965	Lbs.	Rein. Steel	1,193.0

NOTE: This drawing is for the purpose of showing the location and extent of the proposed work and is not to be used for construction purposes without the approval of the City Engineer.

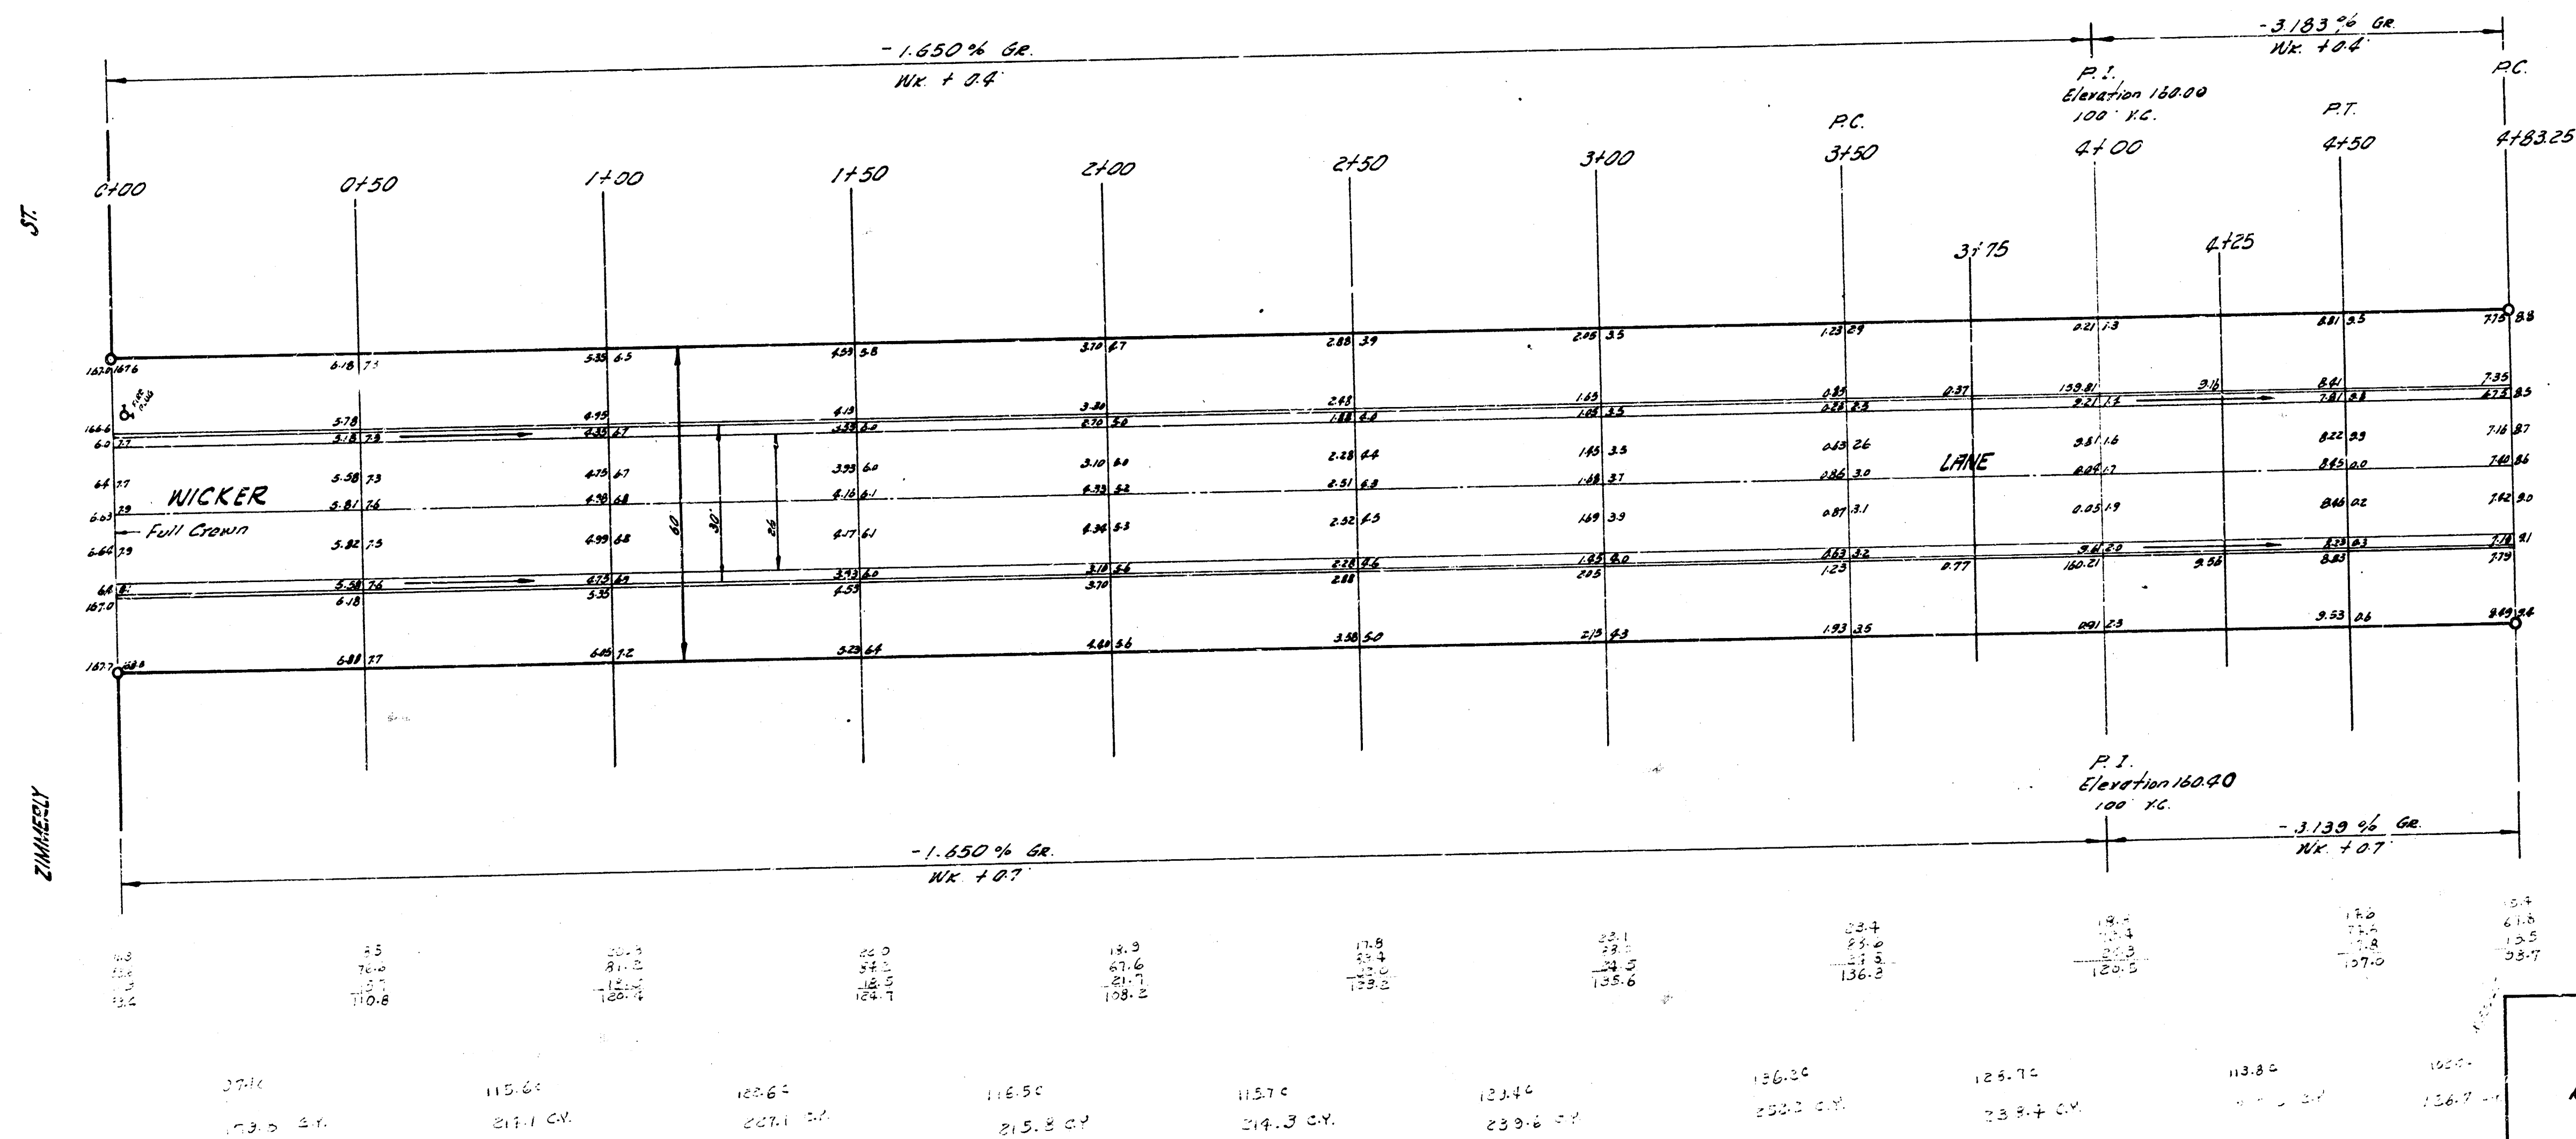

WICKER LANE
ALL ZIMMERLY TO S.E. LEVITT
26 - 2 - 30 AC.
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
SEPT. 1958 PRIVATE

1/2

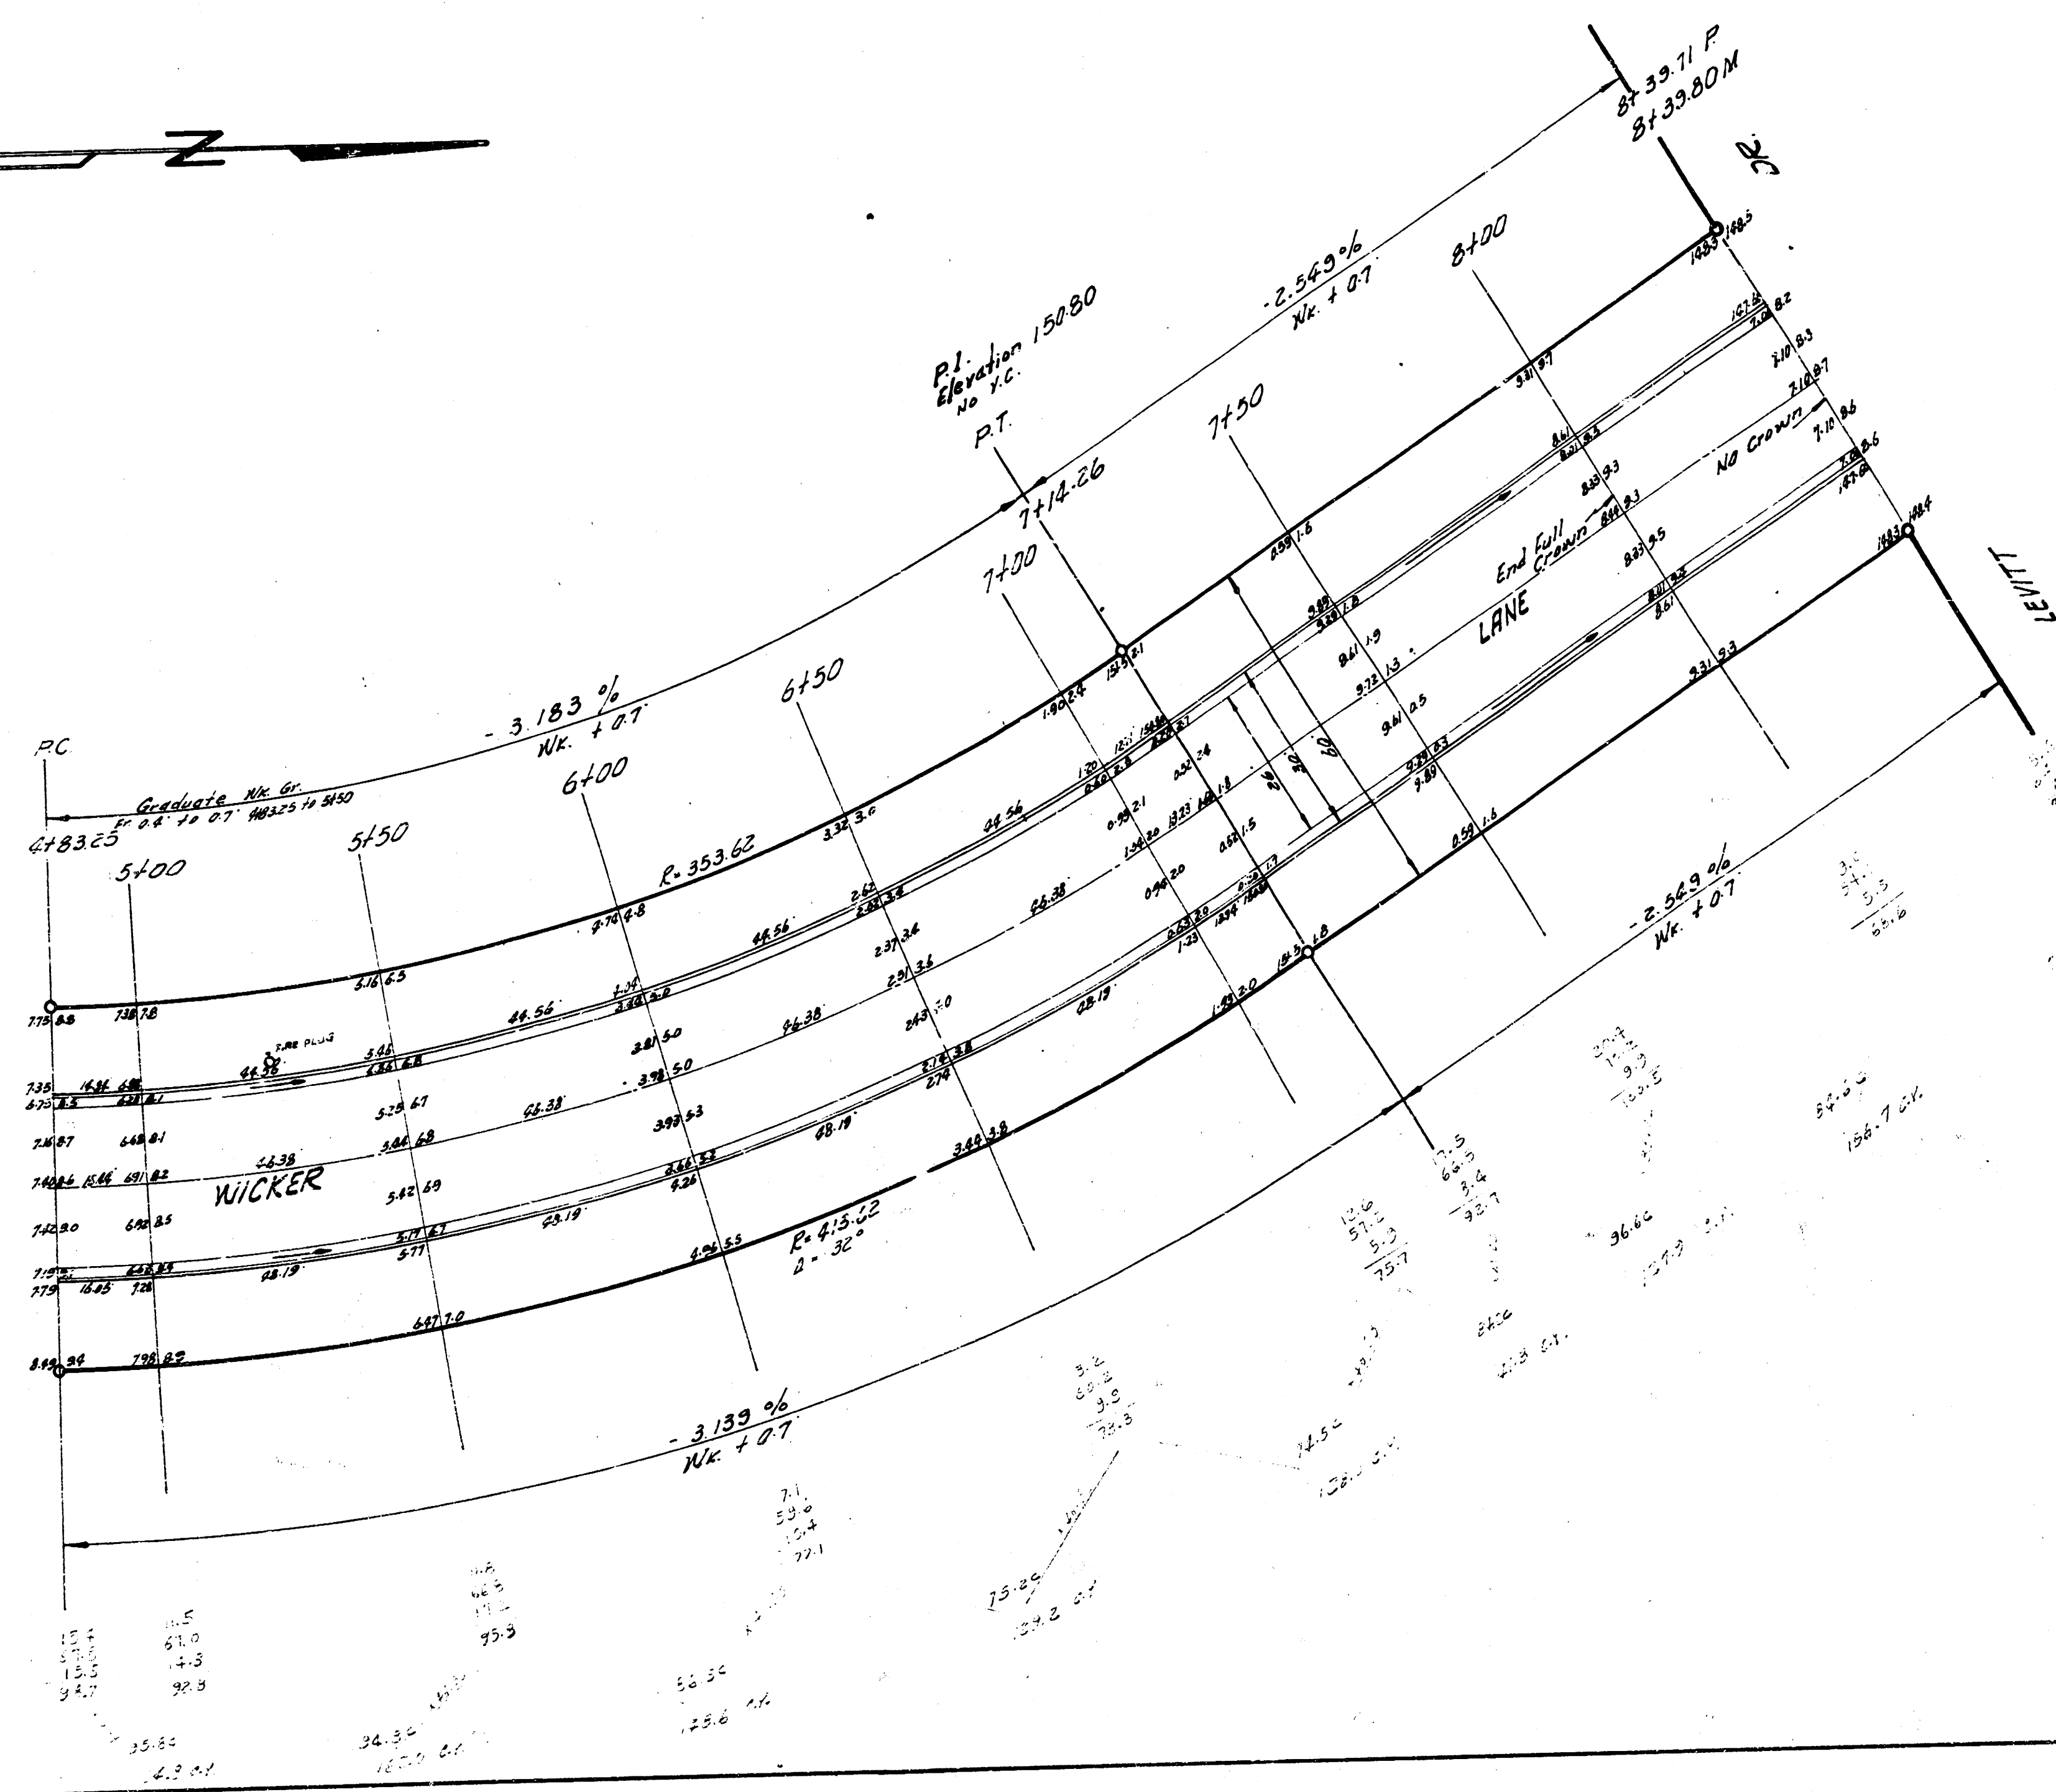

CURVE DATA STA 4+83.25 TO STA 7+12.26 STA ON E.P.L.					
Stationing on E.P.L.	Arc Length	Chord Length	Chord Bearing	Deflection	Time
4+83.25	100.00	100.00	0° 00' 00"	0° 00' 00"	0° 00' 00"
5+00	16.75	16.46	1° 08' 36"	1° 08' 36"	1° 08' 36"
5+50	50.00	49.18	3° 21' 47"	3° 21' 47"	3° 21' 47"
6+00	50.00	49.18	3° 21' 47"	3° 21' 47"	3° 21' 47"
6+50	50.00	49.18	3° 21' 47"	3° 21' 47"	3° 21' 47"
7+00	50.00	49.18	3° 21' 47"	3° 21' 47"	3° 21' 47"
7+12.26	16.26	16.14	0° 00' 00"	0° 00' 00"	0° 00' 00"

WICKER LANE
 N.L. ZIMMERLY TO S.L. LEVITT
 PROJ. NO. PRIVATE

(2)