B.M. = 101.72 S.W. cor porch. House N.E. Cor MARKET and KINKAID

N

SCALE 1" = 10'




| BILL OF MATERIALS | | |
|---|---|---|
| 380.9 | Sq yds | 7" CONC PAVEMENT |
| 125 | lin ft | KEY JOINT |
| 81.4 | lin ft | INTEGRAL CURB |
| 1,660 | lbs | REIN STEEL |
| 84.1 | cu yds | EXCAVATION |
| 58.0 | cu yds | Sub Grade Treatment (COMP FILL) |




TYPICAL SECTION
as scale

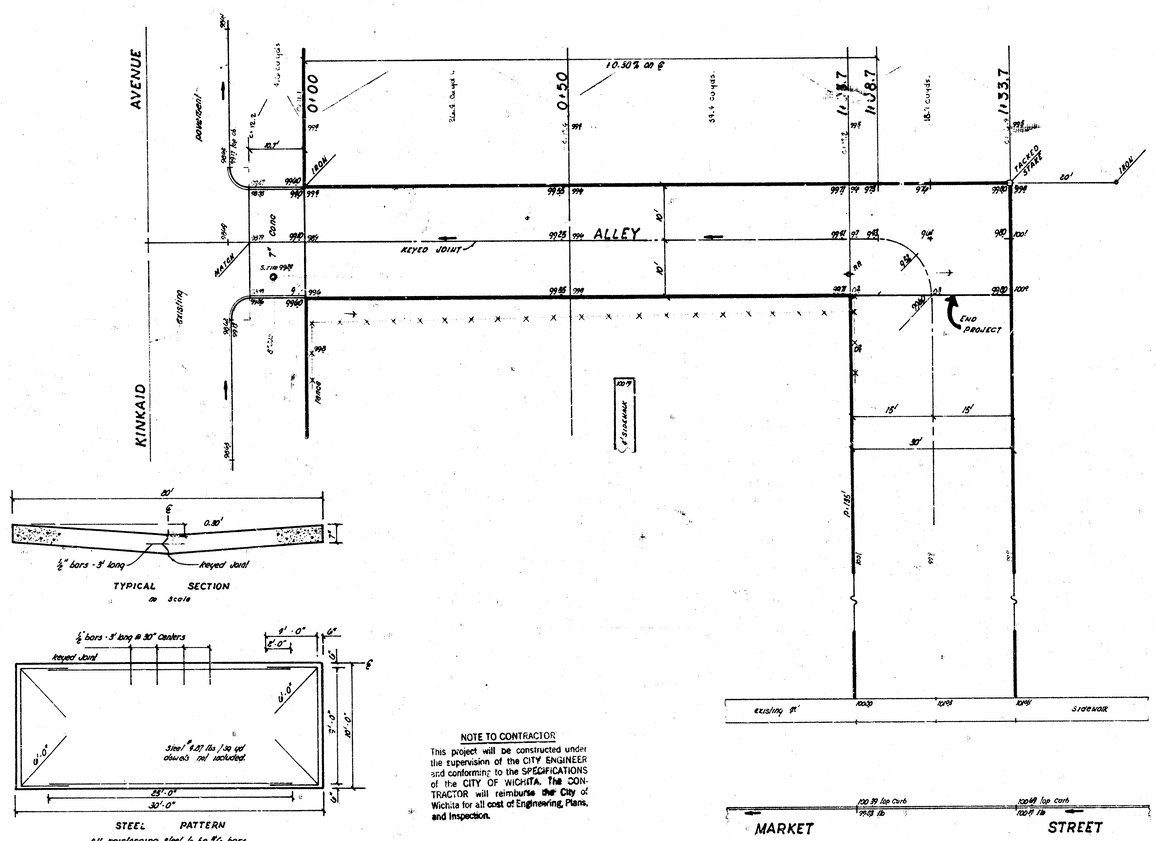


STEEL PATTERN

All reinforcing steel to be #6 bars except dowel bars.

NOTE TO CONTRACTOR

This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

"ALLEY" BETWEEN BROADWAY & MARKET
S.L. KINKAID AVE to 133.7' So. KINKAID AVE.
20' —— 7" CONCRETE

CITY OF WICHITA, KANSAS

R. W. LINN — CITY ENGINEER

DATE Dec. 1971 — PRIVATE PROJECT