



BM = 99.34 Step bench S.S. HLP NorthEast BLAKE and K-15
 BM = 98.02 Bolt W. Side HLP 160' N. of N.L. PAWNEE W. Side HYDRAULIC


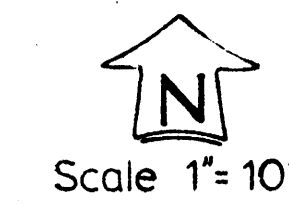


Base Line is on South Line of Alley

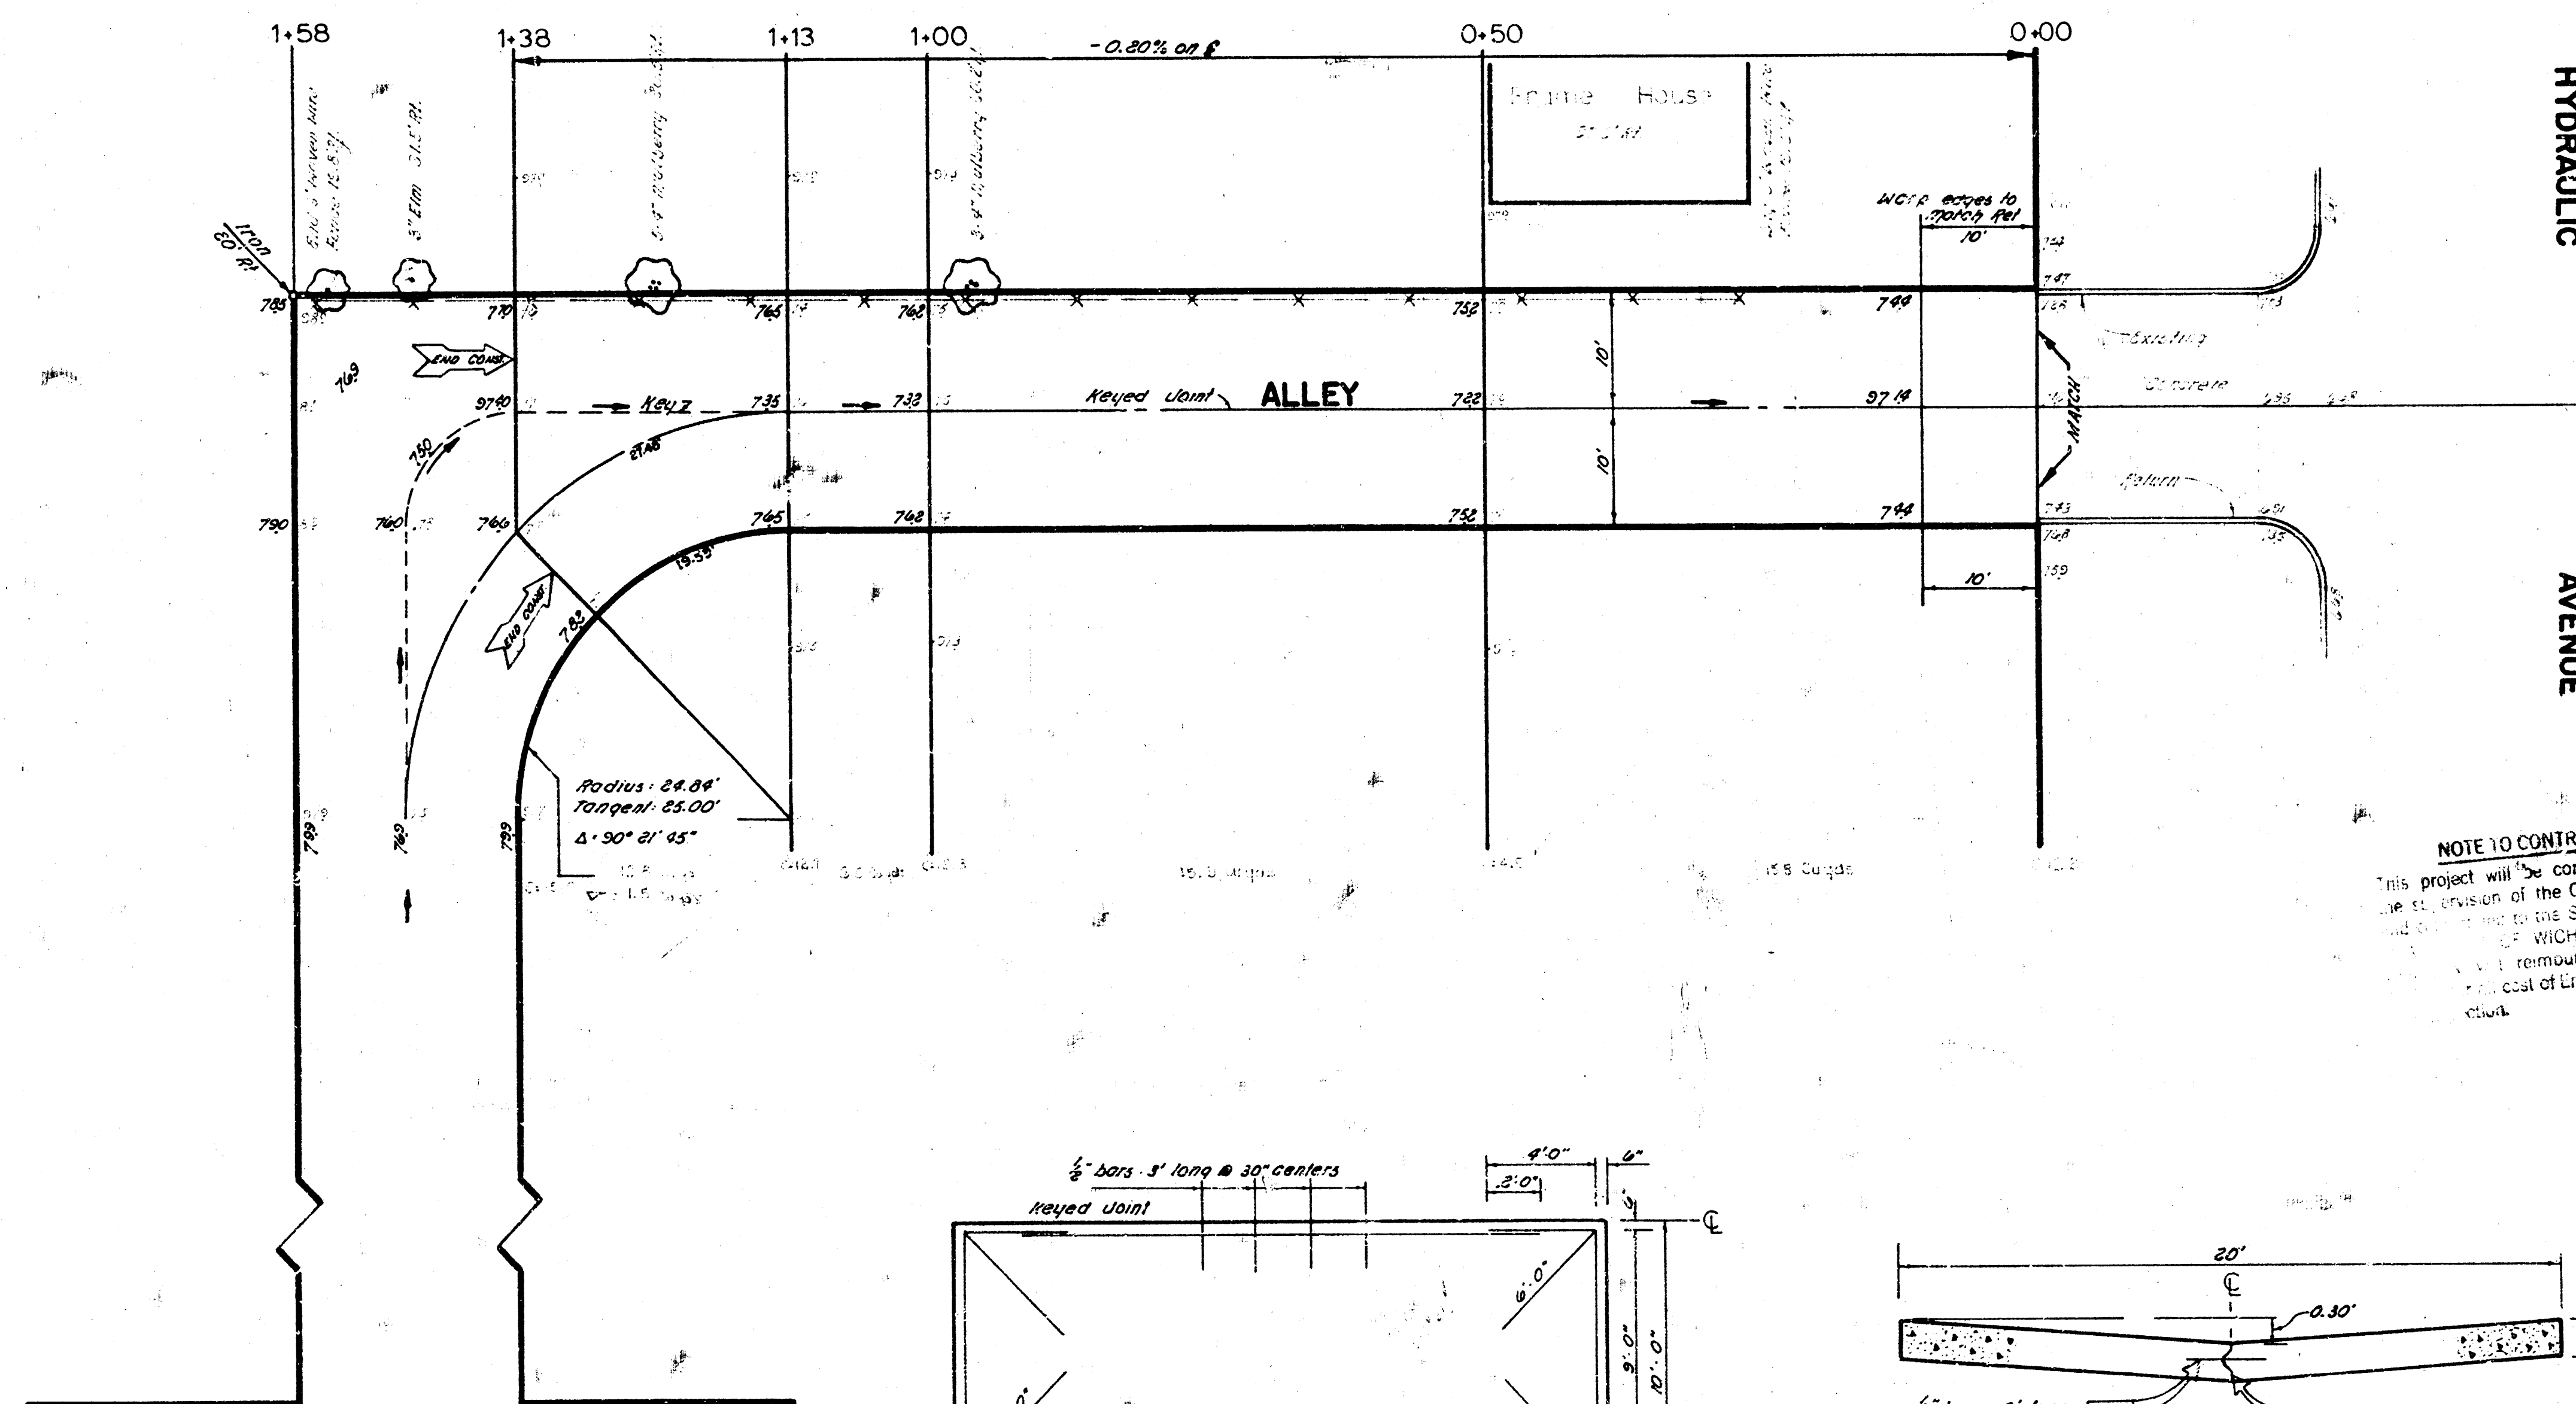

LIST OF QUANTITIES	
ITEM	QUANTITY
7" conc pavt	315.30 sq yds
rein steel	1,645 lbs
keyed joint	138 lin feet
excavation	52 cu yards
fence removed	125 lin feet

NOTE TO CONTRACTOR
 This project will be constructed under the supervision of the CITY ENGINEER and shall conform to the SPECIFICATIONS and STANDARDS of the CITY OF WICHITA. The CONTRACTOR shall reimburse the City of Wichita for the cost of Engineering Plans, etc.

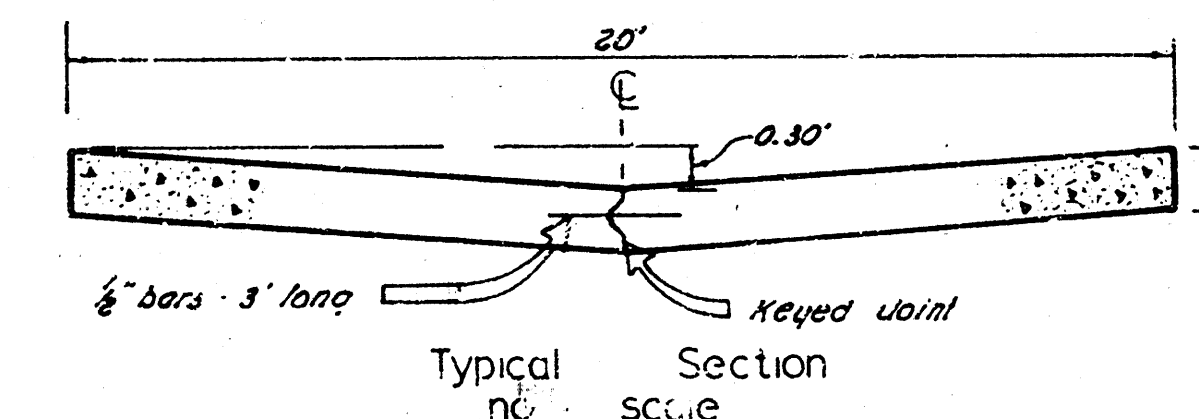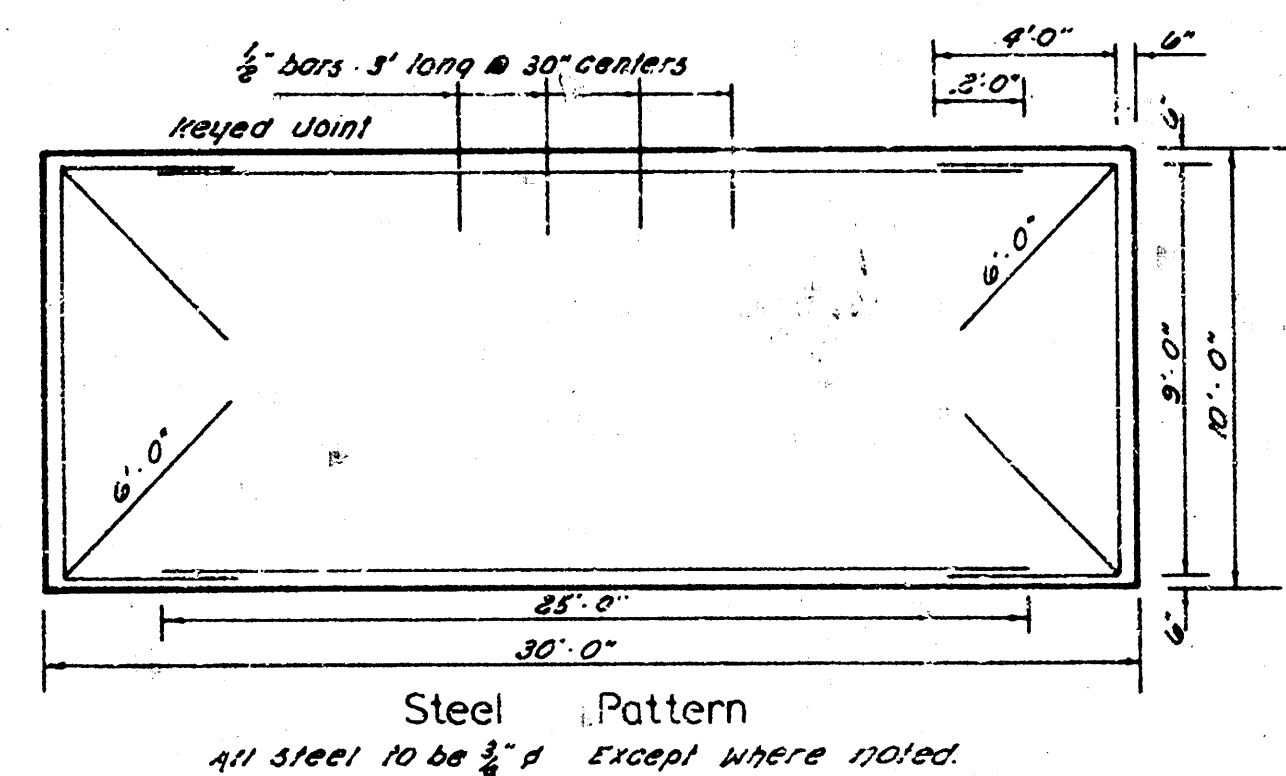

ALLEY North of PAWNEE AVENUE,
 W.L. HYDRAULIC to E.L. Alley West of
 HYDRAULIC.

20' — 7' — CONCRETE
 CITY OF WICHITA, KANSAS
 B.E. Smith City Engineer
 Date OCT 1948 Private Project