



CUSTER AVENUE
N.L. 31st St. So. to the N.L. 30th St. So.


TYPICAL SECTIONS OF 30' CONCRETE PAVEMENT
Proj. No. DAKS575033

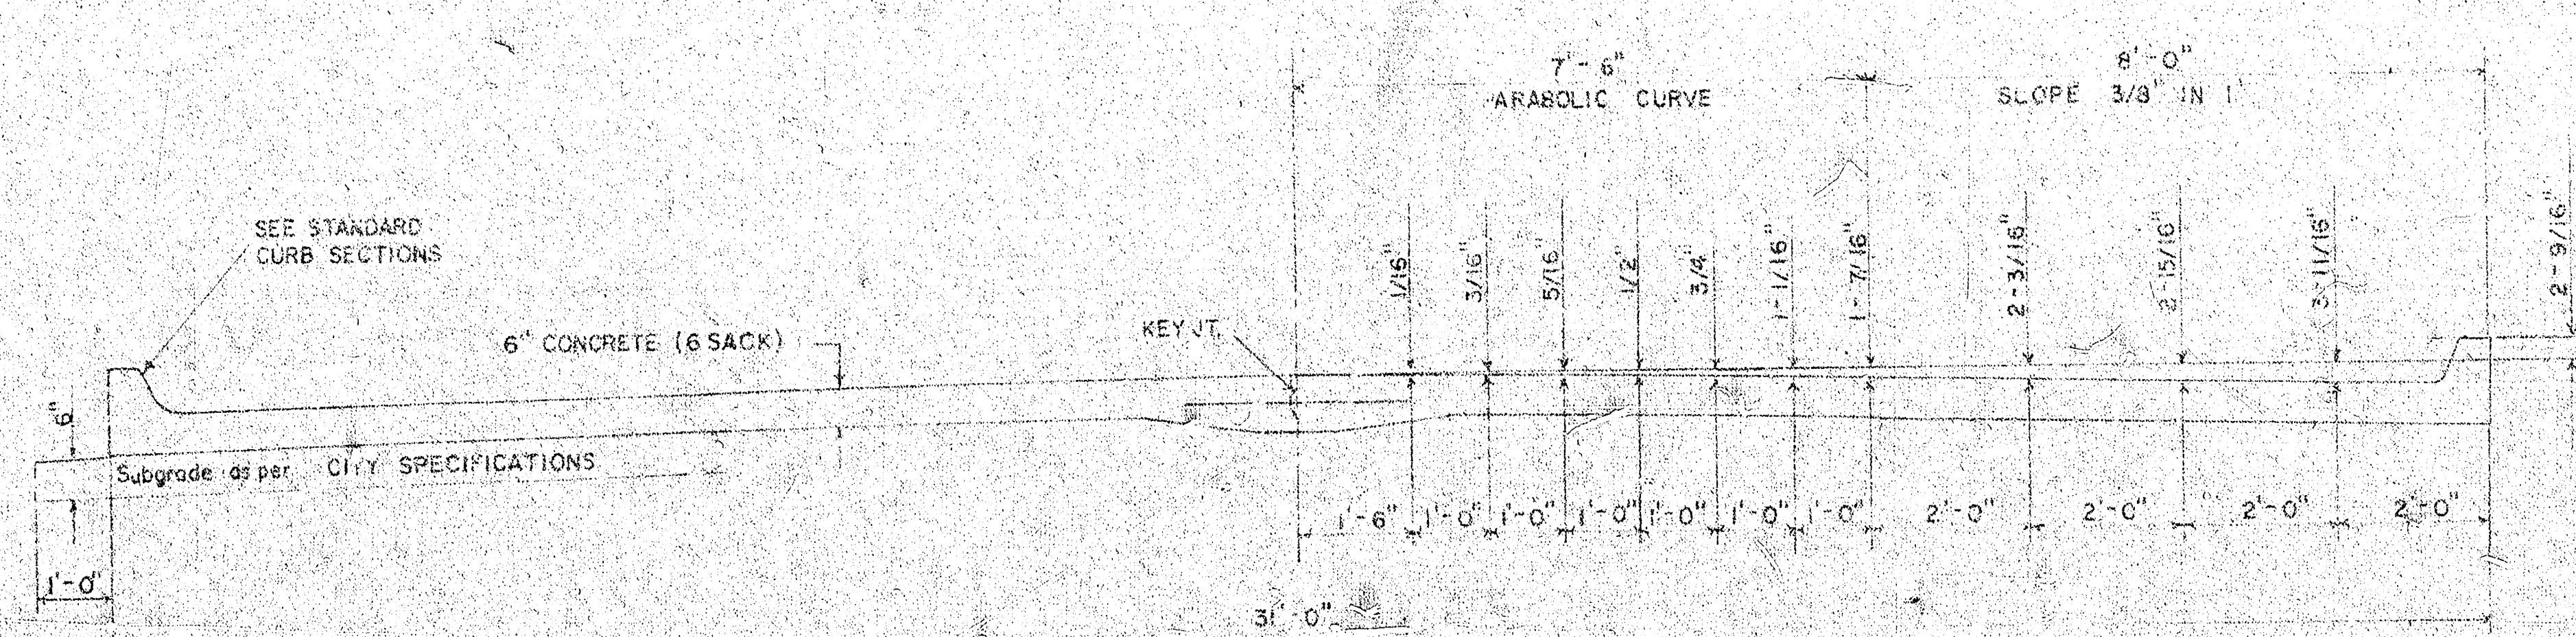


TYPICAL SECTION WITH STANDARD CROWN

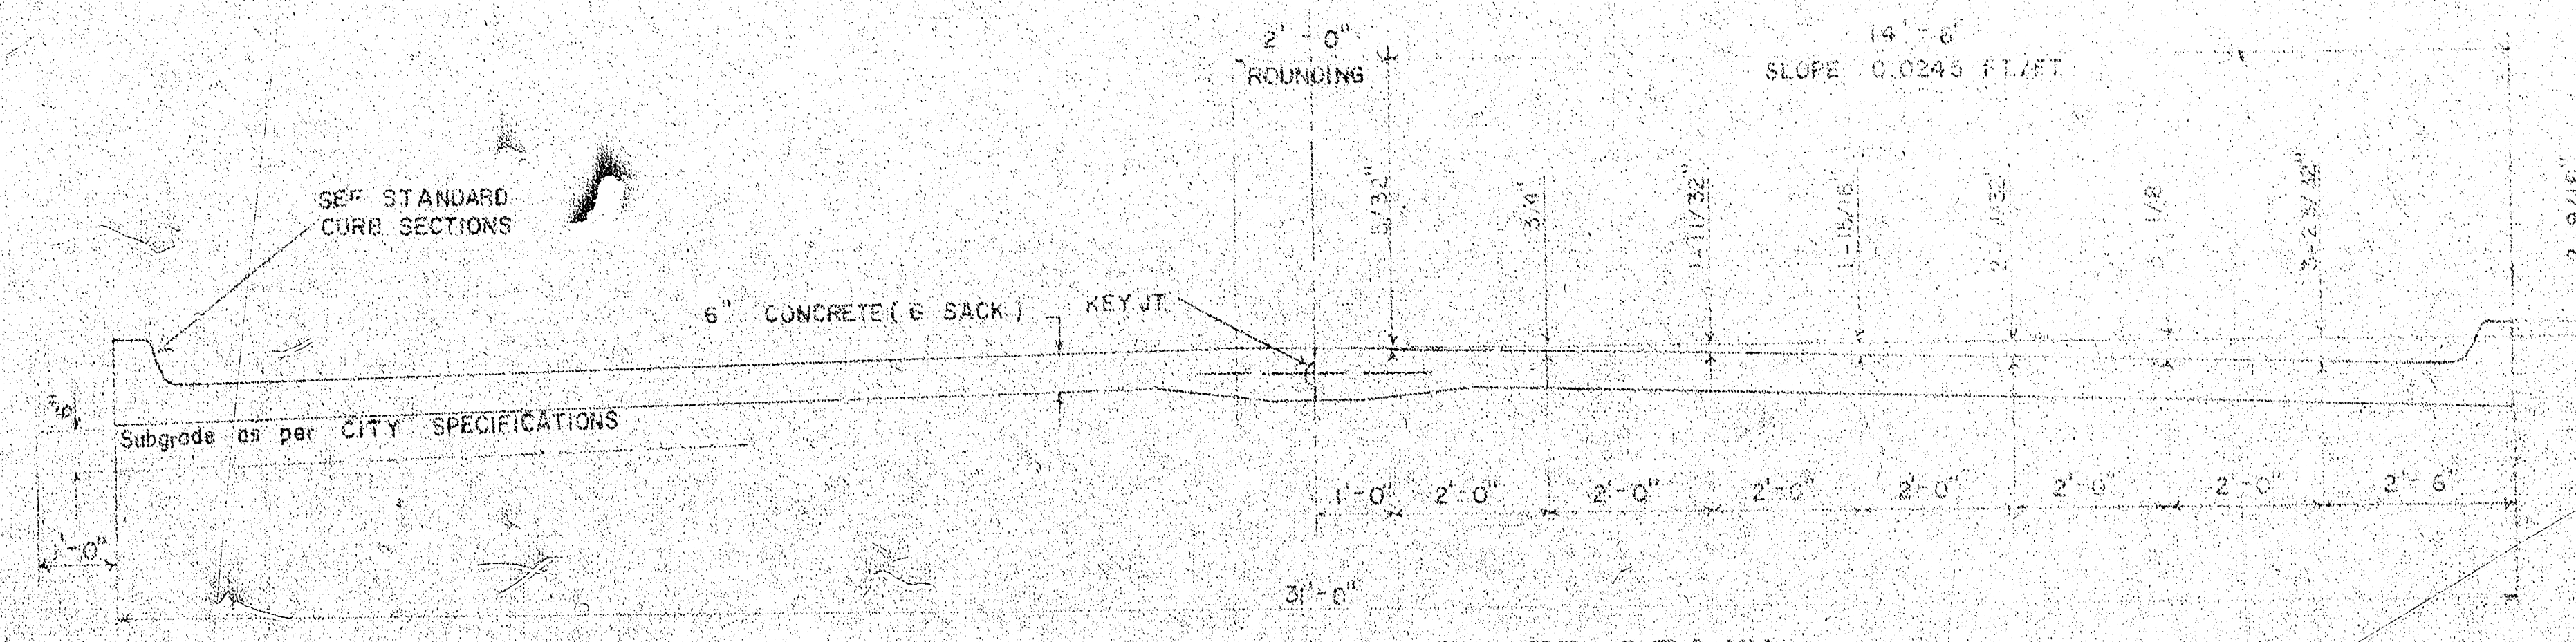

TYPICAL SECTION WITH ALTERNATE CROWN

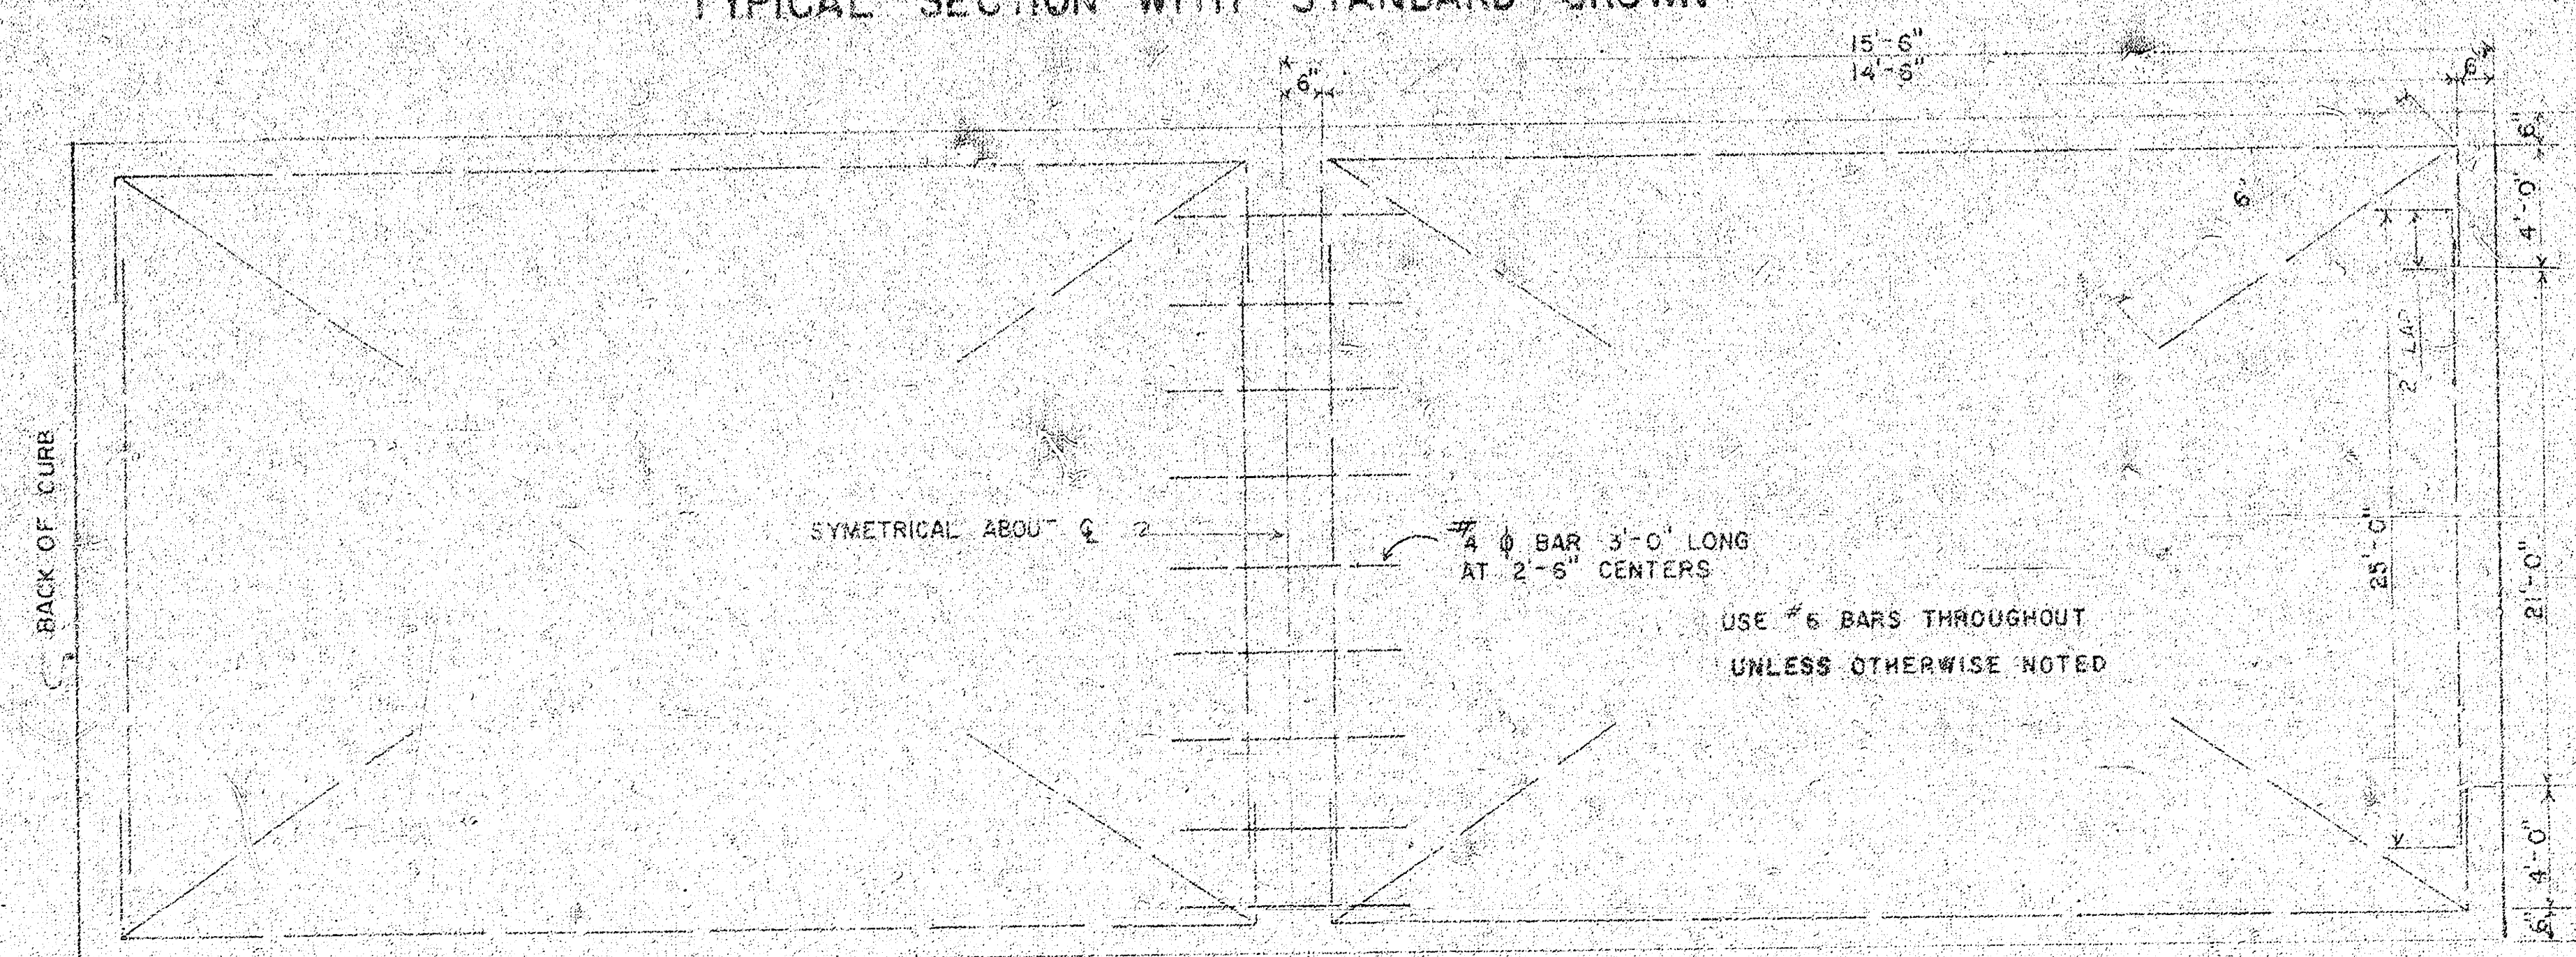


STEEL PATTERN

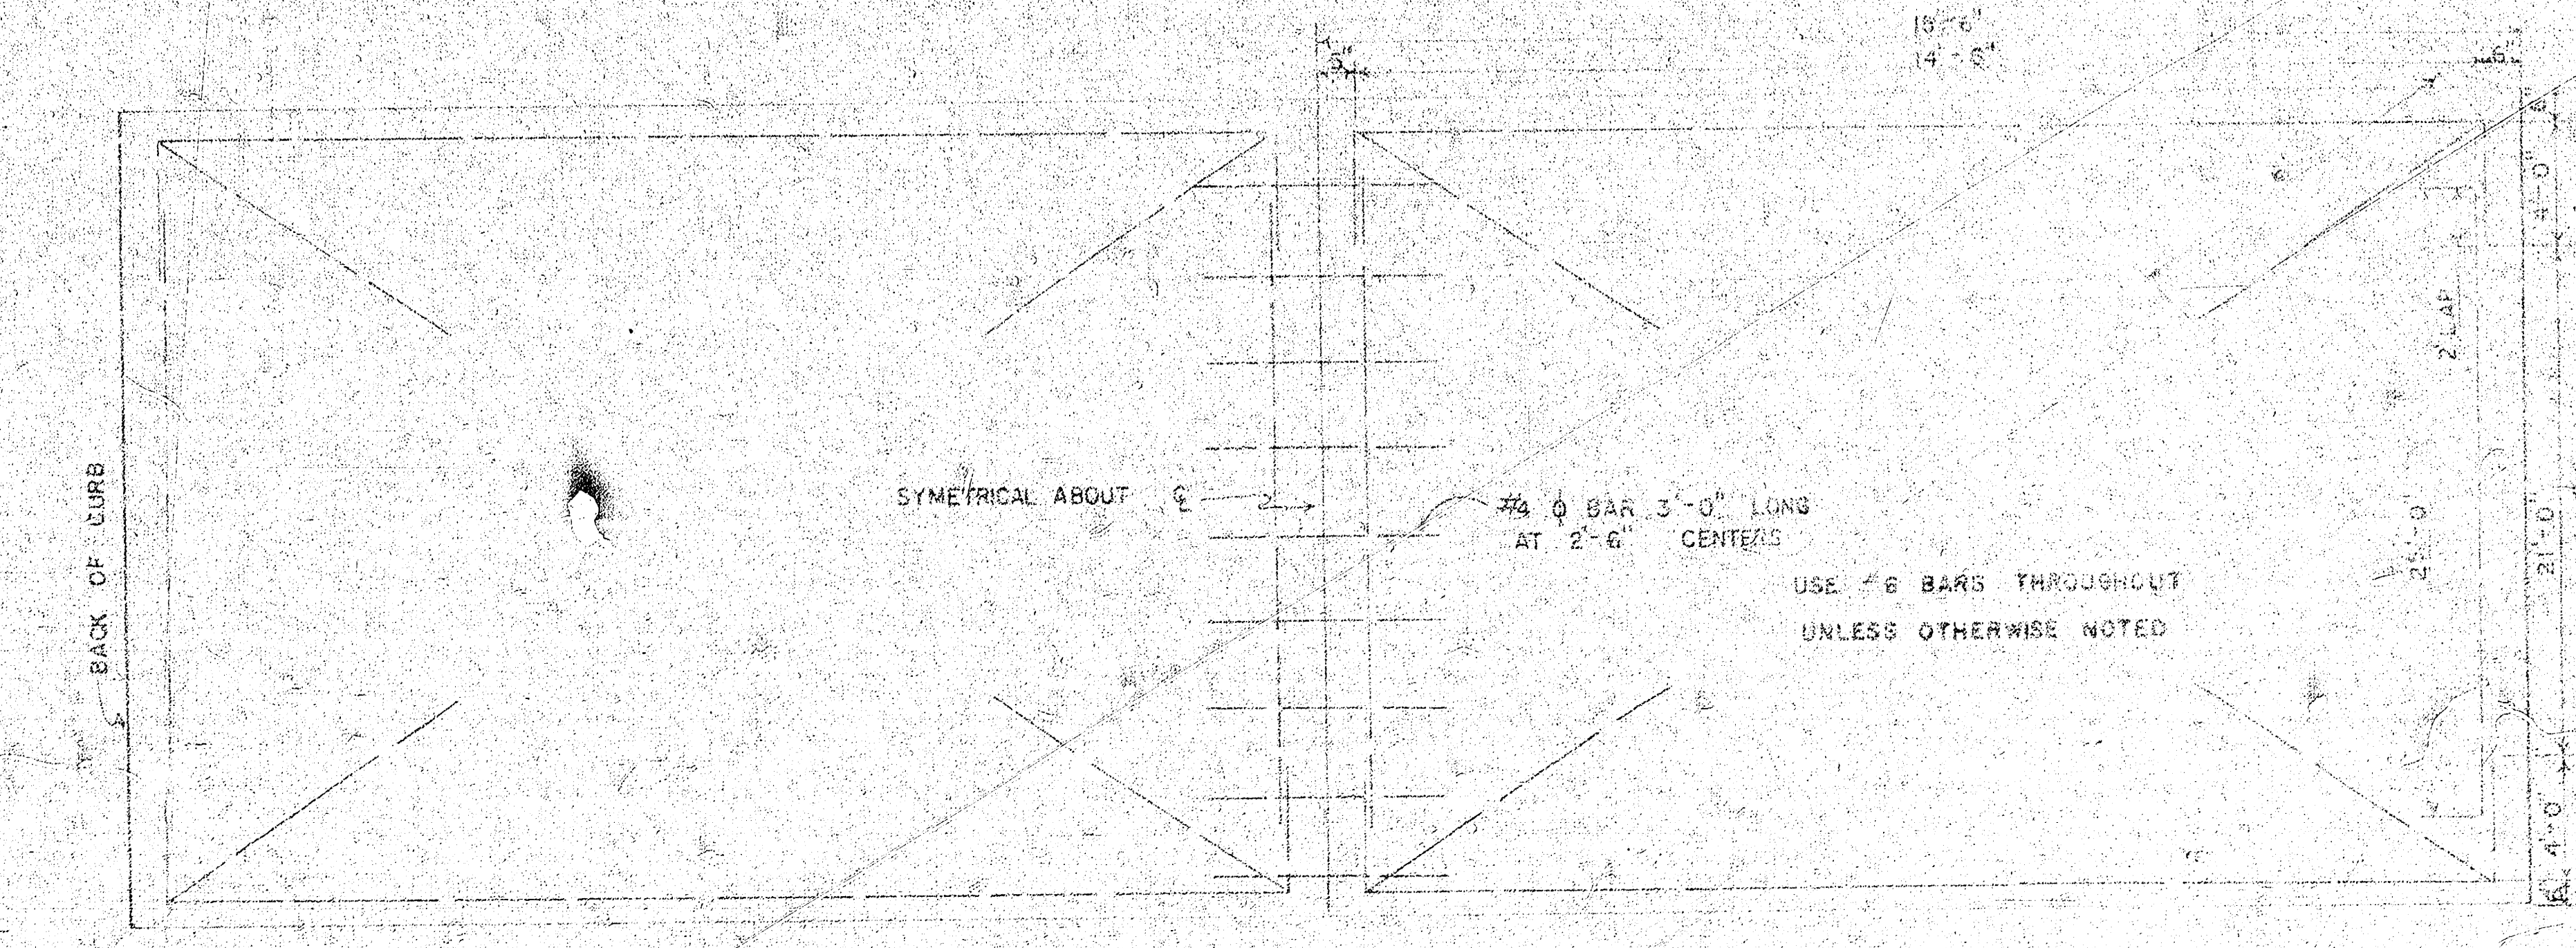


STEEL PATTERN


STANDARD SECTIONS OF

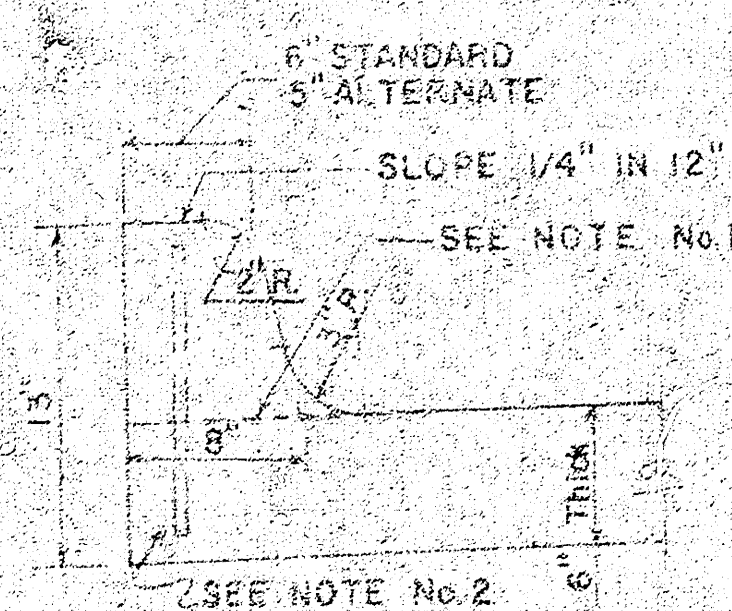


INTEGRAL CURB

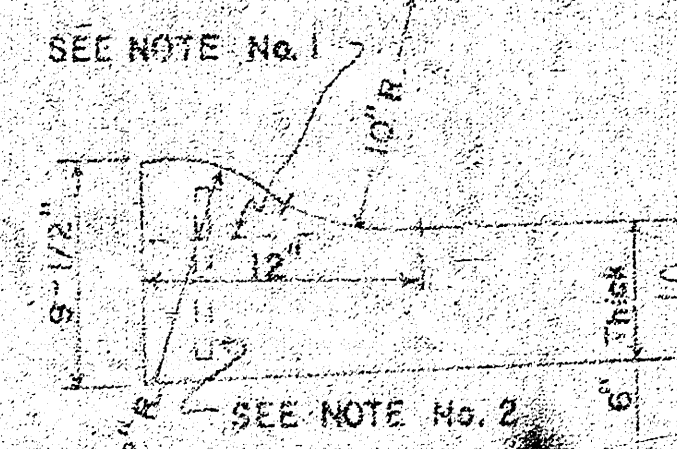

ROLL-TYPE

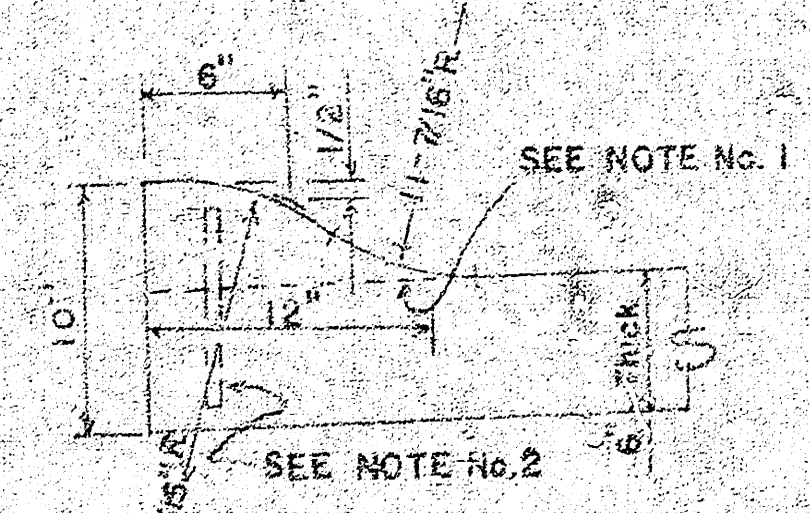


ALTERNATE ROLL-TYPE

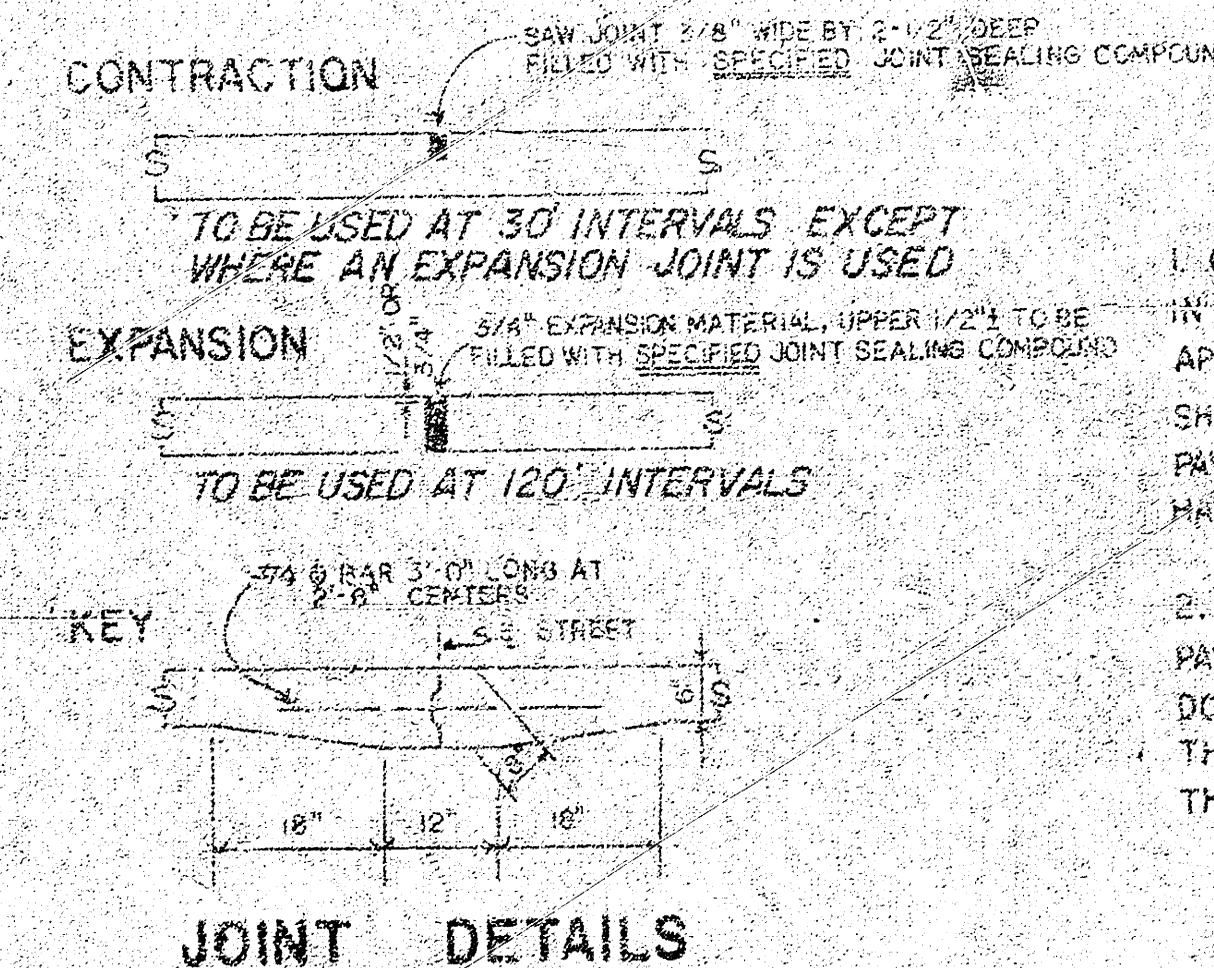

GENERAL NOTES

- CONTRACTION JOINTS MAY BE CONSTRUCTED IN INTEGRAL CURB BY SAWING WITH AN APPROVED CONCRETE SAW. THE SAW CUT SHALL EXTEND THROUGH THE CURB TO THE PAVEMENT. SAWED CONTRACTION JOINTS SHALL HAVE A MAXIMUM SPACING OF 10'.
- INTEGRAL CURB SHALL BE TIED TO THE PAVEMENT BASE WITH SHORT DEFORMED DOWEL BARS SPACED AT 2'-6" INTERVALS. THESE DOWEL BARS SHALL NOT BE LESS THAN 1/2" OR MORE THAN 3/4" IN DIAMETER.

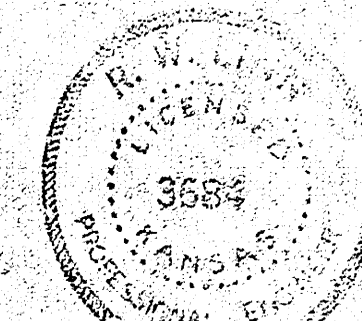


CITY OF WICHITA, KANSAS

Department of Public Works Engineering Division

R.W. Linn City Engineer

Date: Project No. DAKS575033

Surveyed by
 E. H. Henry
 Checked by
 B. H. AR 53

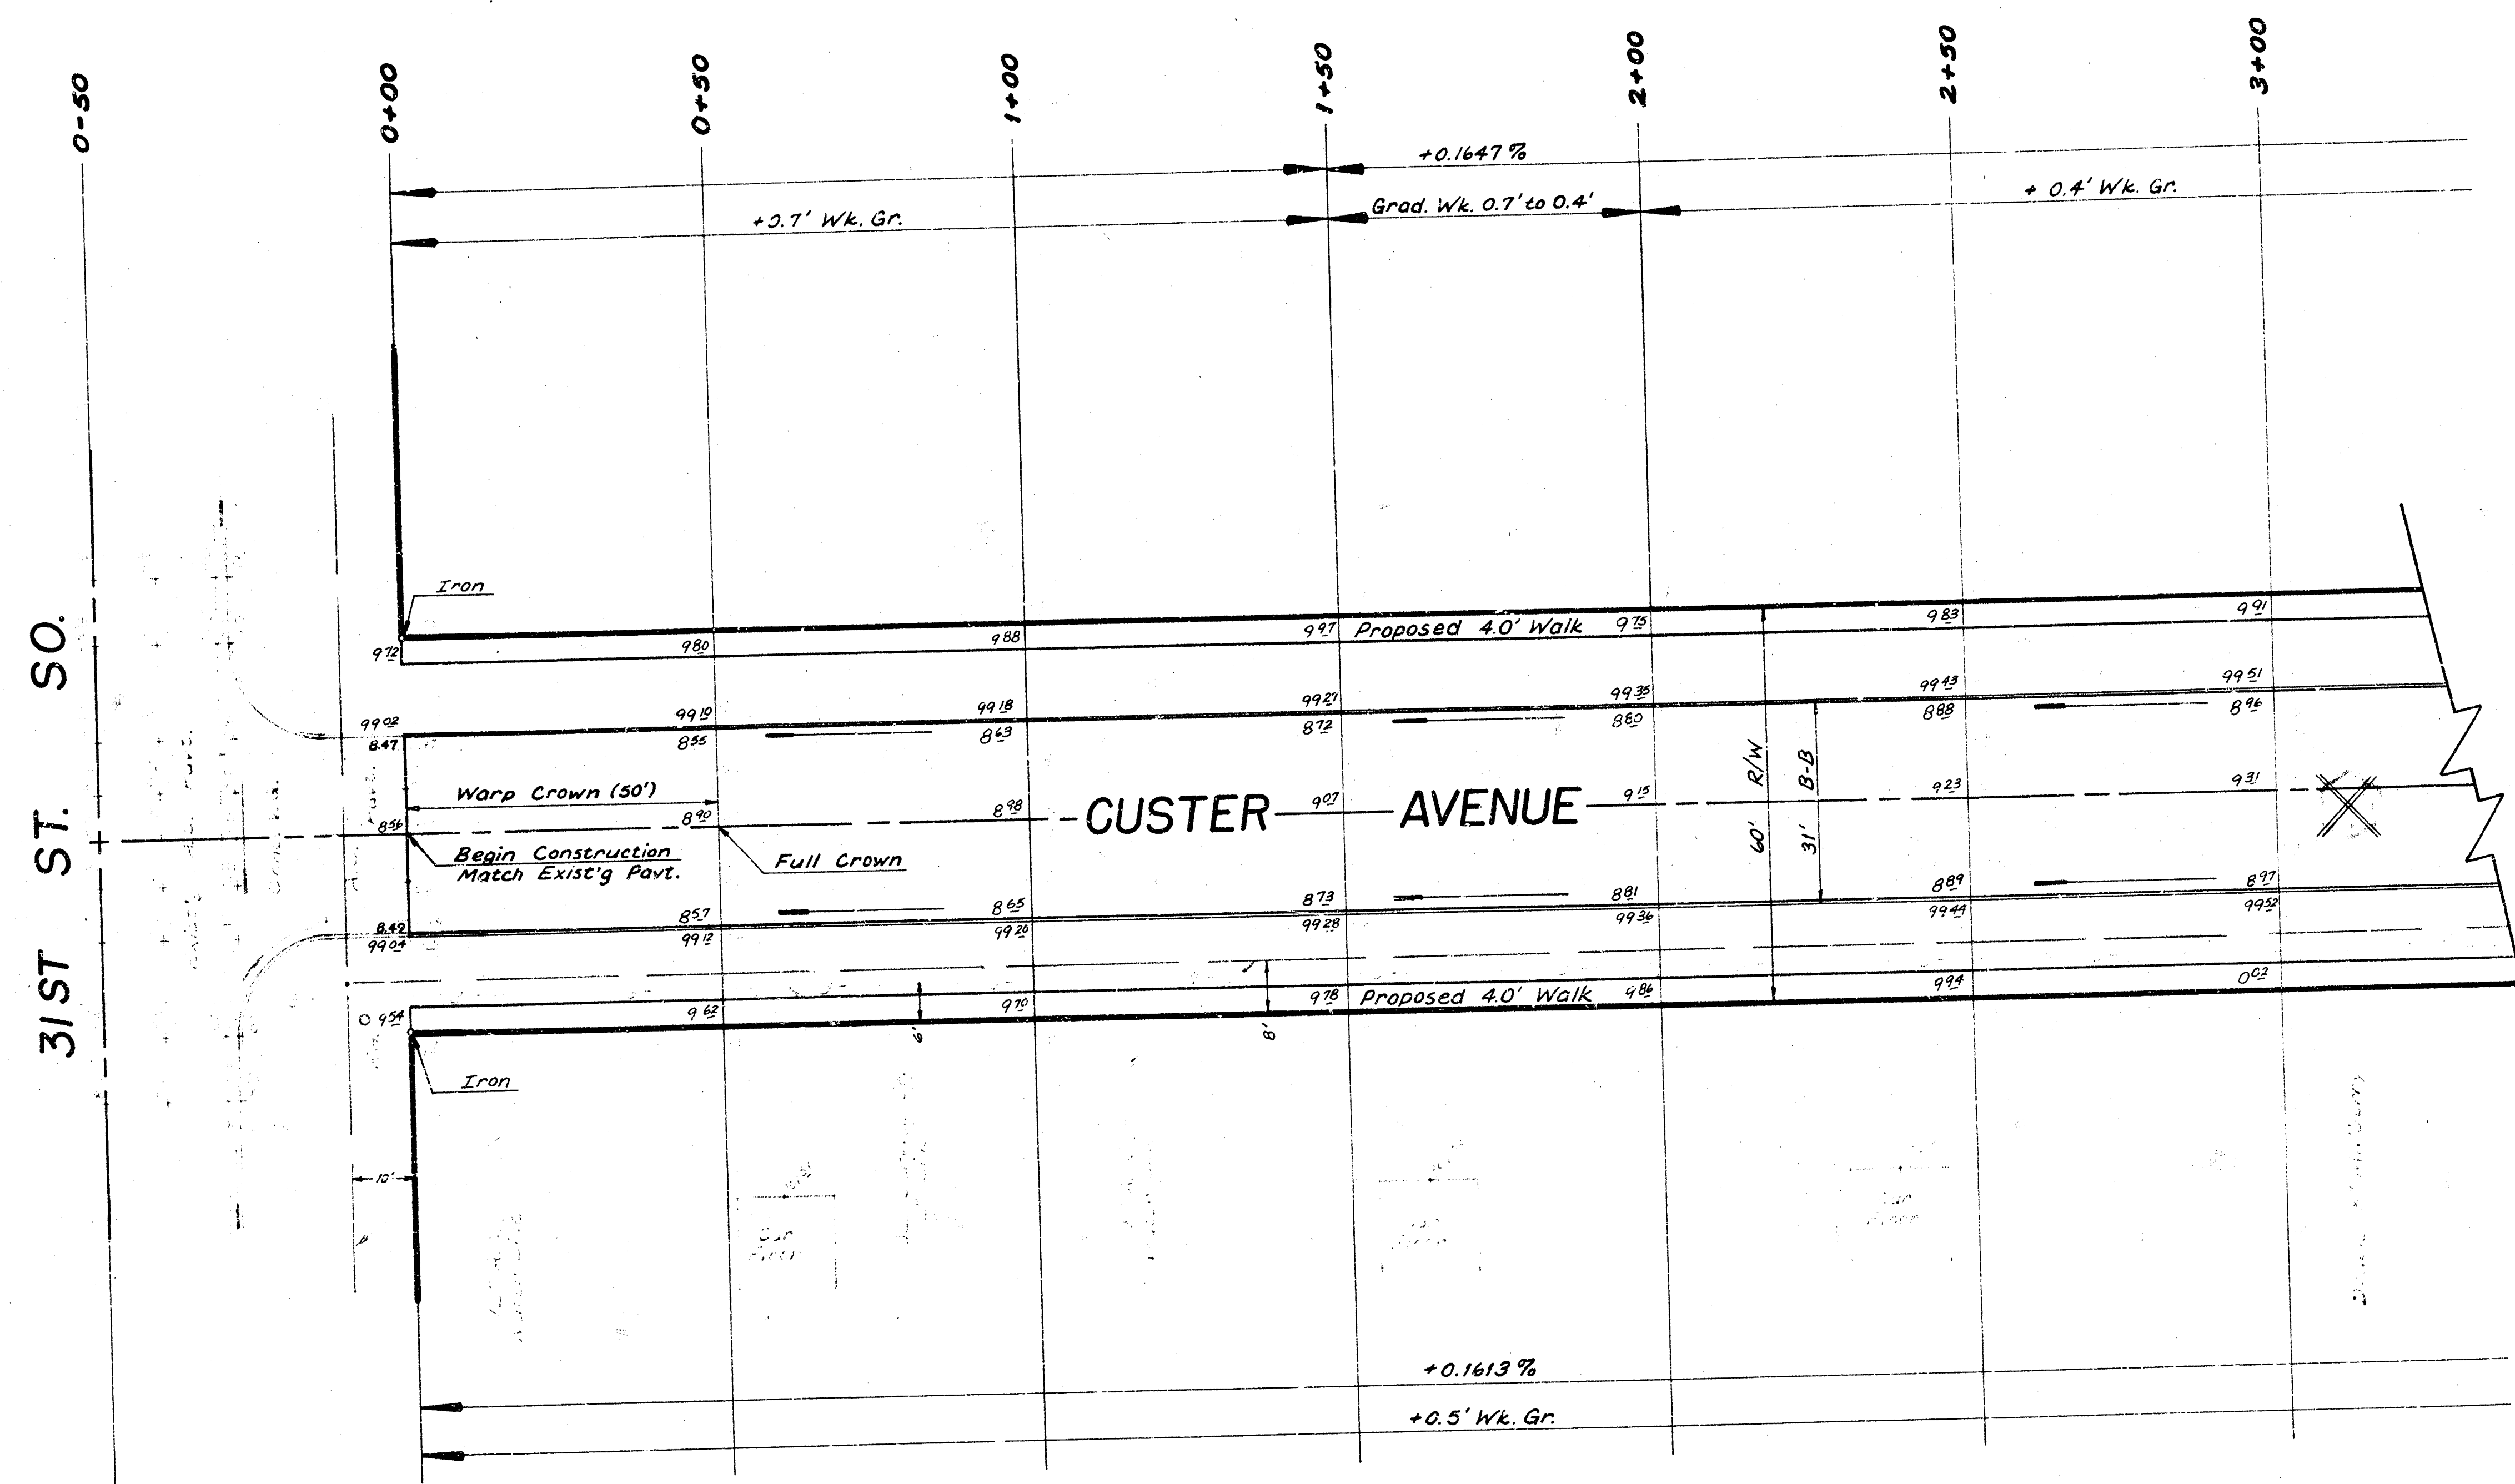

B.M. = 103.52 City Std. Disc E. End Handrail to R.C.B.C. @ Sheridan & 31st St. So.
 2 is 2 Custer

X = Tree Removal

NOTE TO FIELD ENGINEER & CONTRACTOR
 Grade paving and clear roadway for pro-
 posed sidewalk. Compact fill in sidewalk area.
 TO BE CONSTRUCTED BY "OTHERS".

SUB-GRADE
 TYPE OF SUB-GRADE TREATMENT SHALL BE DE-
 TERMINED BY THE FIELD ENGINEER. SUB-GRADE
 TREATMENT MAY CONSIST OF LIME TREATMENT,
 CEMENT TREATMENT, SUB-GRADE MODIFICA-
 TION, OR ANY COMBINATION OF THESE.

EARTHWORK:		
	Prop.	City
Excavation =	1435.4 C.Y.	40.7 C.Y.
+10% =	1578.9 C.Y.	4.1 C.Y.
Total =	1578.9 C.Y.	44.8 C.Y.
Compacted Fill =	35.0 C.Y.	—
+10% =	3.8 C.Y.	—
Total =	38.8 C.Y.	—

NOTE: EXCAVATION FROM PROJECT 575033 TO BE USED
 AS BORROW ON PROJECT 575032 AND PROJECT
 575042.

MANIPULATION = 2558 S.Y.

CUSTER AVE.
 N.L. 31st ST. SO. to N.L. 30th ST. SO.
 (6" Conc. Pavt. 30' & Cb.)
CITY of WICHITA, KANSAS

R.W. Linn City Engineer
 Proj. No. DAKS575033

Date _____

2/5

2/13

