


ELIZABETH AVE.

N.L. LOT 4, BLK. E TO N.L. BLK. A & E, VILM GARDENS 2ND ADDN.
472 76 245 80520 000 000 001

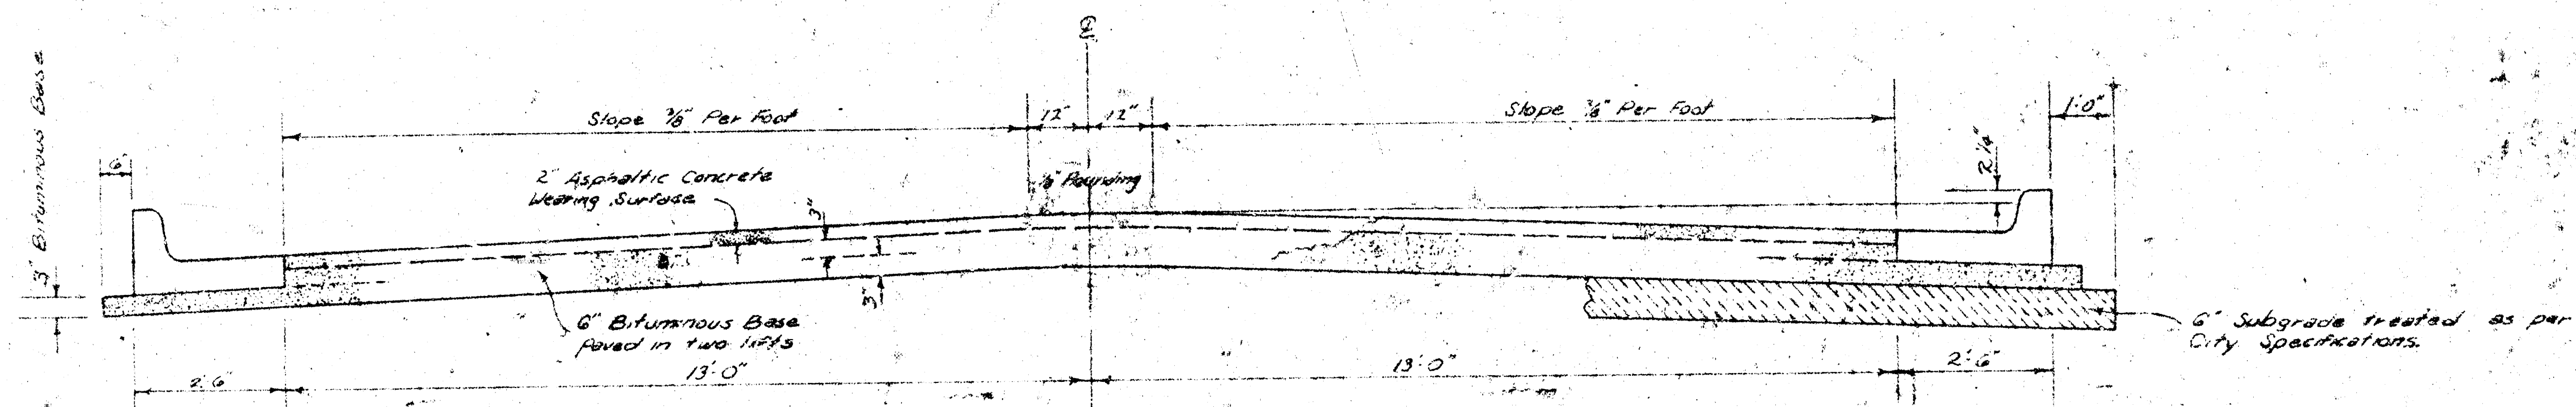


TYPICAL SECTION

3' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

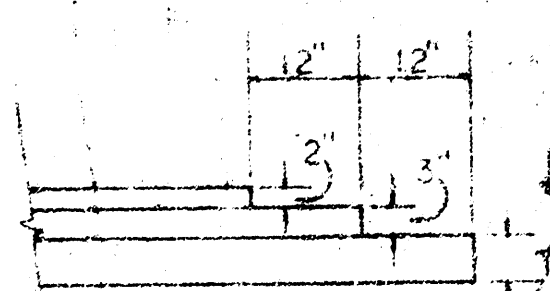



TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. pavement between the Comb. Curb & gutter shall be paid as Sq. Yds. 6" A.C. Pavement (a Bituminous Base). The Bituminous Base under the Comb. Curb & gutter shall be paid as Sq. Yds. 3" Bituminous Base.

COMBINED CURB & GUTTER

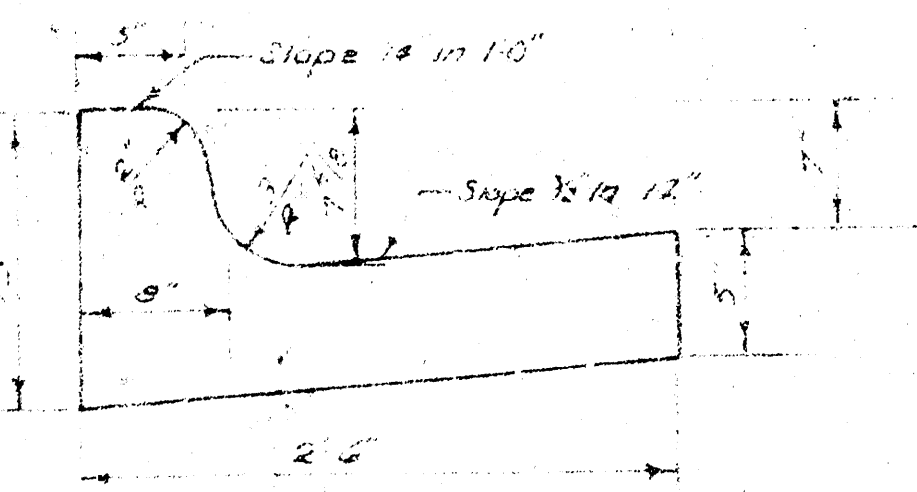

ROLL TYPE CURB & GUTTER

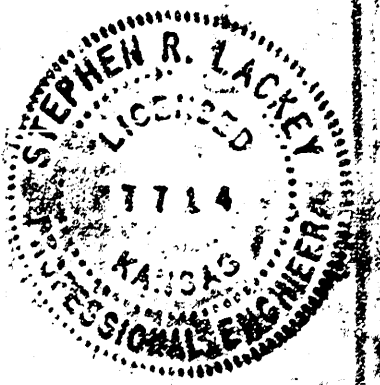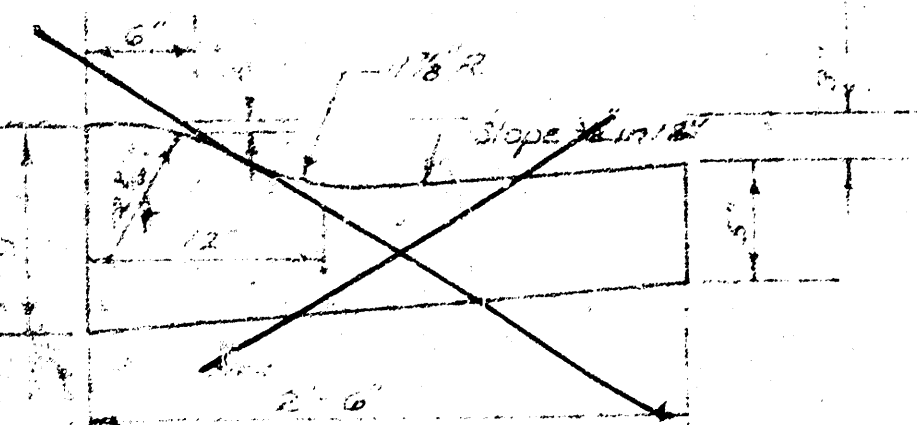

CITY OF WICHITA, KANSAS

DEPARTMENT OF PUBLIC WORKS — ENGINEERING



DEAN SELLERS Acting CITY ENGINEER

DATE: _____ PROJ. NO. DAKS 577035

B.T.M. 90.37 "a" SE Cor. Walk East Side Blk. 12 Southlake Vill. Apts 4141 So. Seneca.

Baseline is to Elizabeth Ave.

No More Than 1-20' Drive Or The Equivalent To Be Constructed.

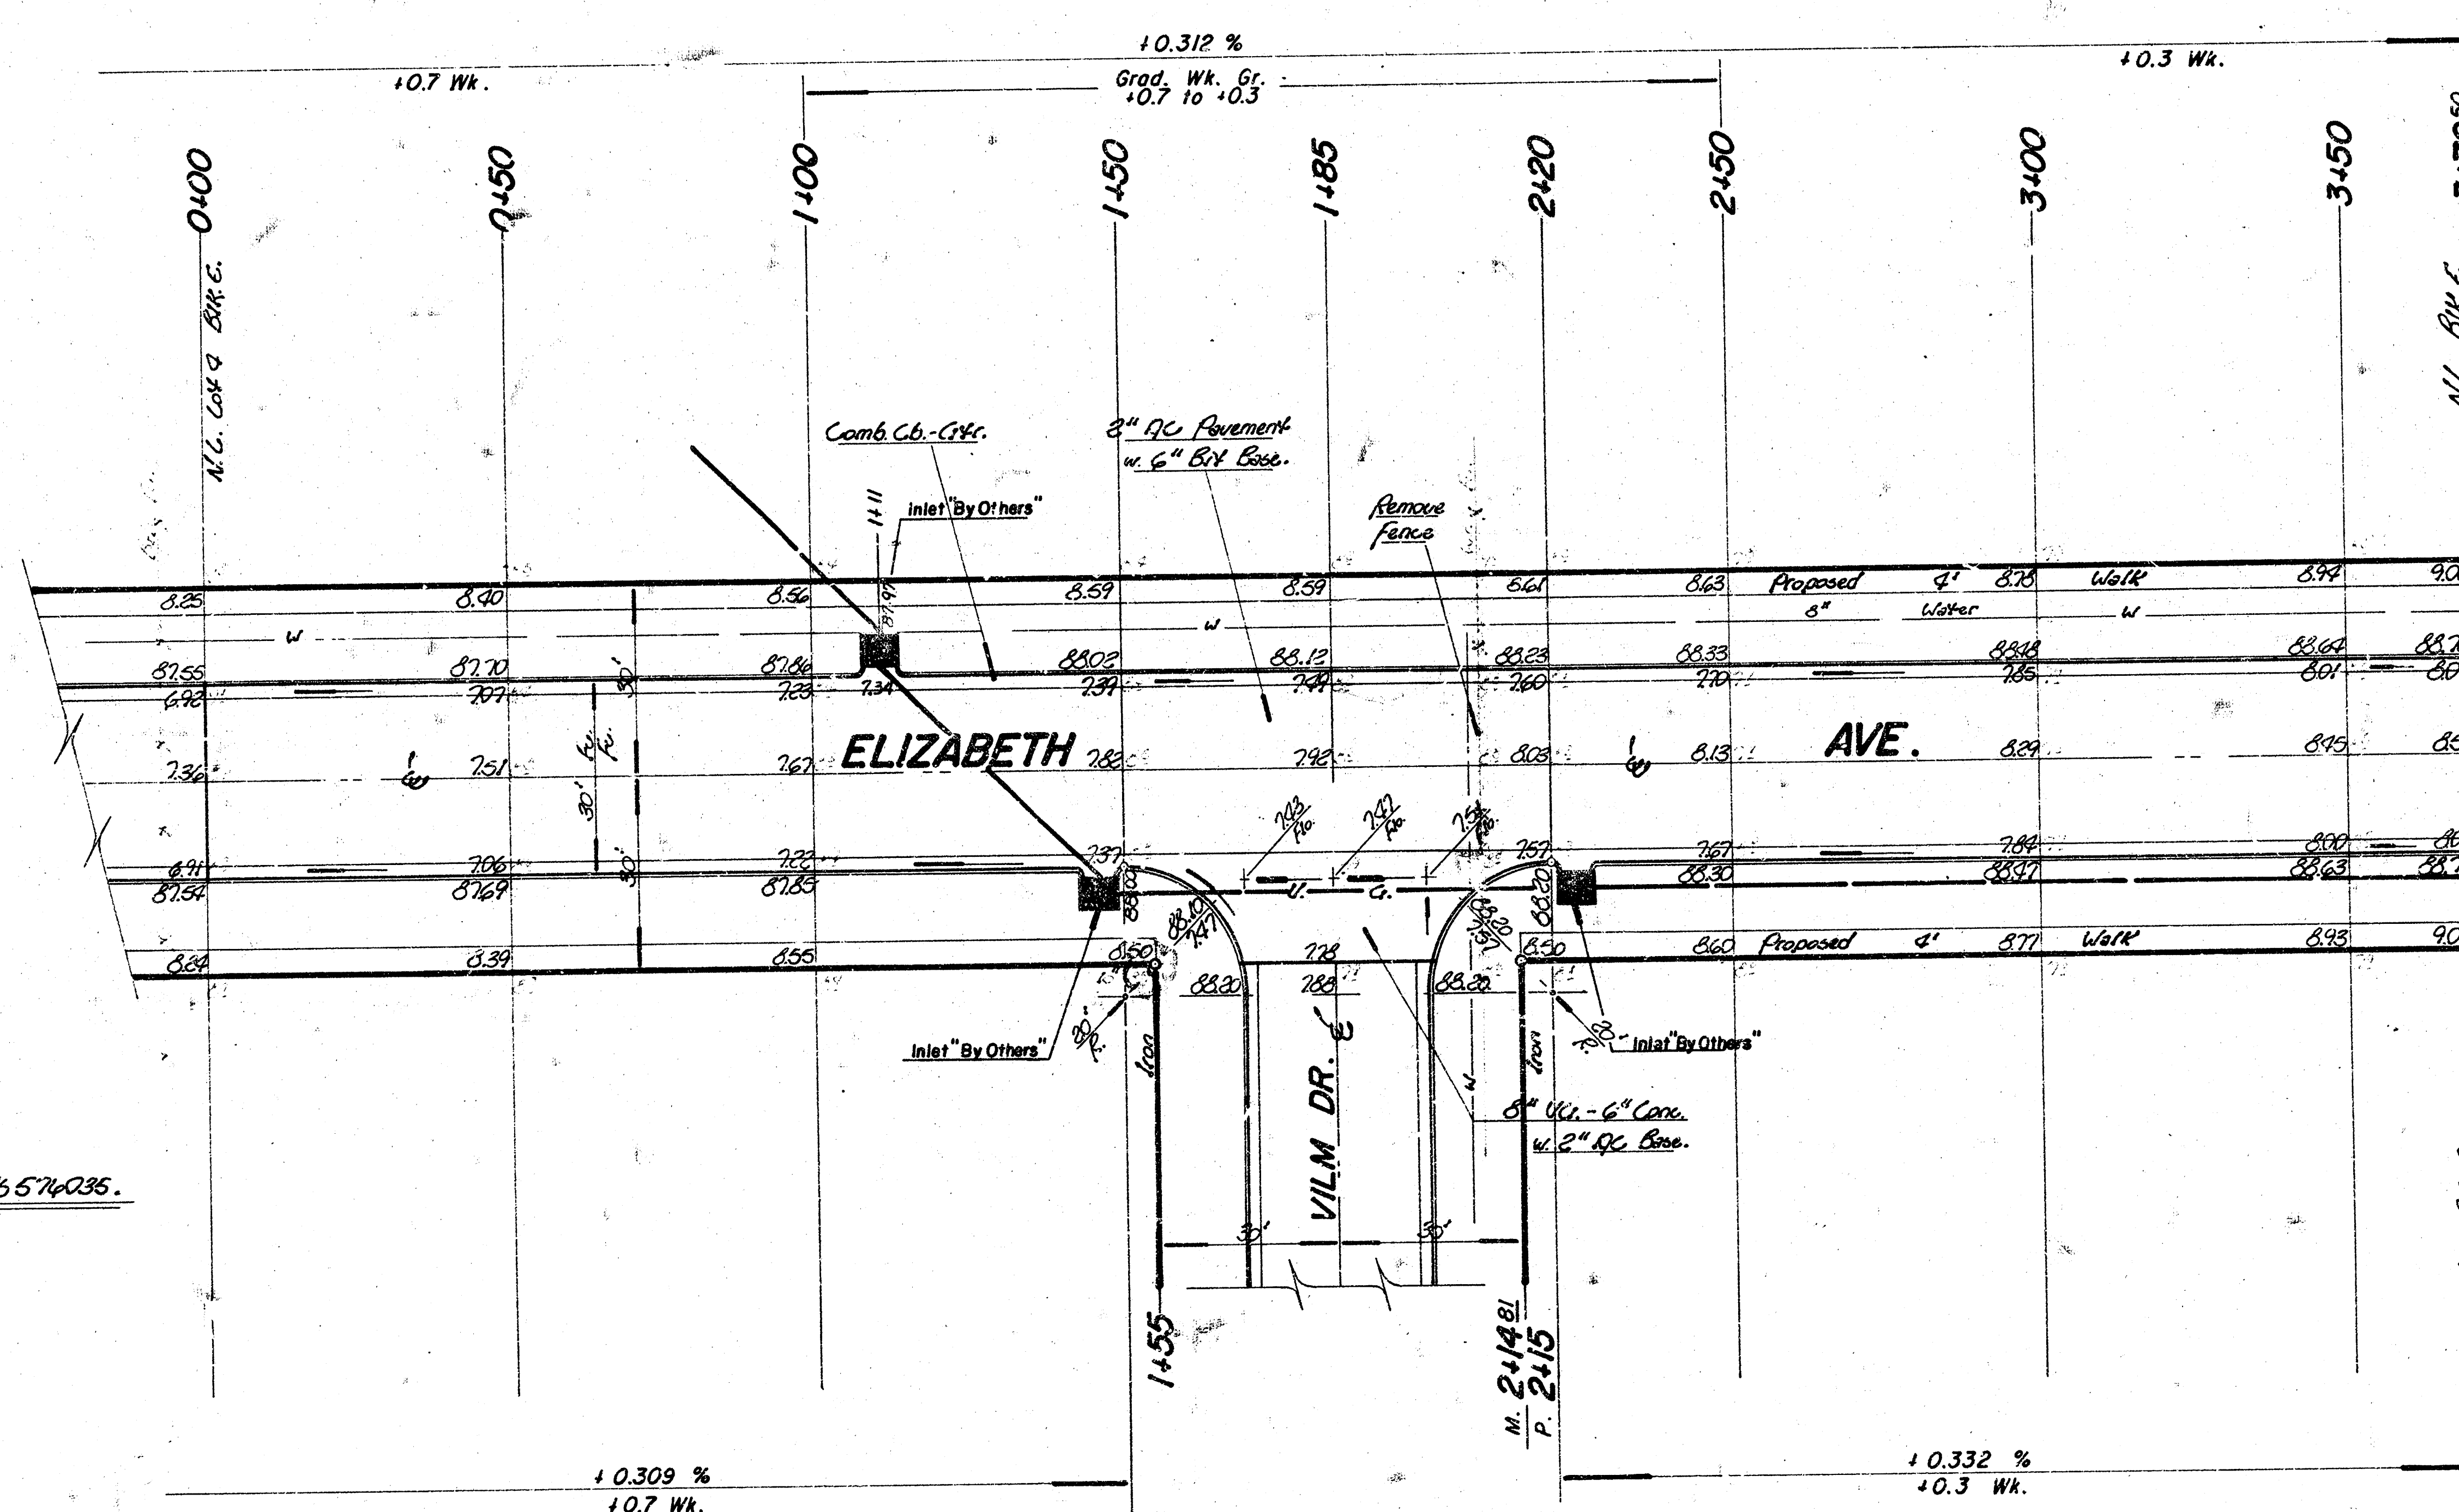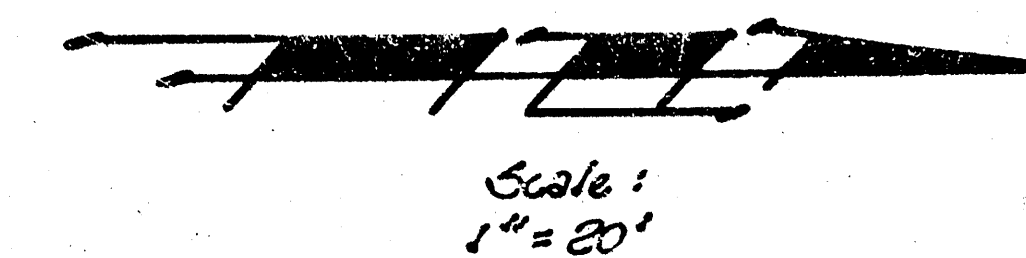

Sta. 0+00 on this Project
= Sta. 5+53.50 on Project No. DAKS 577035.

Note:
Contractor to take ties & replace any "logs" either moved
or destroyed during construction.
--- Indicates fence removal.

Note: Excess Earthwork Material from Construction of Project No. 577035
is to be used for Construction of Project No. 577036.

Earthwork		Quantities	
Property	City	Excavation	Comp. Fill
Excavation = 611.8 cy.	Excavation = 74.8 cy	Excavation = 74.8 cy	Comp. Fill = 0
+ 10 % = 673.0 cy	+ 10 % = 82.3 cy	+ 10 % = 82.3 cy	
Total = 673.0 cy	Total = 82.3 cy	Total = 82.3 cy	
Manipulation = 1242.5 cy.	Manipulation = 175.8 cy.		

ELIZABETH AVE.
N.L. Lot 4, Blk. E to N.L. Blk. A & E, Vilm G. 2.
31' BB - 2" AC Pavmt. w 6" Bit Bs. - Comb. Cb.-G.
CITY OF WICHITA, KS.
Dean Sellers Acting City Engineer
Project No. DAKS 577035
472 76 245 80520 000 000 001
Date: _____

Survey
Plan
Exc
Checked