1986 ARTERIAL SIDEWALK

PROJECT NO.

472-76-245-81584-000-000-001

CITY OF WICHITA, KANSAS

MICHAEL E. LINDEBAK, CITY ENGINEER

PROJECT LOCATIONS

SOUTH SIDE CENTRAL AVENUE FROM WEST ST. TO McLEAN BLVD.

SOUTH SIDE 13TH. STREET. FROM ST. PAUL TO EDWARDS.

SOUTH SIDE 13TH. STREET. FROM MAIZE ROAD TO VALLEYVIEW.

WEST SIDE OF K-42 FROM KELLOGG TO McCORMICK

EXACT LOCATION AND GRADE TO BE DETERMINED BY THE FIELD ENGINEER AT TIME OF CONSTRUCTION.

ALL EARTHWORK AND SUBGRADE COMPACTION NECESSARY TO COMPLETE THIS PROJECT IS TO BE SUBSIDIARY TO OTHER BID ITEMS.


ALL AREAS DISTURBED BY THE CONTRACTOR SHALL BE RESTORED TO A CONDITION ACCEPTABLE TO THE ENGINEER. THIS WORK SHALL BE SUBSIDIARY TO OTHER BID ITEMS.

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	MISCELLANEOUS DETAILS

DONALD E. SCHNEIDER LICENSED 6311 KANSAS PROFESSIONAL ENGINEER



NOTE: ANY FENCE REMOVED IS TO BE SALVAGED AND GIVEN TO THE ADJACENT PROPERTY OWNER.

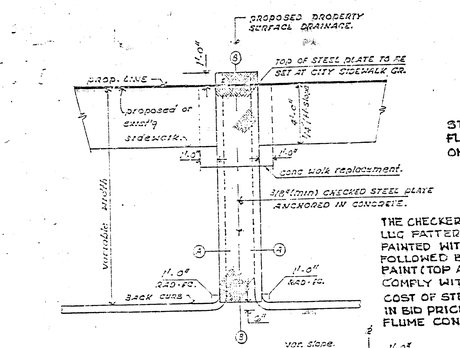


STEEL PLATE TO BE ANCHORED WITH 1/4" x 2 1/4" FLAT HEAD SCREWS WITH EXPANSION ANCHOR ON 2'-0" MAXIMUM CENTERS.

THE CHECKERED STEEL PLATE SHALL HAVE A RAISED LUG PATTERN AND SHALL BE EITHER SHOP OR FIELD PAINTED WITH ONE COAT OF ZINC DUST PAINT FOLLOWED BY TWO FIELD COATS OF ALUMINUM PAINT (TOP AND BOTTOM. STEEL USED SHALL COMPLY WITH ASTM A-36, A-242, OR A-441.

COST OF STEEL PLATE & PAINTING TO BE INCLUDED IN BID PRICE FOR L.F. STD. COVERED CONCRETE FLUME CONSTRUCTION.

COST OF ALL WORK INCLUDED IN THE BID PRICE FOR STD. COVERED FLUME CONSTRUCTION SHALL INCLUDE REMOVING AND RE CONSTRUCTING EXIST'G CURB & GUTTER, COMPACTION OF SUBGRADE AND NECESSARY AREA GRADING.


CONCRETE FLUME DETAIL (Thru Street Parking)

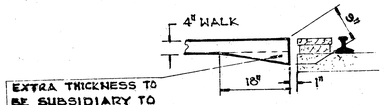


EXTRA THICKNESS TO BE SUBSIDIARY TO 4" WALK BID.

SIDEWALK DETAIL AT RAILROAD TRACK


STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR CONCRETE STREETS WITH MONOLITHIC CURB AND FULL WALK

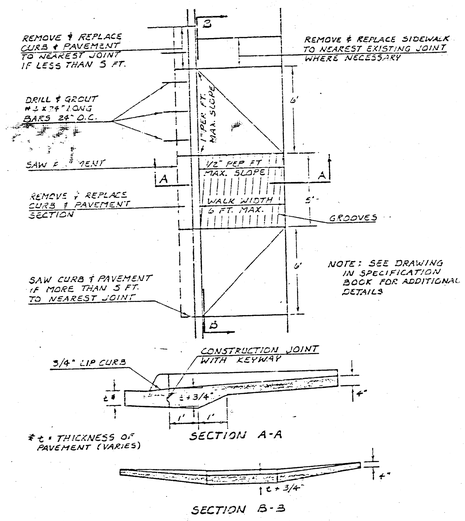

STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR STREET WITH COMBINED CURB AND GUTTER ON RADIUS WITH 6'± FROM BACK OF CURB TO PROPERTY CORNER

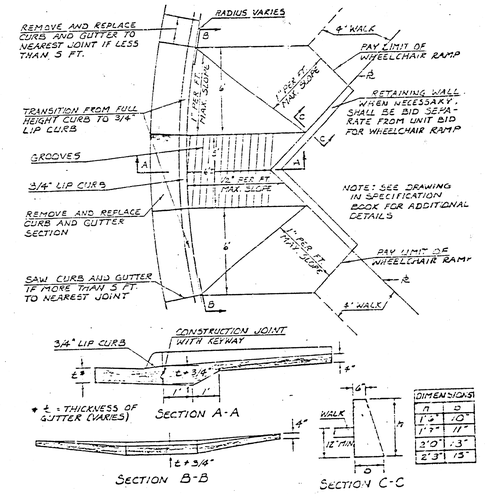


STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR STREETS WITH COMBINED CURB & GUTTER AND FULL WALK

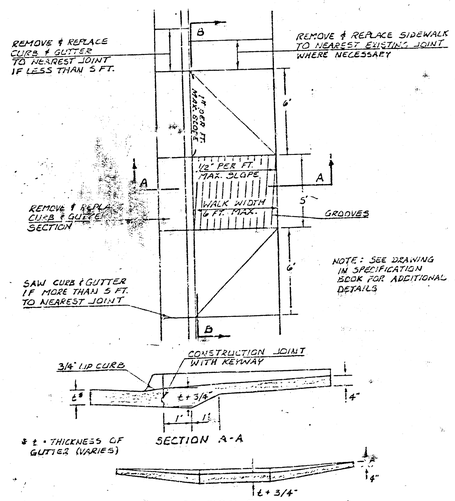


NOTE: The cost of all work indicated on this sheet shall be included in the unit price bid for wheel chair ramp which price shall include all costs of removing and reconstructing existing combined curb and gutter, compaction of subgrade and necessary area grading.

STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR CONCRETE STREETS WITH MONOLITHIC CURB

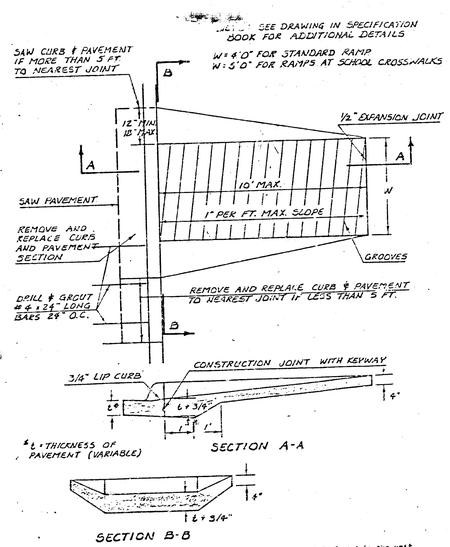


NOTE: The cost of all work indicated on this sheet shall be included in the unit price bid for wheel chair ramp which price shall include all costs of removing and reconstructing existing Pavement and monolithic curb, compaction of subgrade and necessary area grading.

STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR STREETS WITH COMBINED CURB & GUTTER

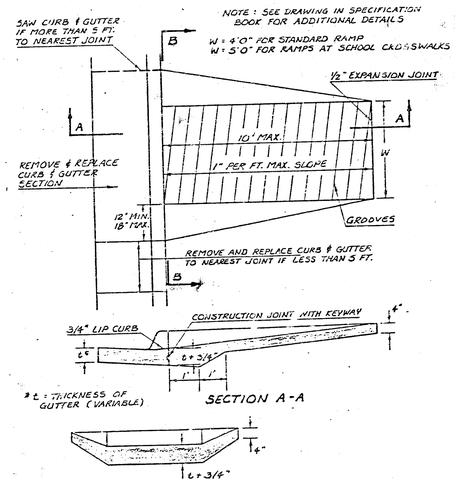

NOTE: The cost of all work indicated on this sheet shall be included in the unit price bid for wheel chair ramp which price shall include all costs of removing and reconstructing existing combined curb and gutter, compaction of subgrade and necessary area grading.

STANDARD WHEELCHAIR RAMP CONSTRUCTION DETAIL FOR CONCRETE STREETS WITH MONOLITHIC CURB ON RADIUS WITH 6'± FROM BACK OF CURB TO PROPERTY CORNER

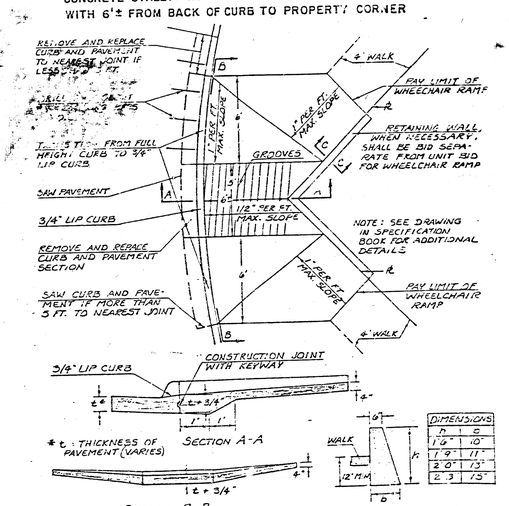

MISCELLANEOUS DETAILS

1986 ARTERIAL SIDEWALK

PROJECT No. 472-76-245-81584-000-000-001