


9th ST
E-L West ST to W-L ZOO BLVD

Proj NO 472-76-245-80829-000-000-001

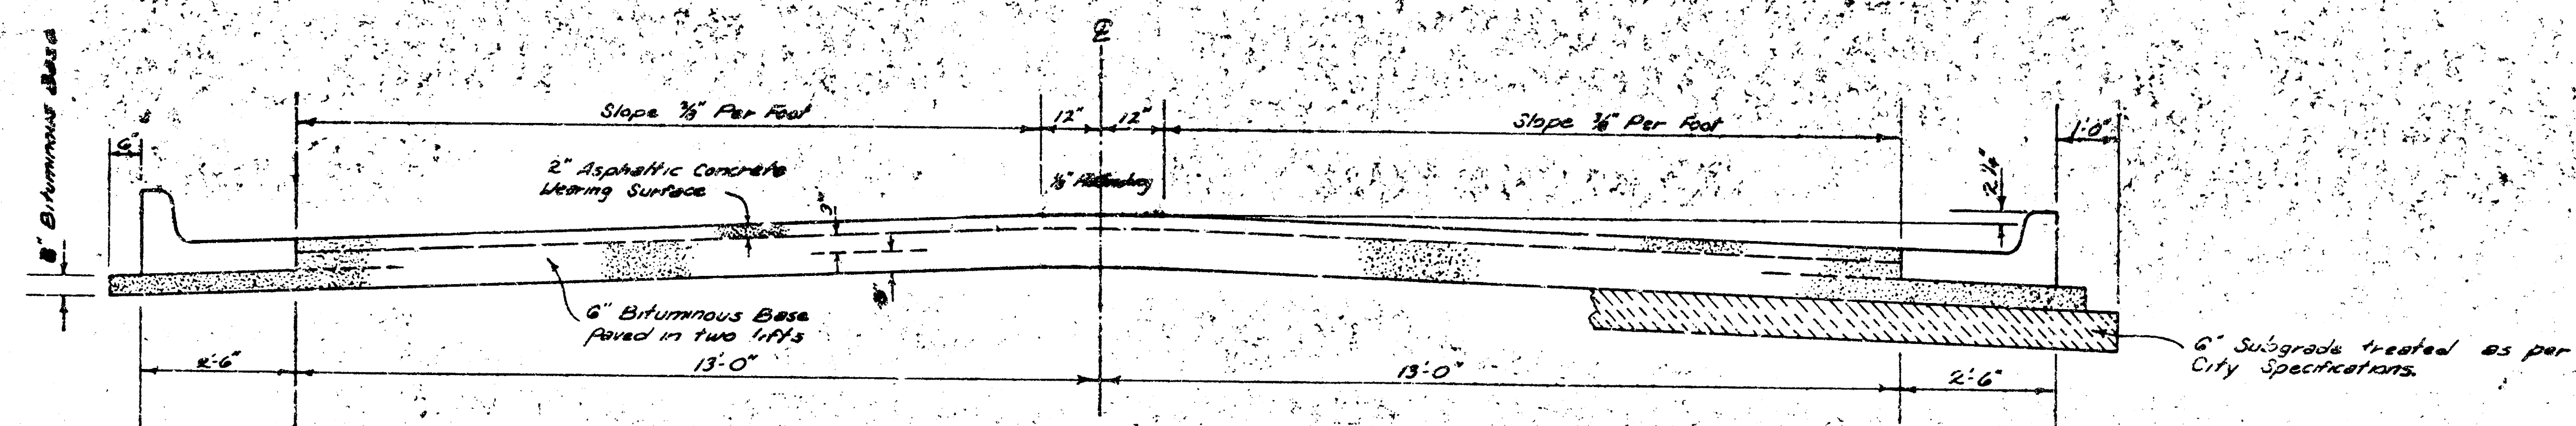

TYPICAL SECTION


31' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE, HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


The A.C. pavement between the Comb. Curb & Gutter shall be paid as 31' A.C. Pavement (6" Bituminous Base). The Bituminous Base under the Comb. Curb & Gutter shall be paid as 31' 3" Bituminous Base.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

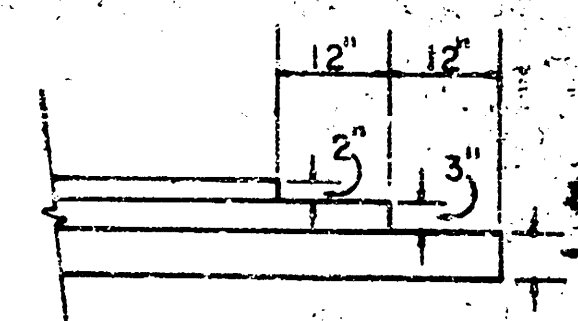


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

COMBINED CURB & GUTTER

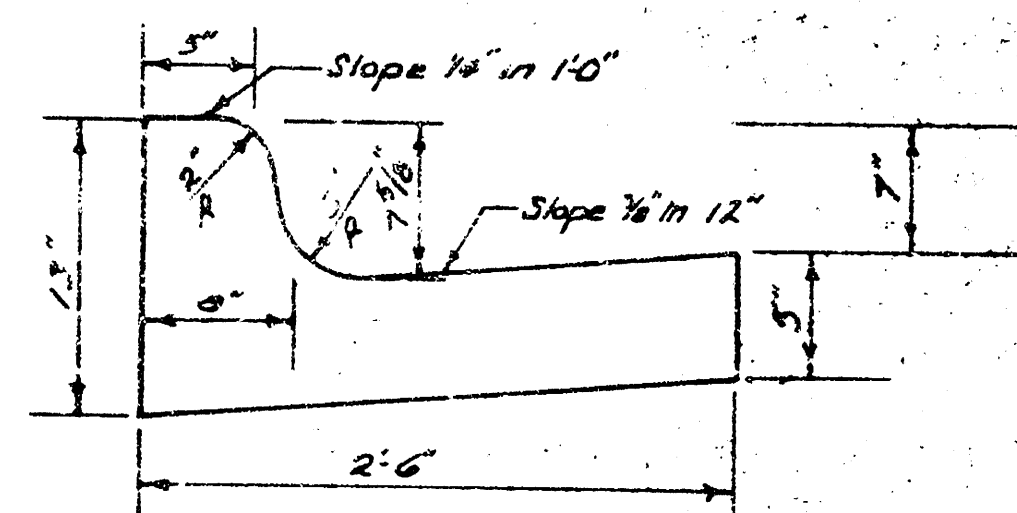

ROLL TYPE CURB & GUTTER

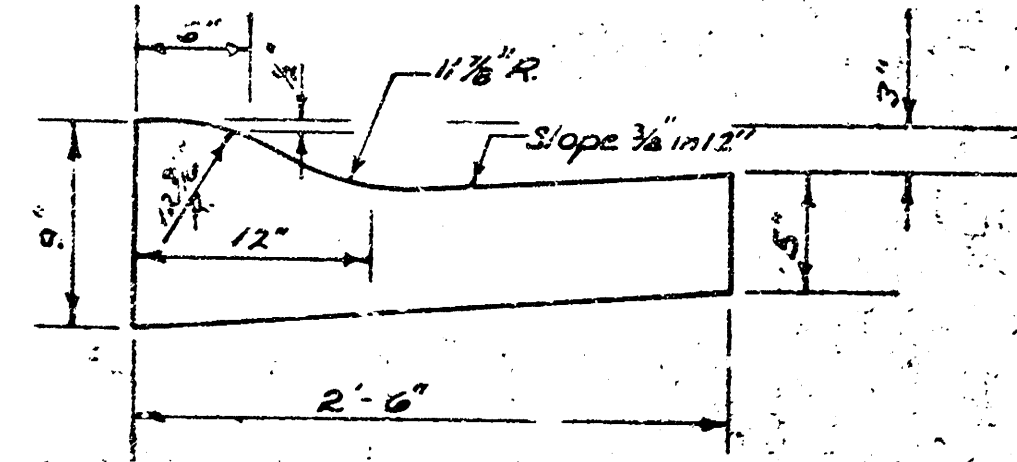

CITY OF WICHITA, KANSAS


DEPARTMENT OF PUBLIC WORKS -- ENGINEERING

DEAN SELLERS Acting CITY ENGINEER

DATE: _____ PROJ. NO. 472-76-245-80829-000-000-001

FILMED FROM THE BEST

B.M. = 121.89 City ST d. SW Cor 9th & West - 24' S & 52' W ϕ both
 B.M. = 123.70 SE Cor Porch Ho = 38' 6" West 9th ST - N
 B.M. = 125.25 d. Ctr 4' WK E Adj to E. Ch ZOO at N Line 9th ST.
 Base Line is Ctr of 9th ST.

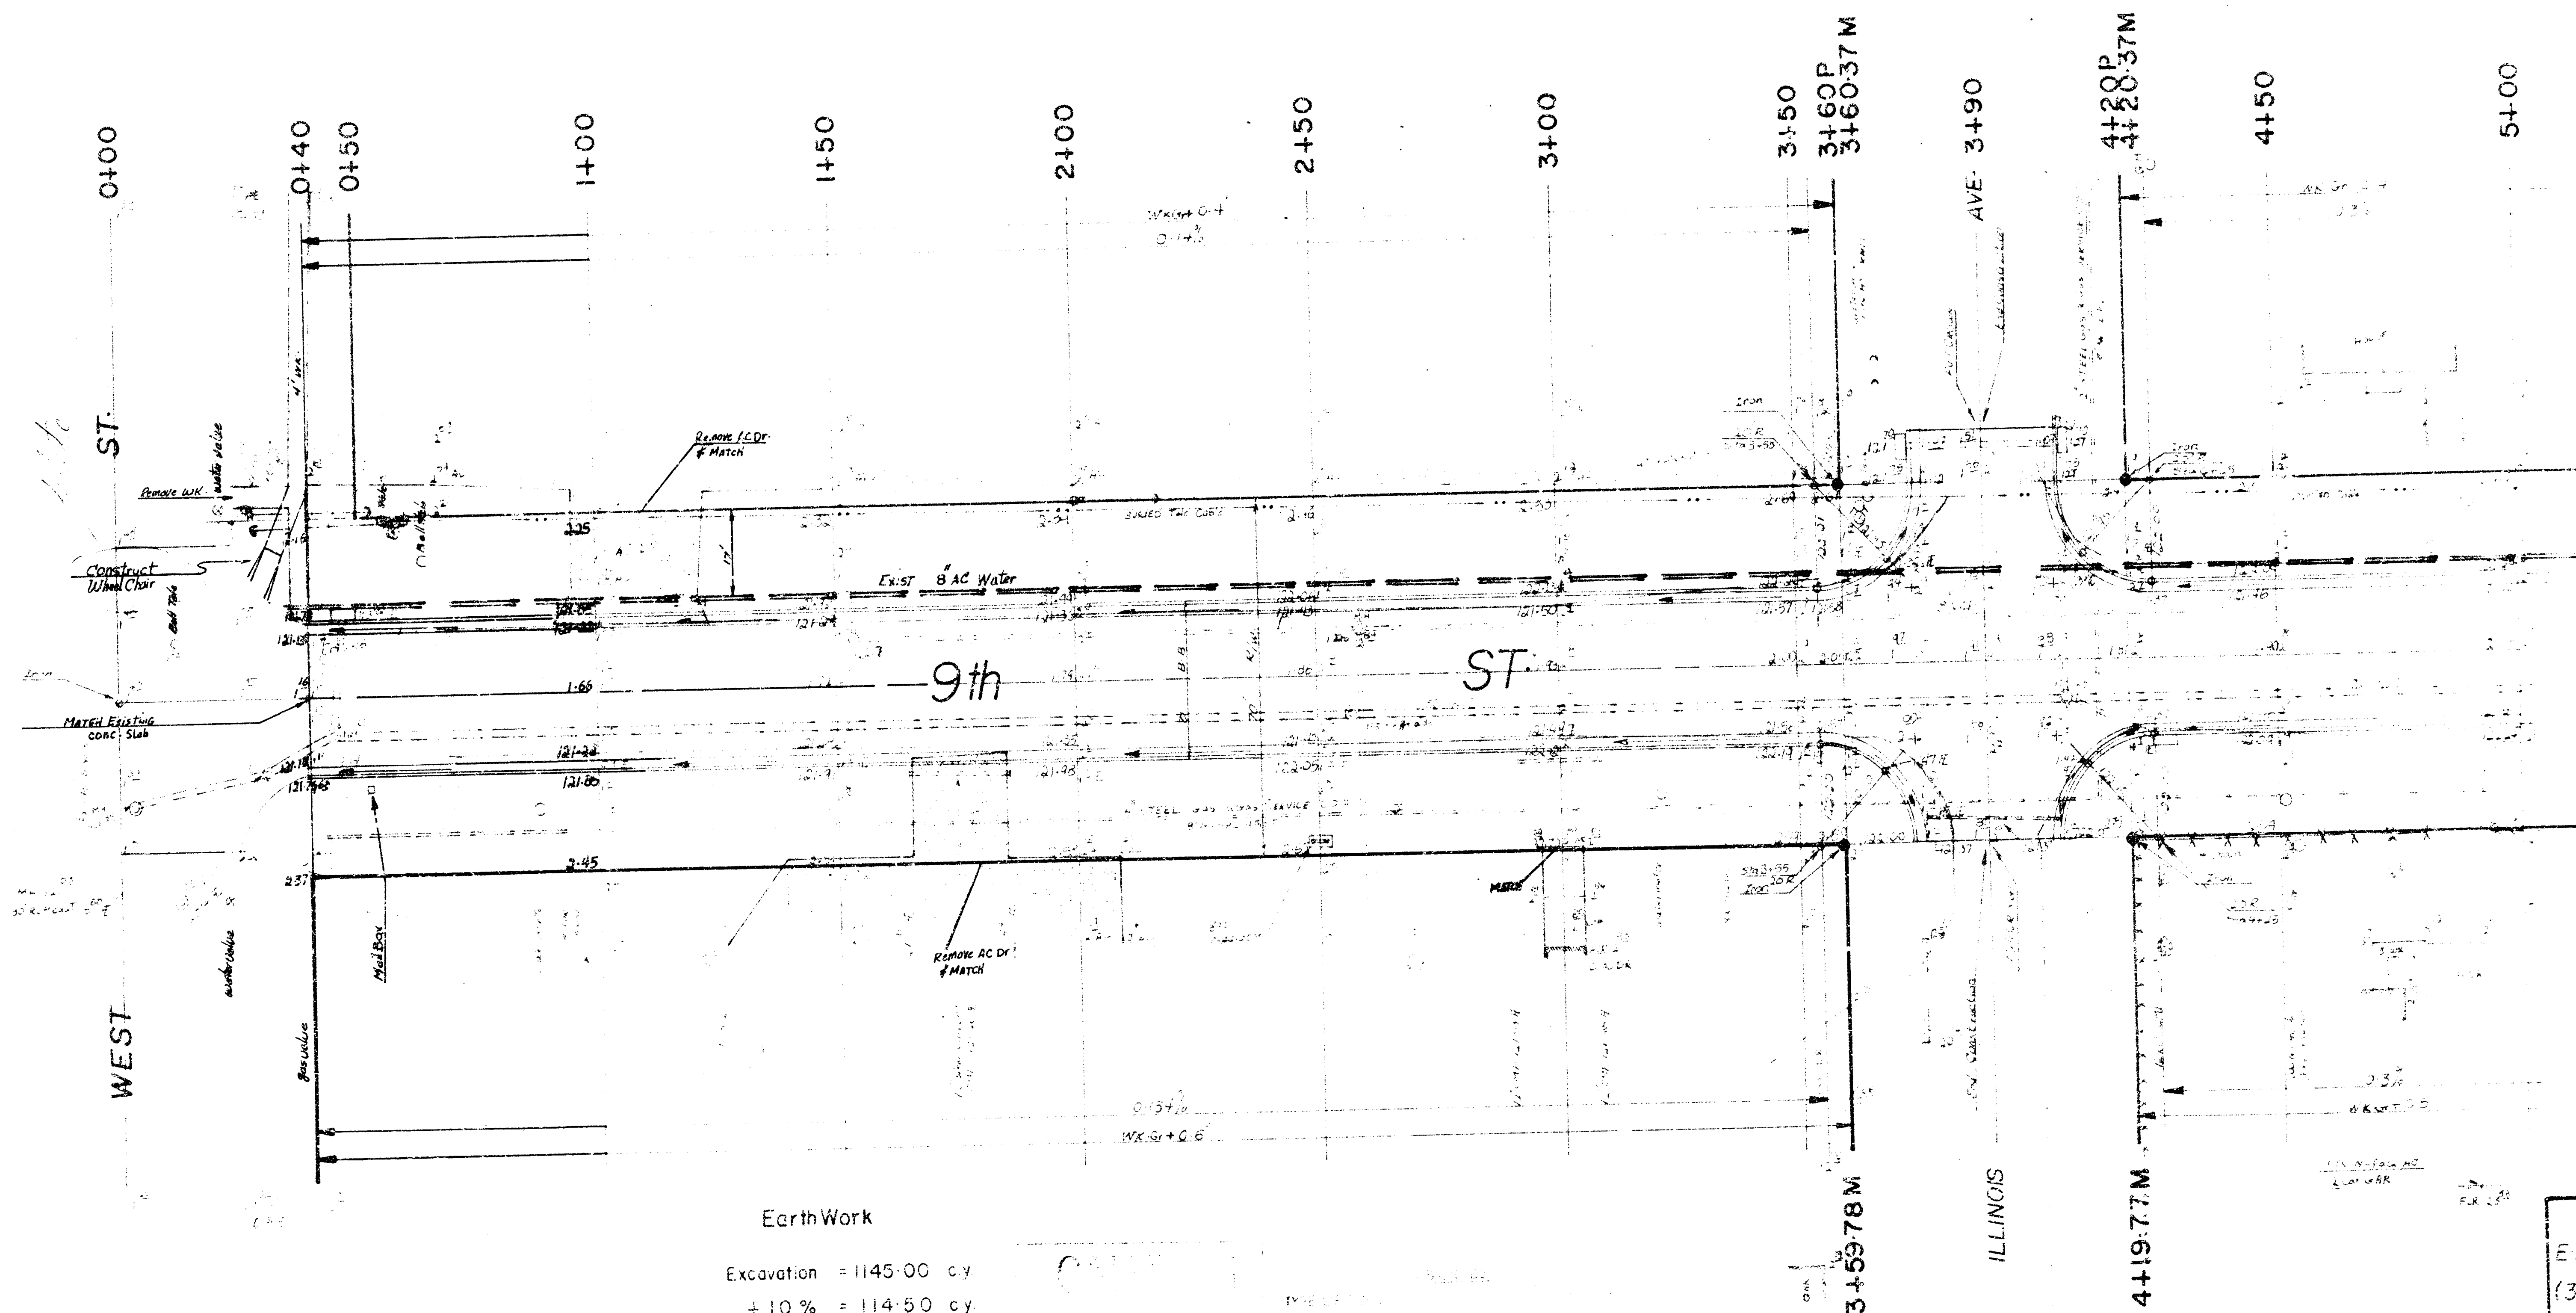


N
 Scale 1" = 20'

EarthWork
 Excavation = 1145.00 cy
 + 10% = 114.50 cy
 total = 1259.50 cy
 Comp Fill = 2.57 cy
 + 10% = 2.55 cy
 total = 28.12 cy
 Manipulation = 2876.00 s.y

NOTE: NO LINE & cement Treatment.

9th ST.
 EL West ST TO W.L. ZOO BLVD
 (31' B-B A.C. Pavt/Comp Cb & Gutter.)
 CITY of WICHITA, KANSAS
 Dean Sellers Acting City Engineer
 proj NO
 472-76-245-80929-000-000-001
 Date

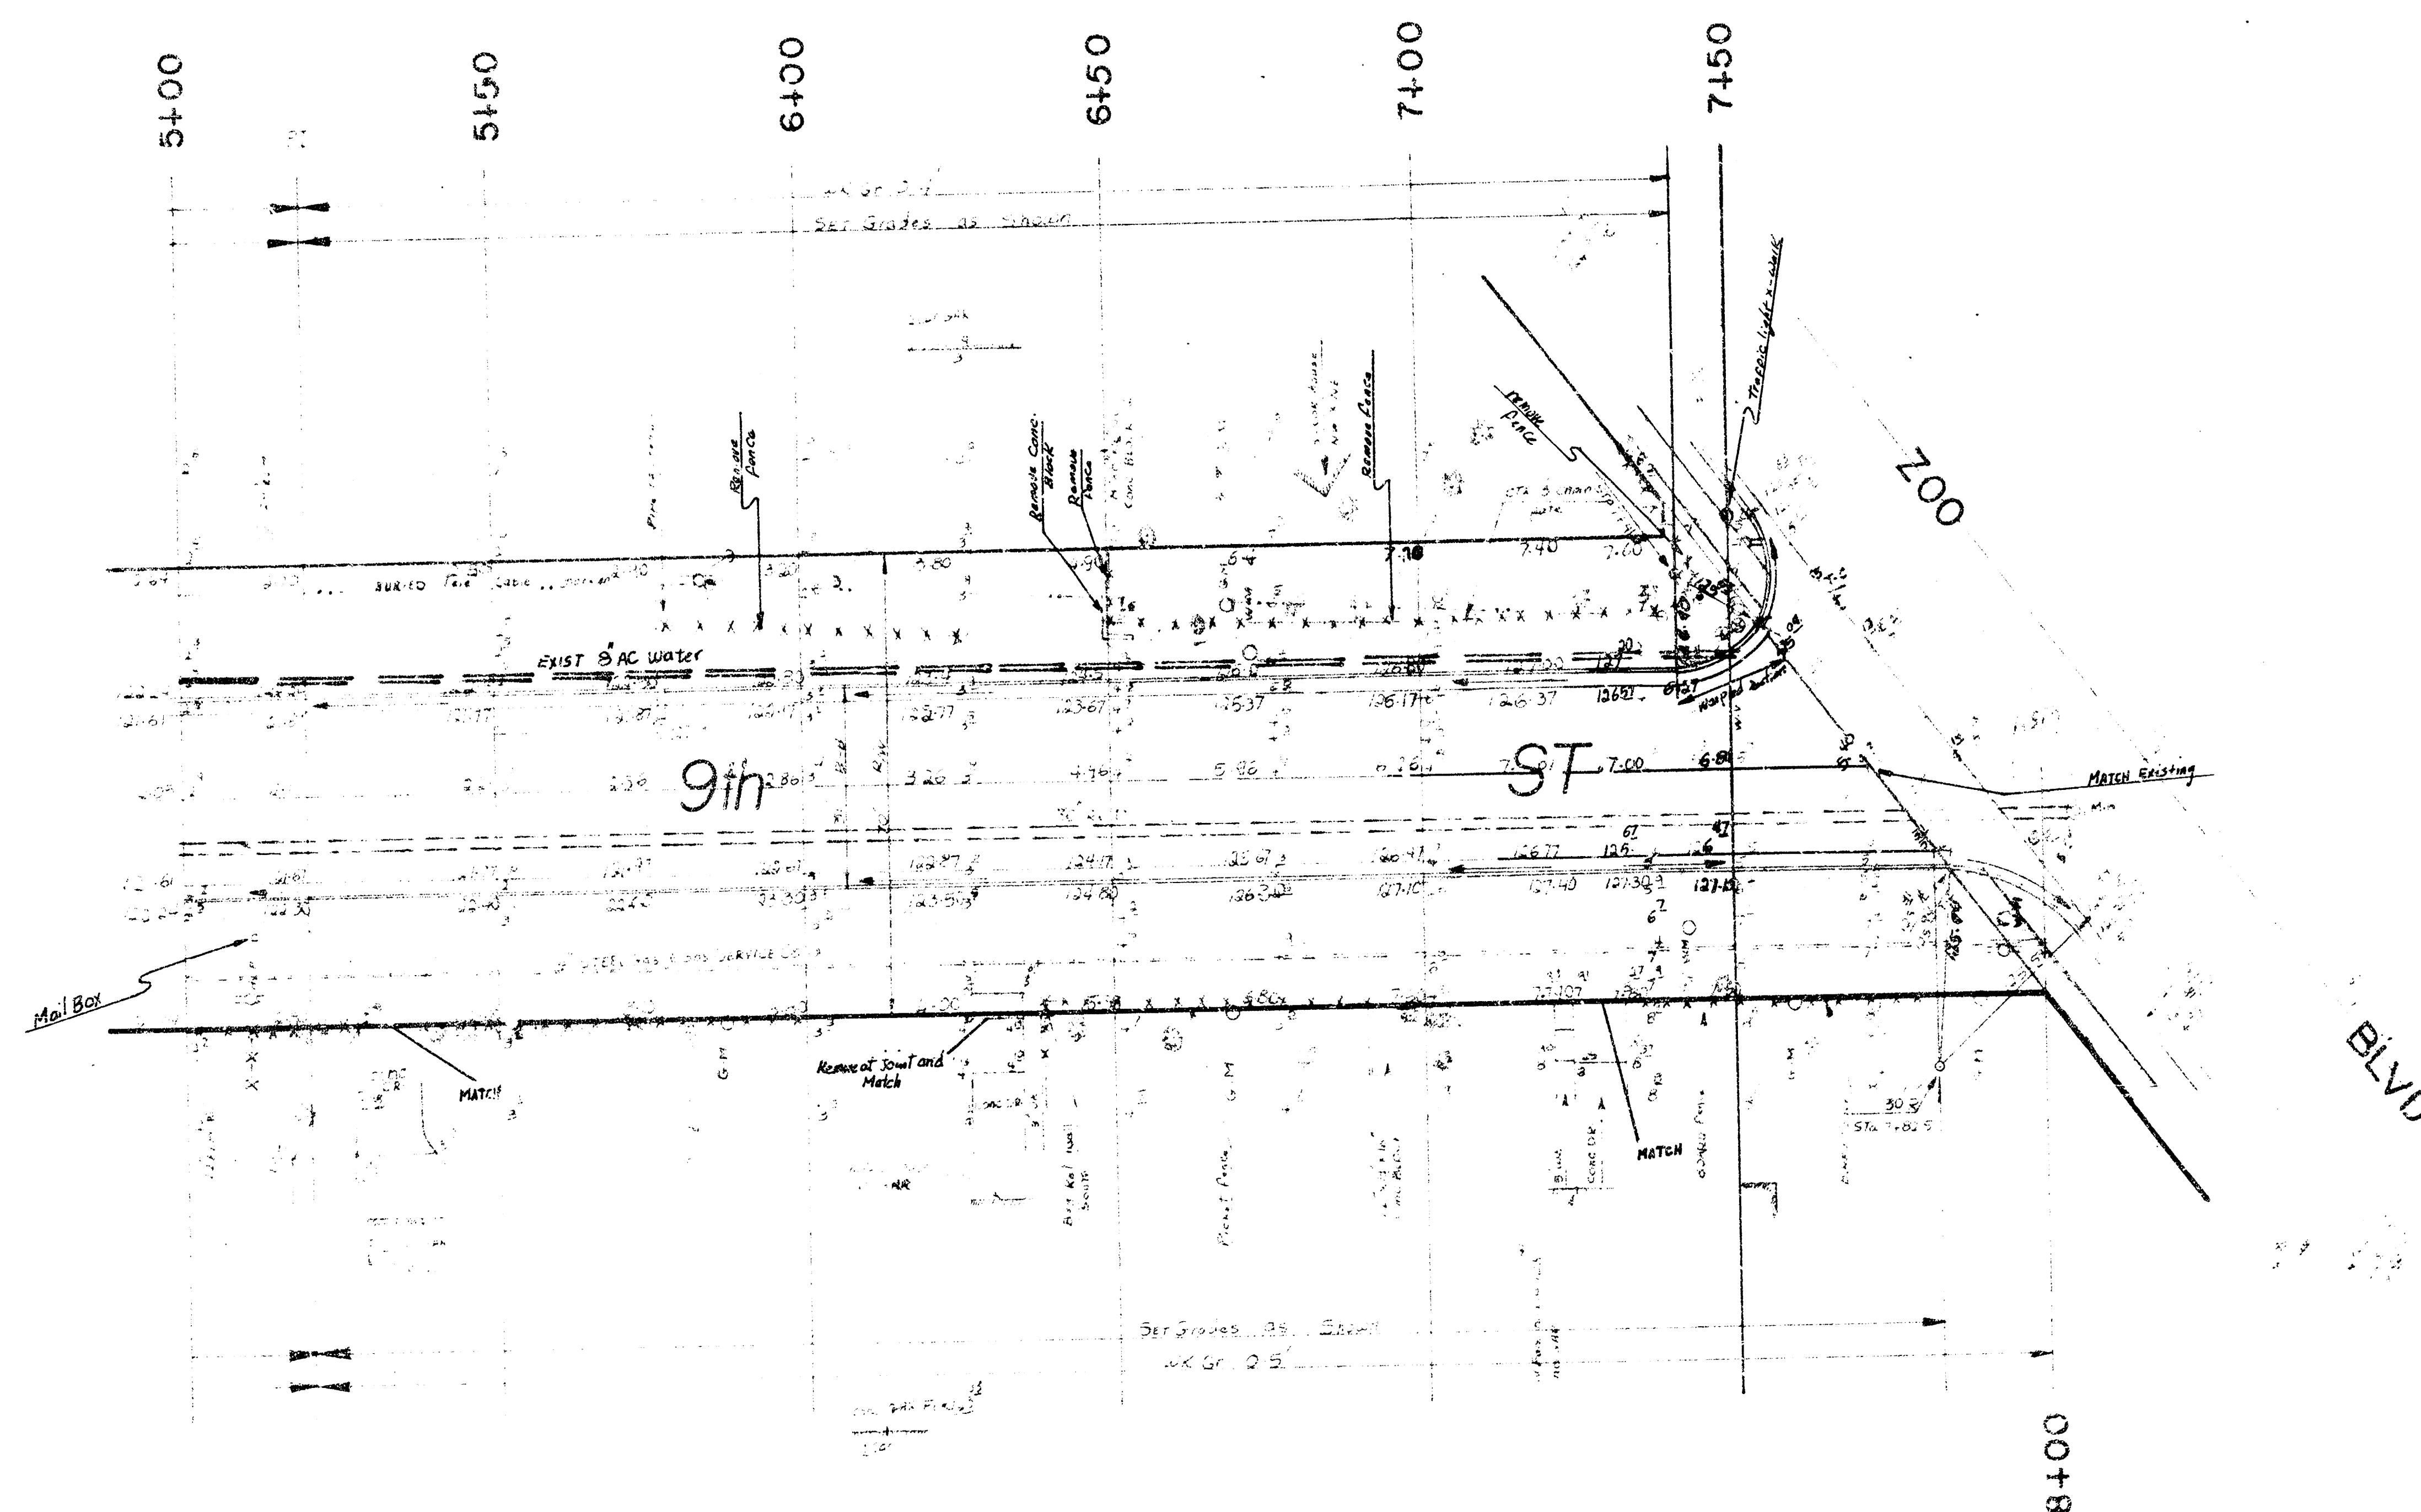


 Scale 1" = 20'

9th ST
 E-L West ST to W-L Zoo BLVD
 472-76-245-80829-000-000-001

3/3