


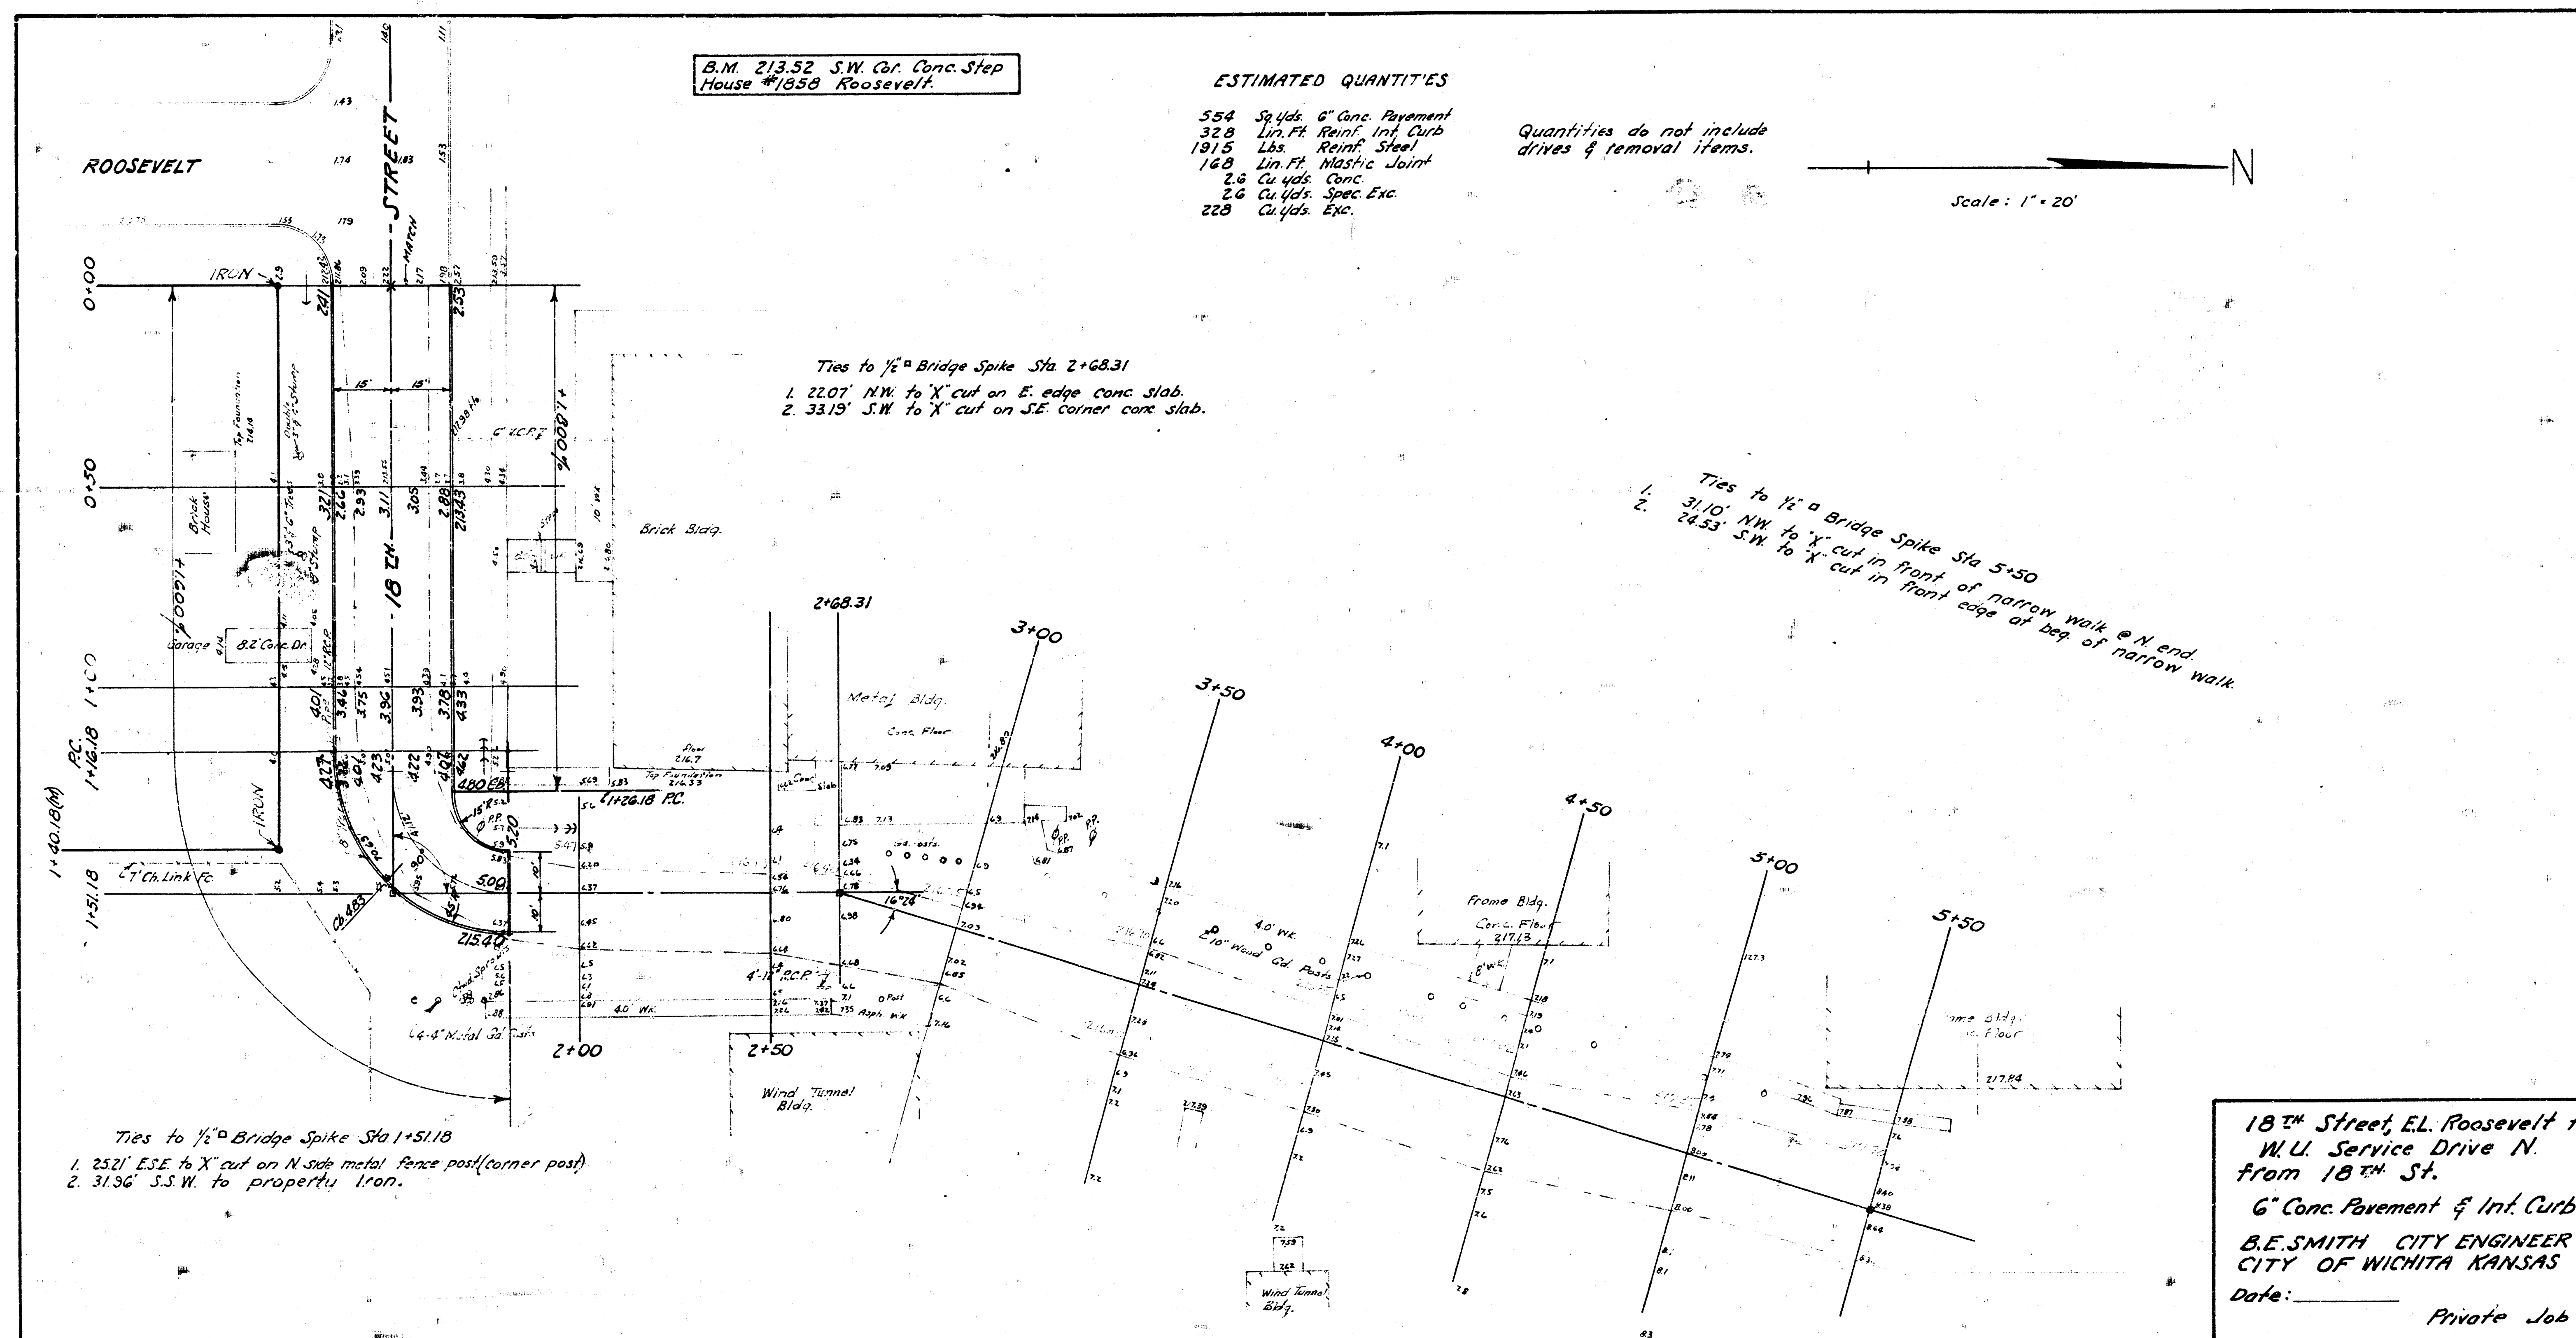

B.M. 213.52 S.W. Cr. Conc. Step House #1850 Roosevelt.

ESTIMATED QUANTITIES

- 554 Sq. Yds. 6" Conc. Pavement
- 328 Lin. Ft. Reinf. Int. Curb
- 1915 Lbs. Reinf. Steel
- 168 Lin. Ft. Nastic Joint
- 26 Cu. Yds. Conc.
- 26 Cu. Yds. Spec. Exc.
- 228 Cu. Yds. Exc.

Quantities do not include drives & removal items.

Scale: 1" = 20'

Ties to 1/2" Bridge Spike Sta. 2+68.31
 1. 22.07' NW to 'X' cut on E. edge conc. slab.
 2. 33.19' S.W. to 'X' cut on S.E. corner conc. slab.

Ties to 1/2" Bridge Spike Sta. 5+50
 1. 31.10' NW to 'X' cut in front of narrow walk @ N end.
 2. 24.53' S.W. to 'X' cut in front edge of beg. of narrow walk.

Ties to 1/2" Bridge Spike Sta. 1+51.18
 1. 25.21' ESE to 'X' cut on N. side metal fence post (corner post)
 2. 31.36' S.S.W. to property line.

Conc. Slab
 Metal Track