


ALTER, REPAIR, RECONSTRUCT OR CONSTRUCT A SEWER TO SUPPLEMENT ST. JOSEPH HOSPITAL SANITARY SEWER TO THE THE CITY OF WICHITA, SEDGWICK COUNTY, KANSAS

INDEX OF SHEETS	
SHEET NO. 1	TITLE SHEET
SHEET NO. 2	KEY MAP
SHEET NO. 3	PLAN/PROFILE

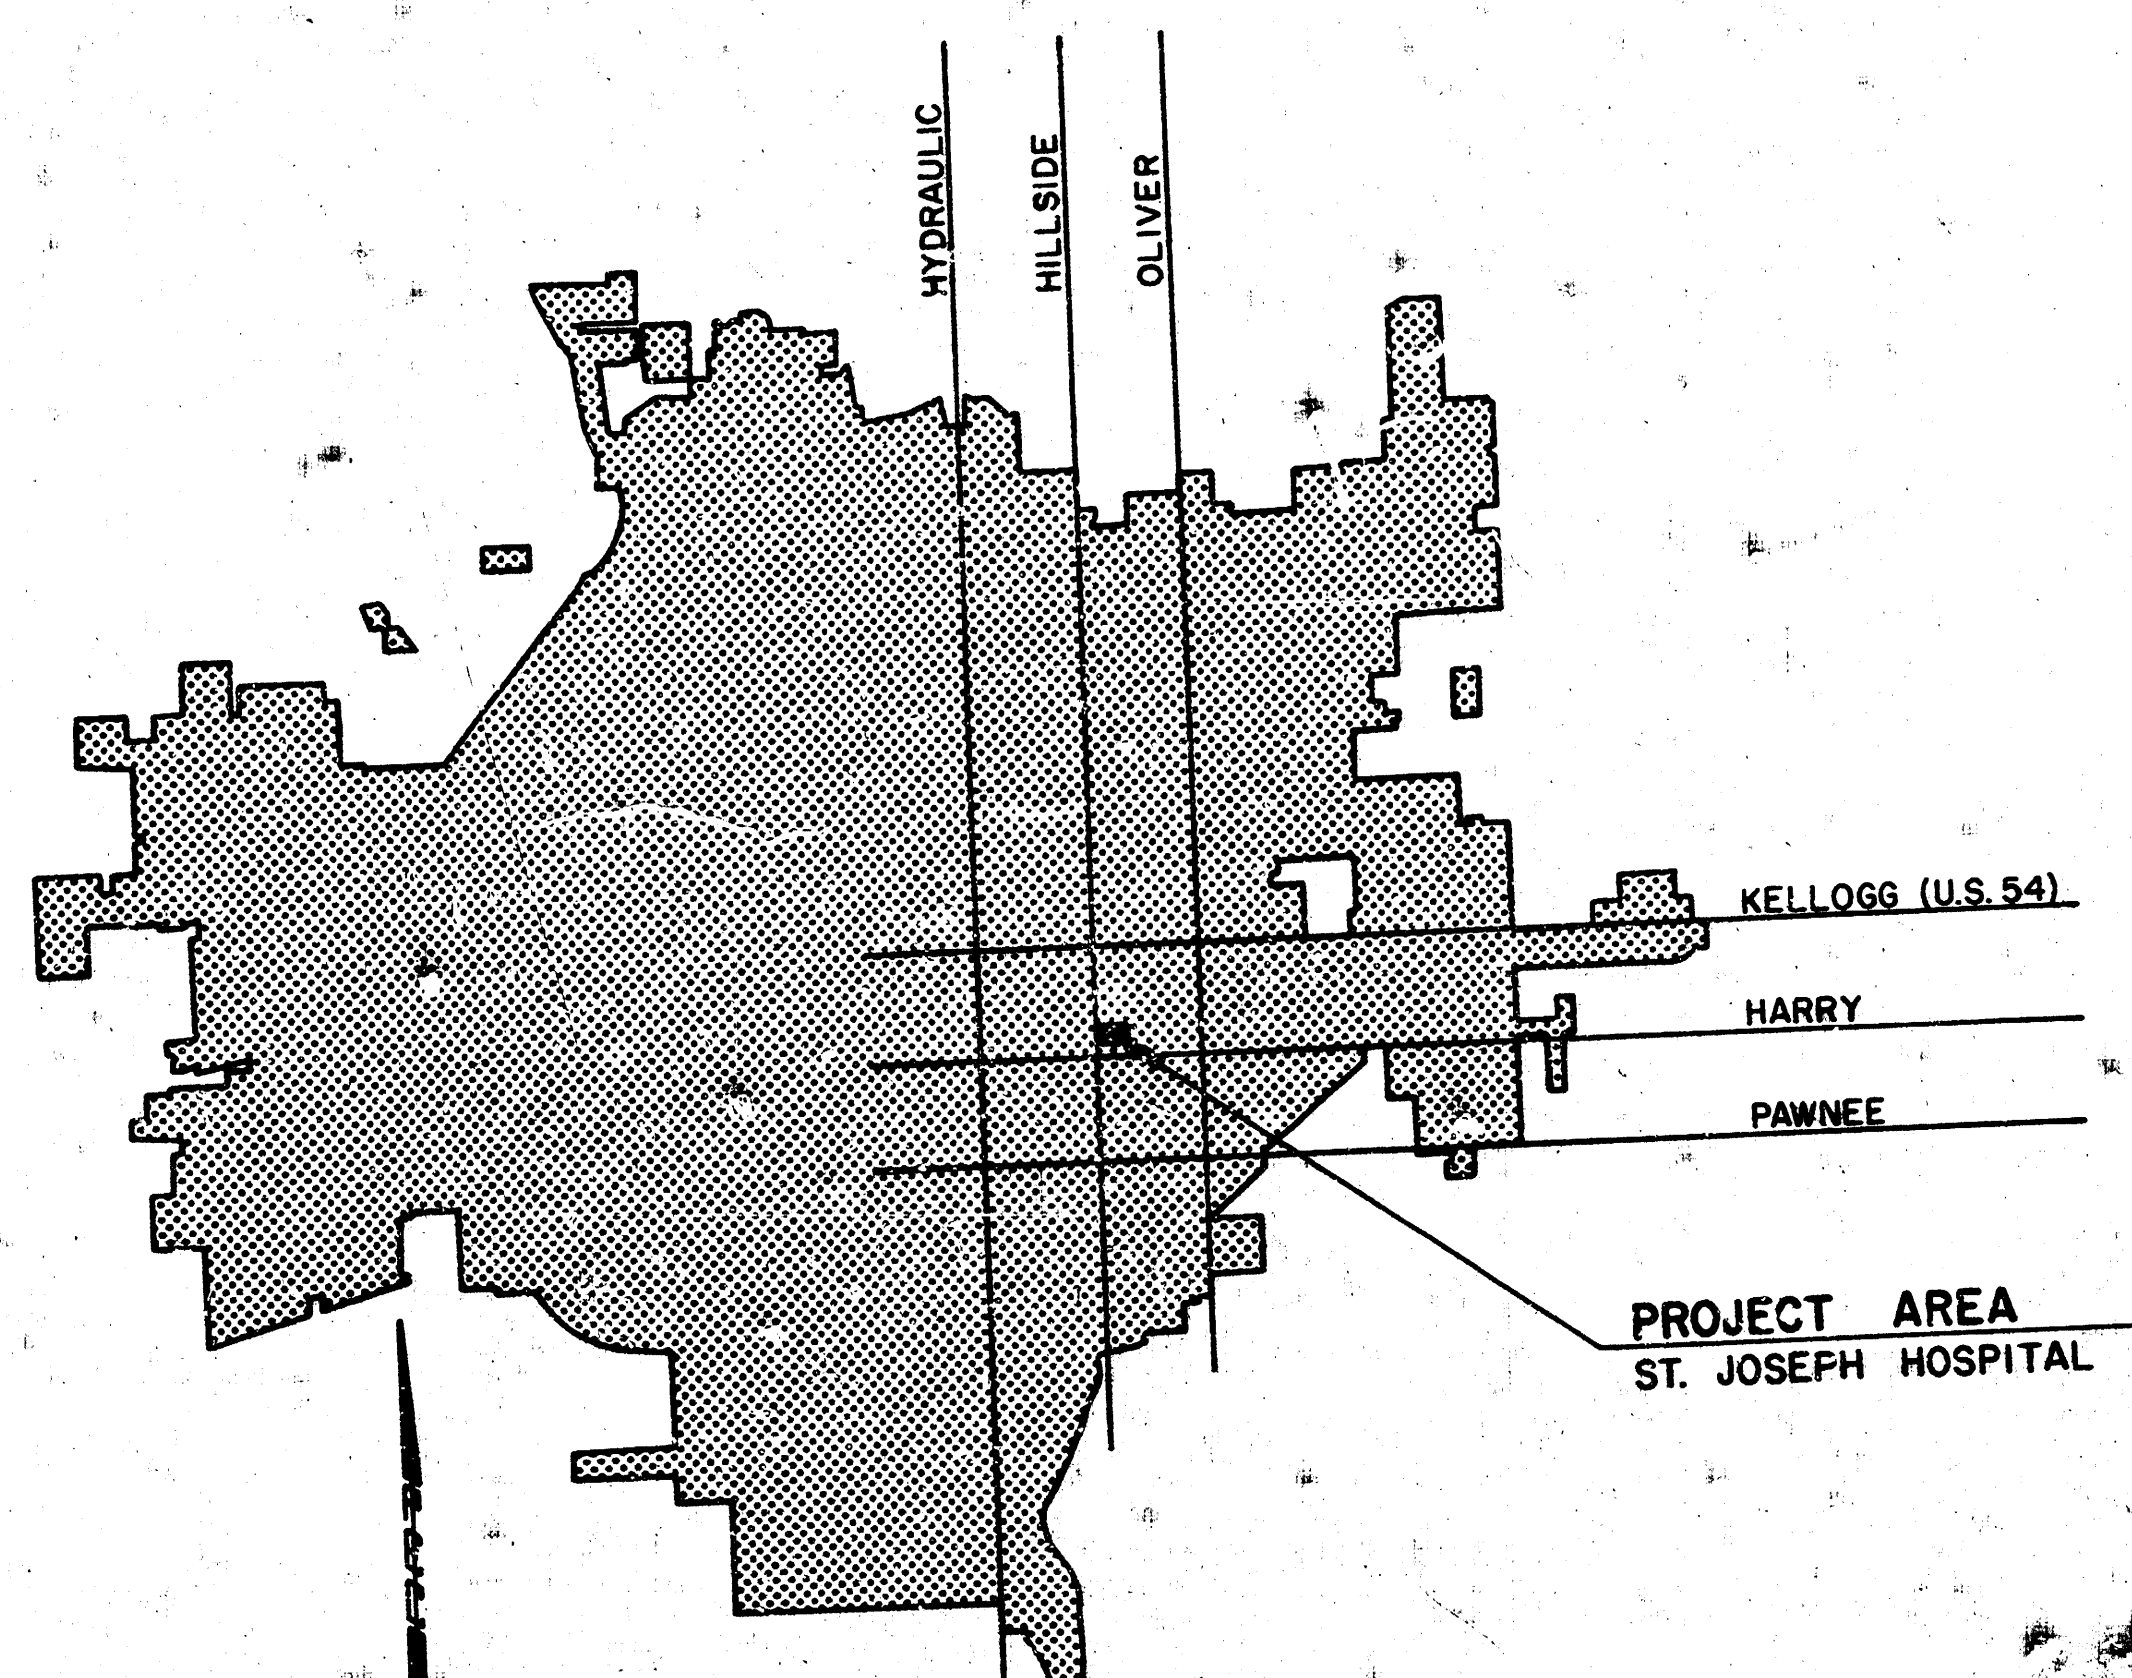


LOCATION MAP

CITY OF WICHITA PROJECT NO. 468-76-245-81340-000-000-001

OCTOBER, 1984

PLANS PREPARED BY

PROFESSIONAL ENGINEERING CONSULTANTS, P.A.
ENGINEERS
WICHITA, KANSAS

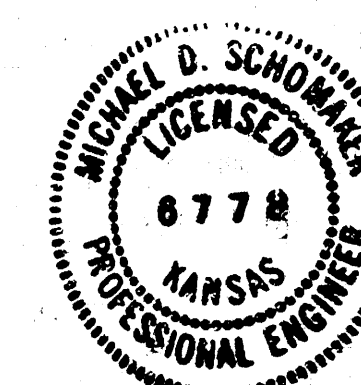


GENERAL NOTES

- ALL CONSTRUCTION AND MATERIALS TO COMPLY WITH CITY OF WICHITA SPECIFICATIONS AND STANDARDS.
- ALL ELEVATIONS SHOWN ARE CITY OF WICHITA DATUM (USGS-1187.4 = CITY DATUM).
- THE CONTRACTOR SHALL LIMIT THE EXTENT OF TRENCH TO REMAIN OPEN OVERNIGHTS AND WEEKENDS TO LESS THAN 50 FEET.
- AT LEAST 24 HOURS PRIOR TO BEGINNING EXCAVATION (EXCLUDING WEEKENDS AND HOLIDAYS), THE CONTRACTOR SHALL CONTACT THE UTILITY LOCATION SERVICE "KAR-U-DIG-IT" AT (316) 267-2889 TO REQUEST THE FOLLOWING UTILITY COMPANIES TO LOCATE ANY EXISTING LINES WITHIN THE PROJECT AREA: SAS SERVICE COMPANY, K.G. & E., SOUTHWESTERN BELL TELEPHONE COMPANY, THE WICHITA WATER DEPARTMENT, AND AIR CAPITAL CABLEVISION.
- THE BURIED UTILITIES AS LOCATED ON THE PLANS ARE APPROXIMATE LOCATIONS ONLY. IT SHOULD BE NOTED THAT OTHER BURIED LINES AND CABLES MAY EXIST WHICH ARE NOT SHOWN ON THESE PLANS. THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION DURING TRENCHING OPERATIONS TO AVOID DAMAGING THESE LINES. ANY LINES DAMAGED SHALL BE REPLACED OR REPAIRED IMMEDIATELY AS DIRECTED BY THE ENGINEER AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR SHALL RESTORE ALL ROADWAYS, ENTRANCES, AND GROUND LINES TO THEIR ORIGINAL SLOPES AND GRADES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PRESERVING PROPERTY IRONS. THE CONTRACTOR SHALL BE REQUIRED TO RE-ESTABLISH ANY PROPERTY IRONS WHICH ARE DAMAGED OR DESTROYED BY HIS CONSTRUCTION OPERATIONS. SUCH IRONS SHALL BE RE-ESTABLISHED BY A LICENSED LAND SURVEYOR OR A LICENSED PROFESSIONAL ENGINEER IN ACCORDANCE WITH STATE LAWS. ALL COSTS FOR THIS WORK SHALL BE SUBSIDIARY TO THE OTHER ITEMS OF WORK.
- THE CONTRACTOR SHALL DISPOSE OF ALL EXCESS EXCAVATED SOIL AS DIRECTED BY THE ENGINEER.
- THE CONTRACTOR SHALL AVOID REMOVAL OR TRIMMING OF ANY TREES WHERE POSSIBLE. WHERE THE CONTRACTOR BELIEVES THE REMOVAL OR TRIMMING IS UNAVOIDABLE, HE SHALL COORDINATE SUCH WORK WITH THE ENGINEER.
- TREE REMOVAL AND TREE TRIMMING SHALL BE DONE BY THE CONTRACTOR UNDER THE SUPERVISION OF THE ENGINEER AND SHALL BE CONSIDERED AS SUBSIDIARY TO OTHER ITEMS OF WORK.
- TREES REMOVED, TREE TRIMMINGS, AND OTHER DEBRIS SHALL BE HAULFED FROM THE SITE BY THE CONTRACTOR AND WASTED AS DIRECTED BY THE ENGINEER AT NO ADDITIONAL COST TO THE OWNER.
- CONTRACTOR SHALL PROVIDE POSITIVE DRAINAGE AWAY FROM ALL MANHOLE COVERS.
- THE CONTRACTOR MUST NOTIFY ST. JOSEPH HOSPITAL IN WRITING TWO WEEKS IN ADVANCE OF ANY STREET CLOSURES; THIS NOTIFICATION MUST INCLUDE DESCRIPTIONS OF ALTERNATE ROUTES AROUND THE CONSTRUCTION AREA. ONLY ONE STREET MAY BE CLOSED AT ANY TIME.
- THE CONTRACTOR SHALL PROVIDE TEMPORARY SNOW FENCING ALONG THE ST. JOSEPH HOSPITAL REHABILITATION EXERCISE AREA TO SEPARATE CONSTRUCTION ACTIVITY FROM THE EXERCISE AREA. COST INCIDENTAL TO PROJECT.
- THE CONTRACTOR SHALL MAKE EVERY ATTEMPT TO KEEP CONSTRUCTION NOISE TO A MINIMUM, AND AT NO TIME SHALL WORK BEGIN BEFORE 8:00 A.M. OR END AFTER 6:00 P.M.
- CONTRACTOR SHALL VERIFY BASEMENT FLOOR ELEVATION OF DOCTOR'S BUILDING AND SEDGWICK COUNTY MEDICAL SOCIETY. THESE ELEVATIONS MUST NOT BE EXCEEDED BY THE WASTEWATER SURFACE ELEVATION DURING WASTEWATER DIVERSION PERIODS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGES RESULTING FROM WASTEWATER SURCHARGES, BACKUPS OR DISCHARGES CAUSED BY CONSTRUCTION ACTIVITY OR TEMPORARY DIVERSIONS (I.E. PUMPING, ETC.) OF THE WASTEWATER FLOW.

CONSTRUCTION SEQUENCE

- NOTIFY CITY AND ST. JOSEPH HOSPITAL TWO WEEKS IN ADVANCE OF CLOSURE OF ZIMMERLY.
- BEGIN CONSTRUCTION ON MH'S NO. 1 AND NO. 7, WASTEWATER DIVERSION FROM MH C TO MH A MAY BE REQUIRED; ELEVATIONS OF THE CRITICAL BUILDINGS MUST BE CHECKED. (GENERAL NOTE 16)
- CONSTRUCT LINE ACROSS ZIMMERLY ST. AND MH NO. 2, TEST & INSPECT & ACCEPT LINE BETWEEN MH NO. 1 AND MH NO. 2.
- REPLACE PAVEMENT IN ZIMMERLY AND OPEN STREET TO TRAFFIC.
- CONSTRUCT LINE AND MANHOLES FROM MH NO. 2 TO AND INCLUDING MH NO. 5.
- NOTIFY CITY AND ST. JOSEPH HOSPITAL TWO WEEKS IN ADVANCE OF CLOSURE OF GRAND ST.
- CONSTRUCT LINE ACROSS GRAND ST. TEST, INSPECT & ACCEPT LINE BETWEEN MH NO. 6 AND MH NO. 2.
- CONSTRUCT MH NO. 6 TIE IN EXISTING SEWER REPLACE PAVEMENT IN GRAND AND OPEN STREET TO TRAFFIC.
- CONSTRUCT LINE FROM MH NO. 6 TO MH NO. M TEST, INSPECT AND ACCEPT LINE.
- COMPLETE TIE-INS MH NO. M & MH NO. 1. WASTEWATER DIVERSION MAY BE REQUIRED.
- ABANDON SEWERS, RESTORE CONSTRUCTION AREA IN ACCORDANCE WITH SPECIFICATIONS

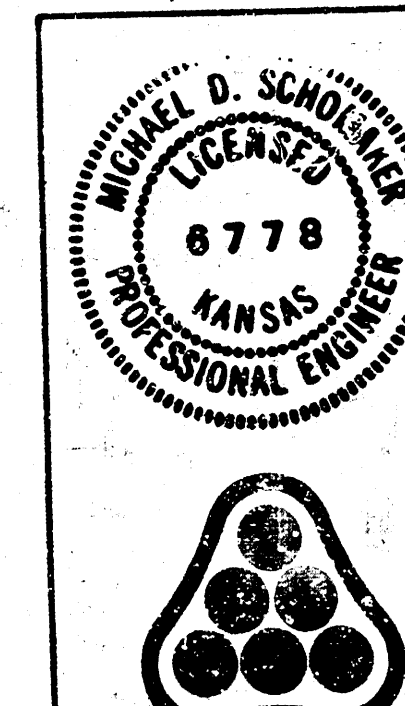

No.	Revised	By	Date
ALTER, REPAIR, RECONSTRUCT OR CONSTRUCT A SEWER TO SUPPLEMENT ST. JOSEPH HOSPITAL SANITARY SEWER KEY MAP MICHAEL E. LINDBAK, P.E., -CITY ENGINEER CITY OF WICHITA PROJECT NO. 469-76-245-B1340-000-000-001 PROFESSIONAL ENGINEERING CONSULTANTS, P.A. ENGINEERS WICHITA, KANSAS Designed by KLR, MDS Job No. 34-04207 Drawn by DM, SM, RFJ Date Oct. 1984			
			Sheet 2 of 4

FILMED FROM THE BEST AVAILABLE COPY

