


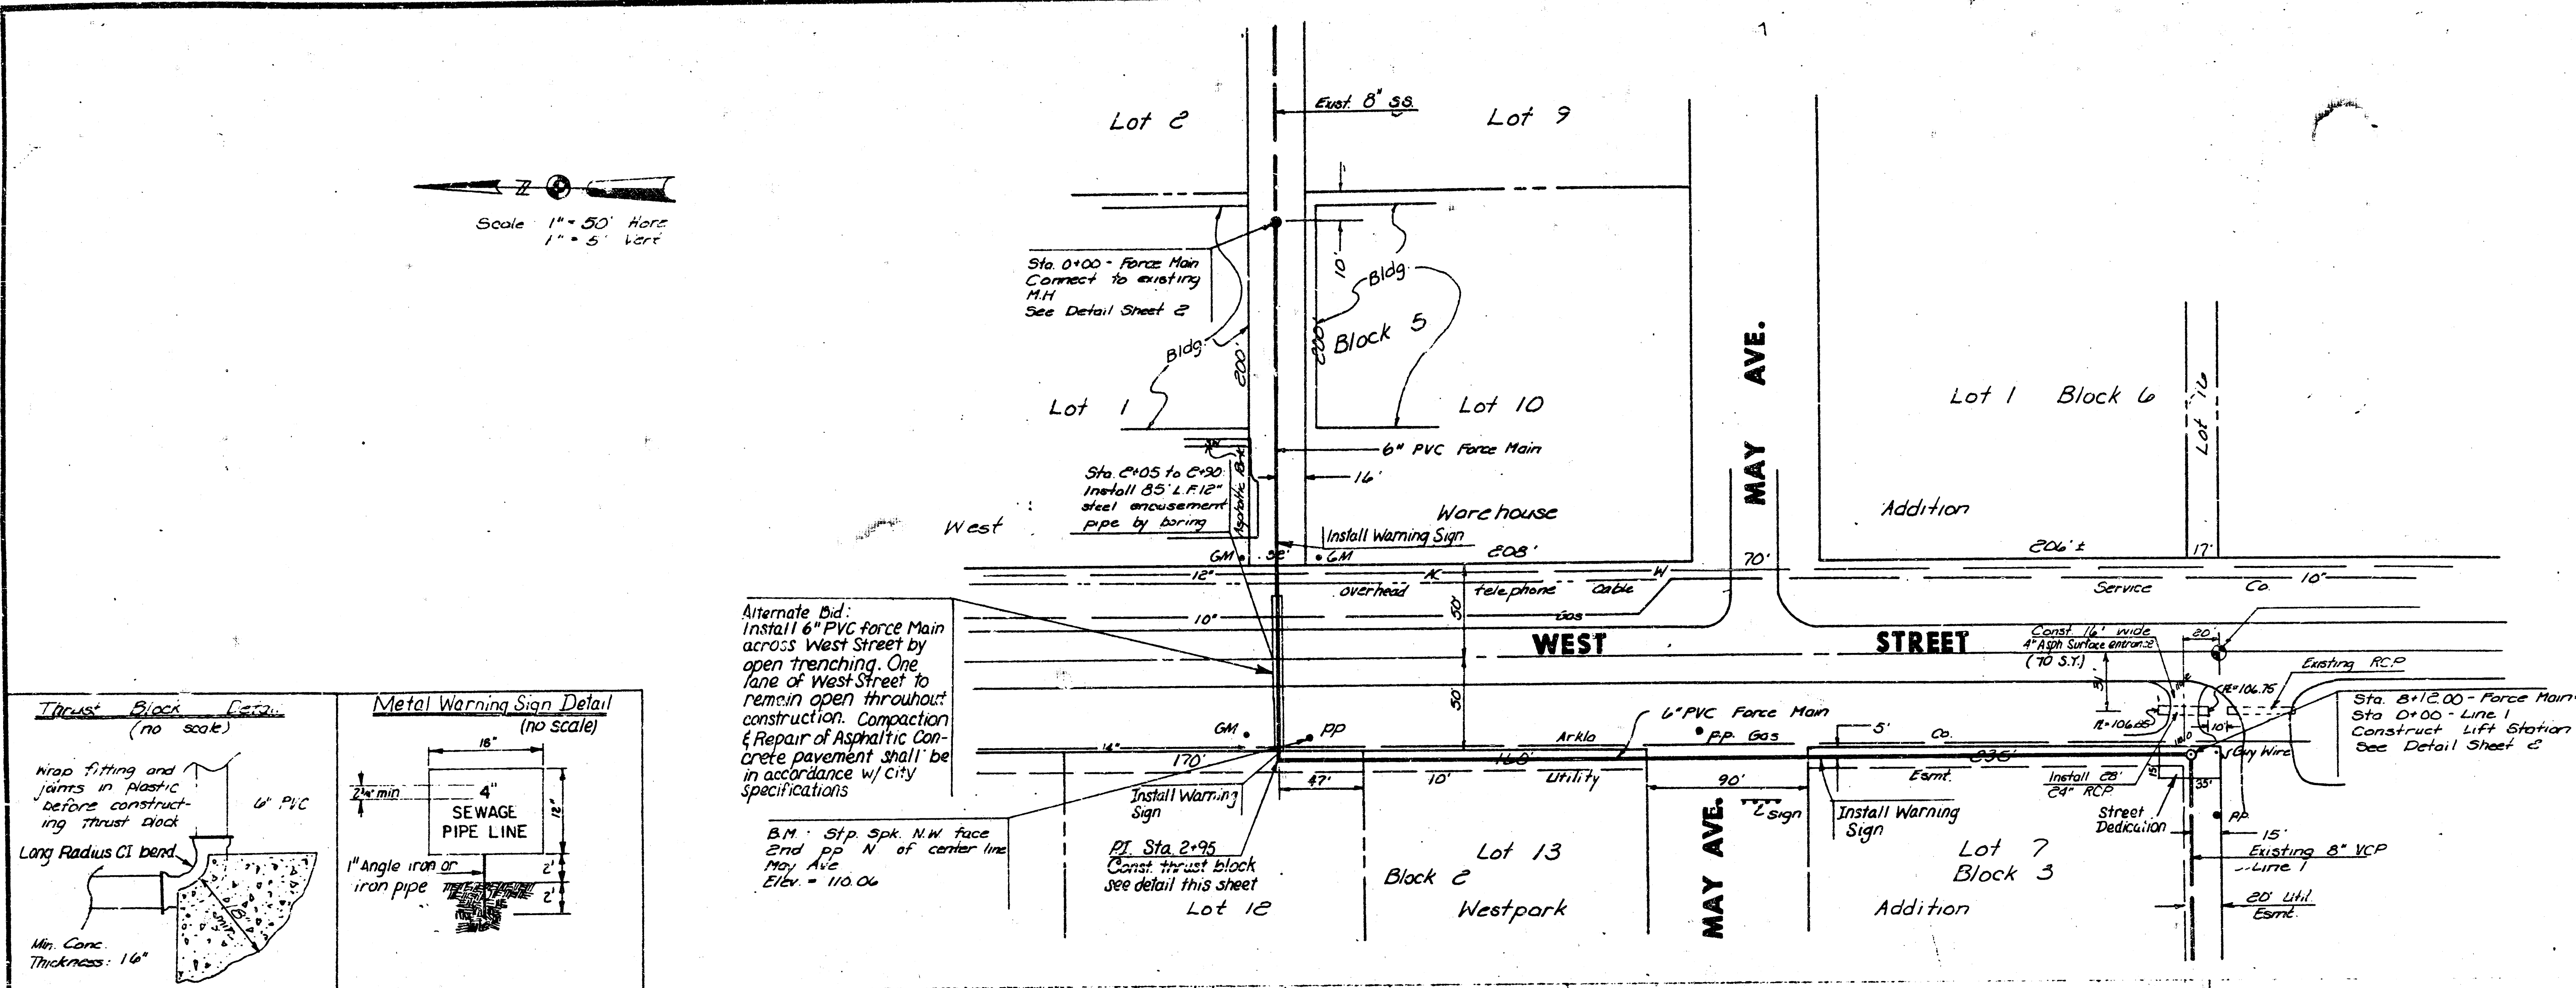



① 250 psi. steel 14" gas line: Contractor small contact Arkko Gas Co. @ 942-8358 for location of line prior to force main construction

② 45 p.s.i. 10" gas line:
Contractor shall contact
Gas Service Co. @
263-7511 for location
of line prior to force
main construction.

NOTE TO	PAGE
NOT WITH D	2000
DESCRIPTION OF THE	
USE OF THE	



7-23-79

۱۰۰



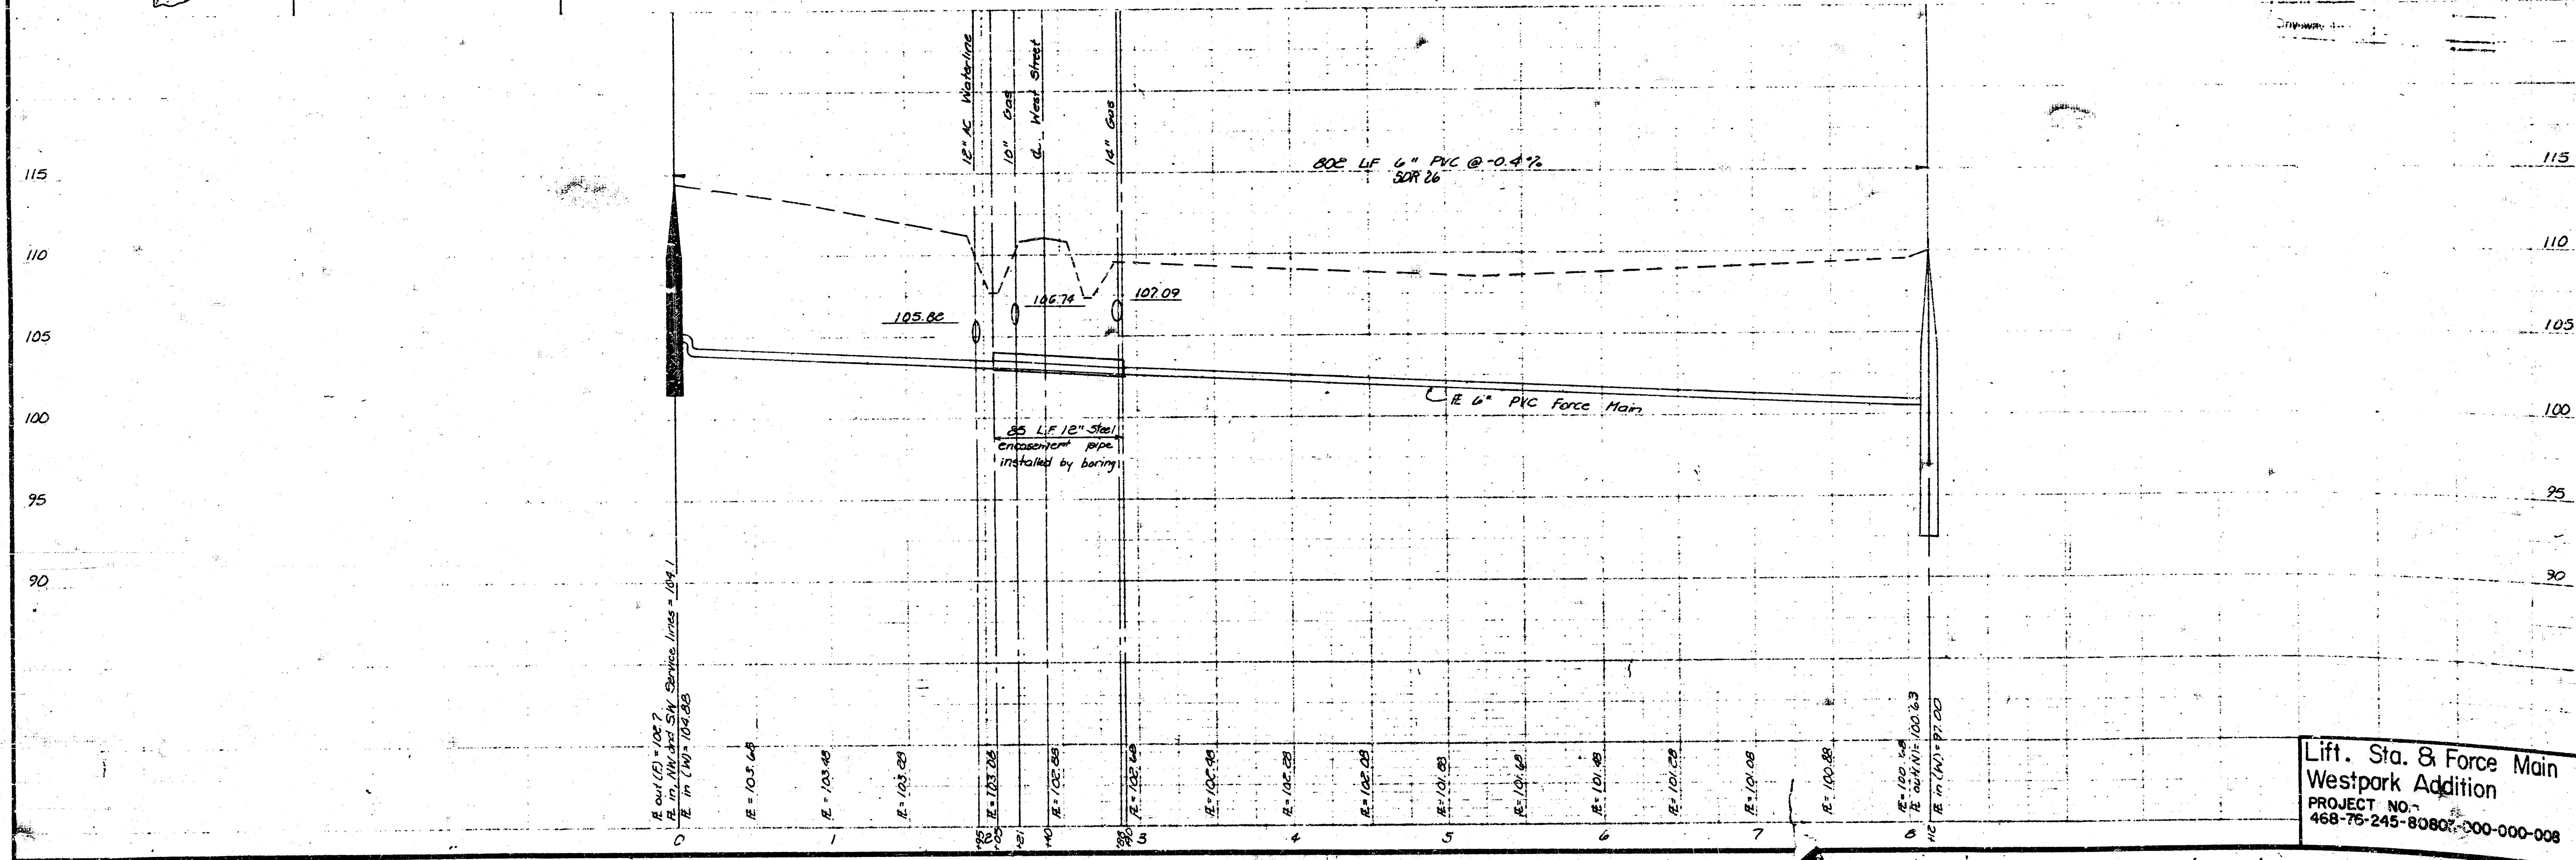
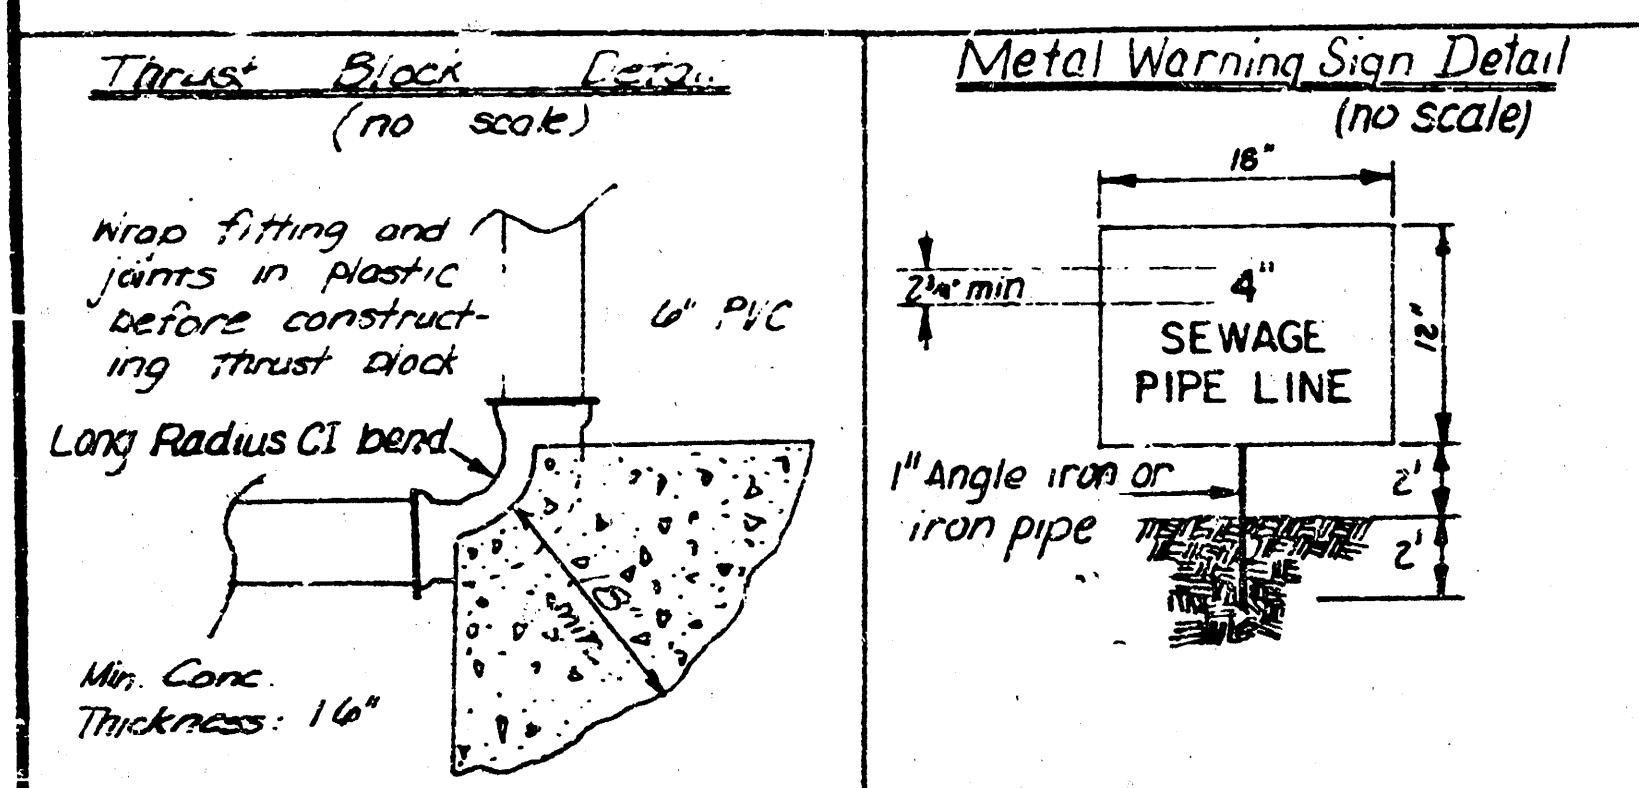


Lift. Sta. & Force Main
Westpark Addition
PROJECT NO. 468-76-245-80801-000-000-000

NOTE: Contractor shall furnish and install meter pole, disconnect switch, conduit, transfer switch and wire such to facilitate connection to power supply. Contractor shall install meter base which will be furnished by the power company. Two underground conduits shall be installed between lift station and meter pole. One conduit shall be 1 1/4" D. for power supply. The other conduit shall be 3/4" D. for alarm circuit. All electrical installations and wiring shall conform to the City of Wichita Code. Location of meter pole shall be approved by the power company and the engineer.

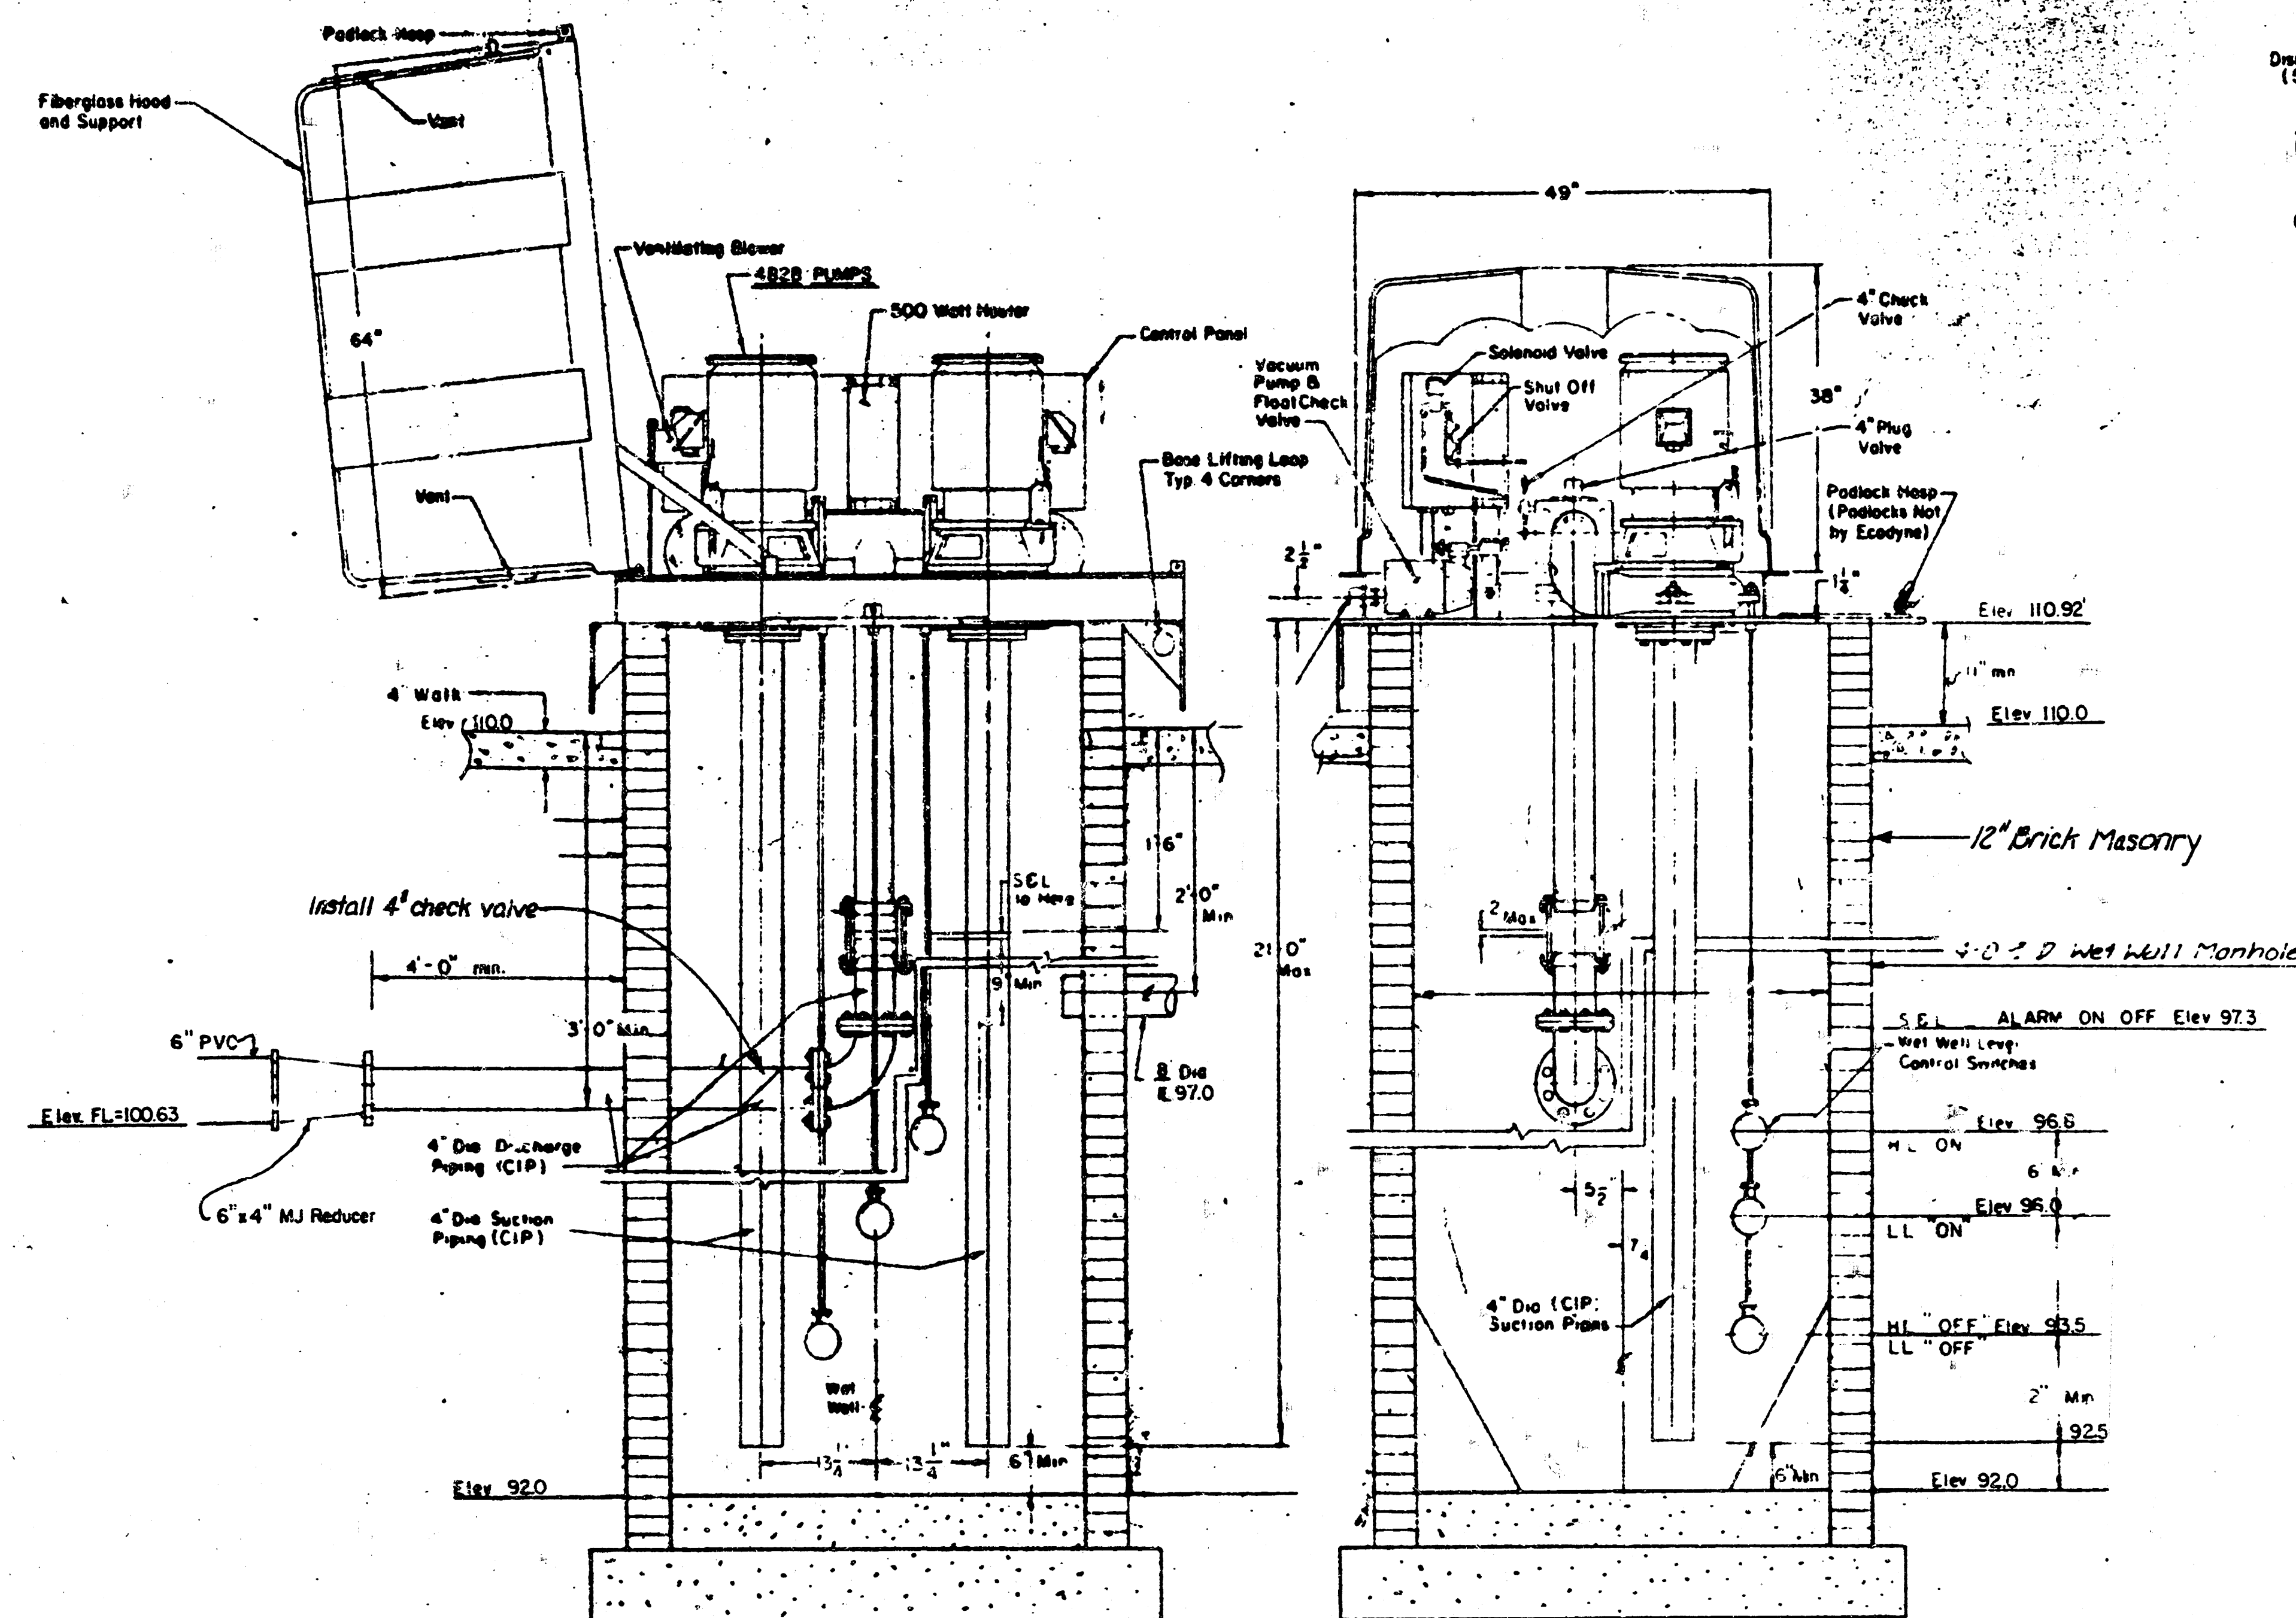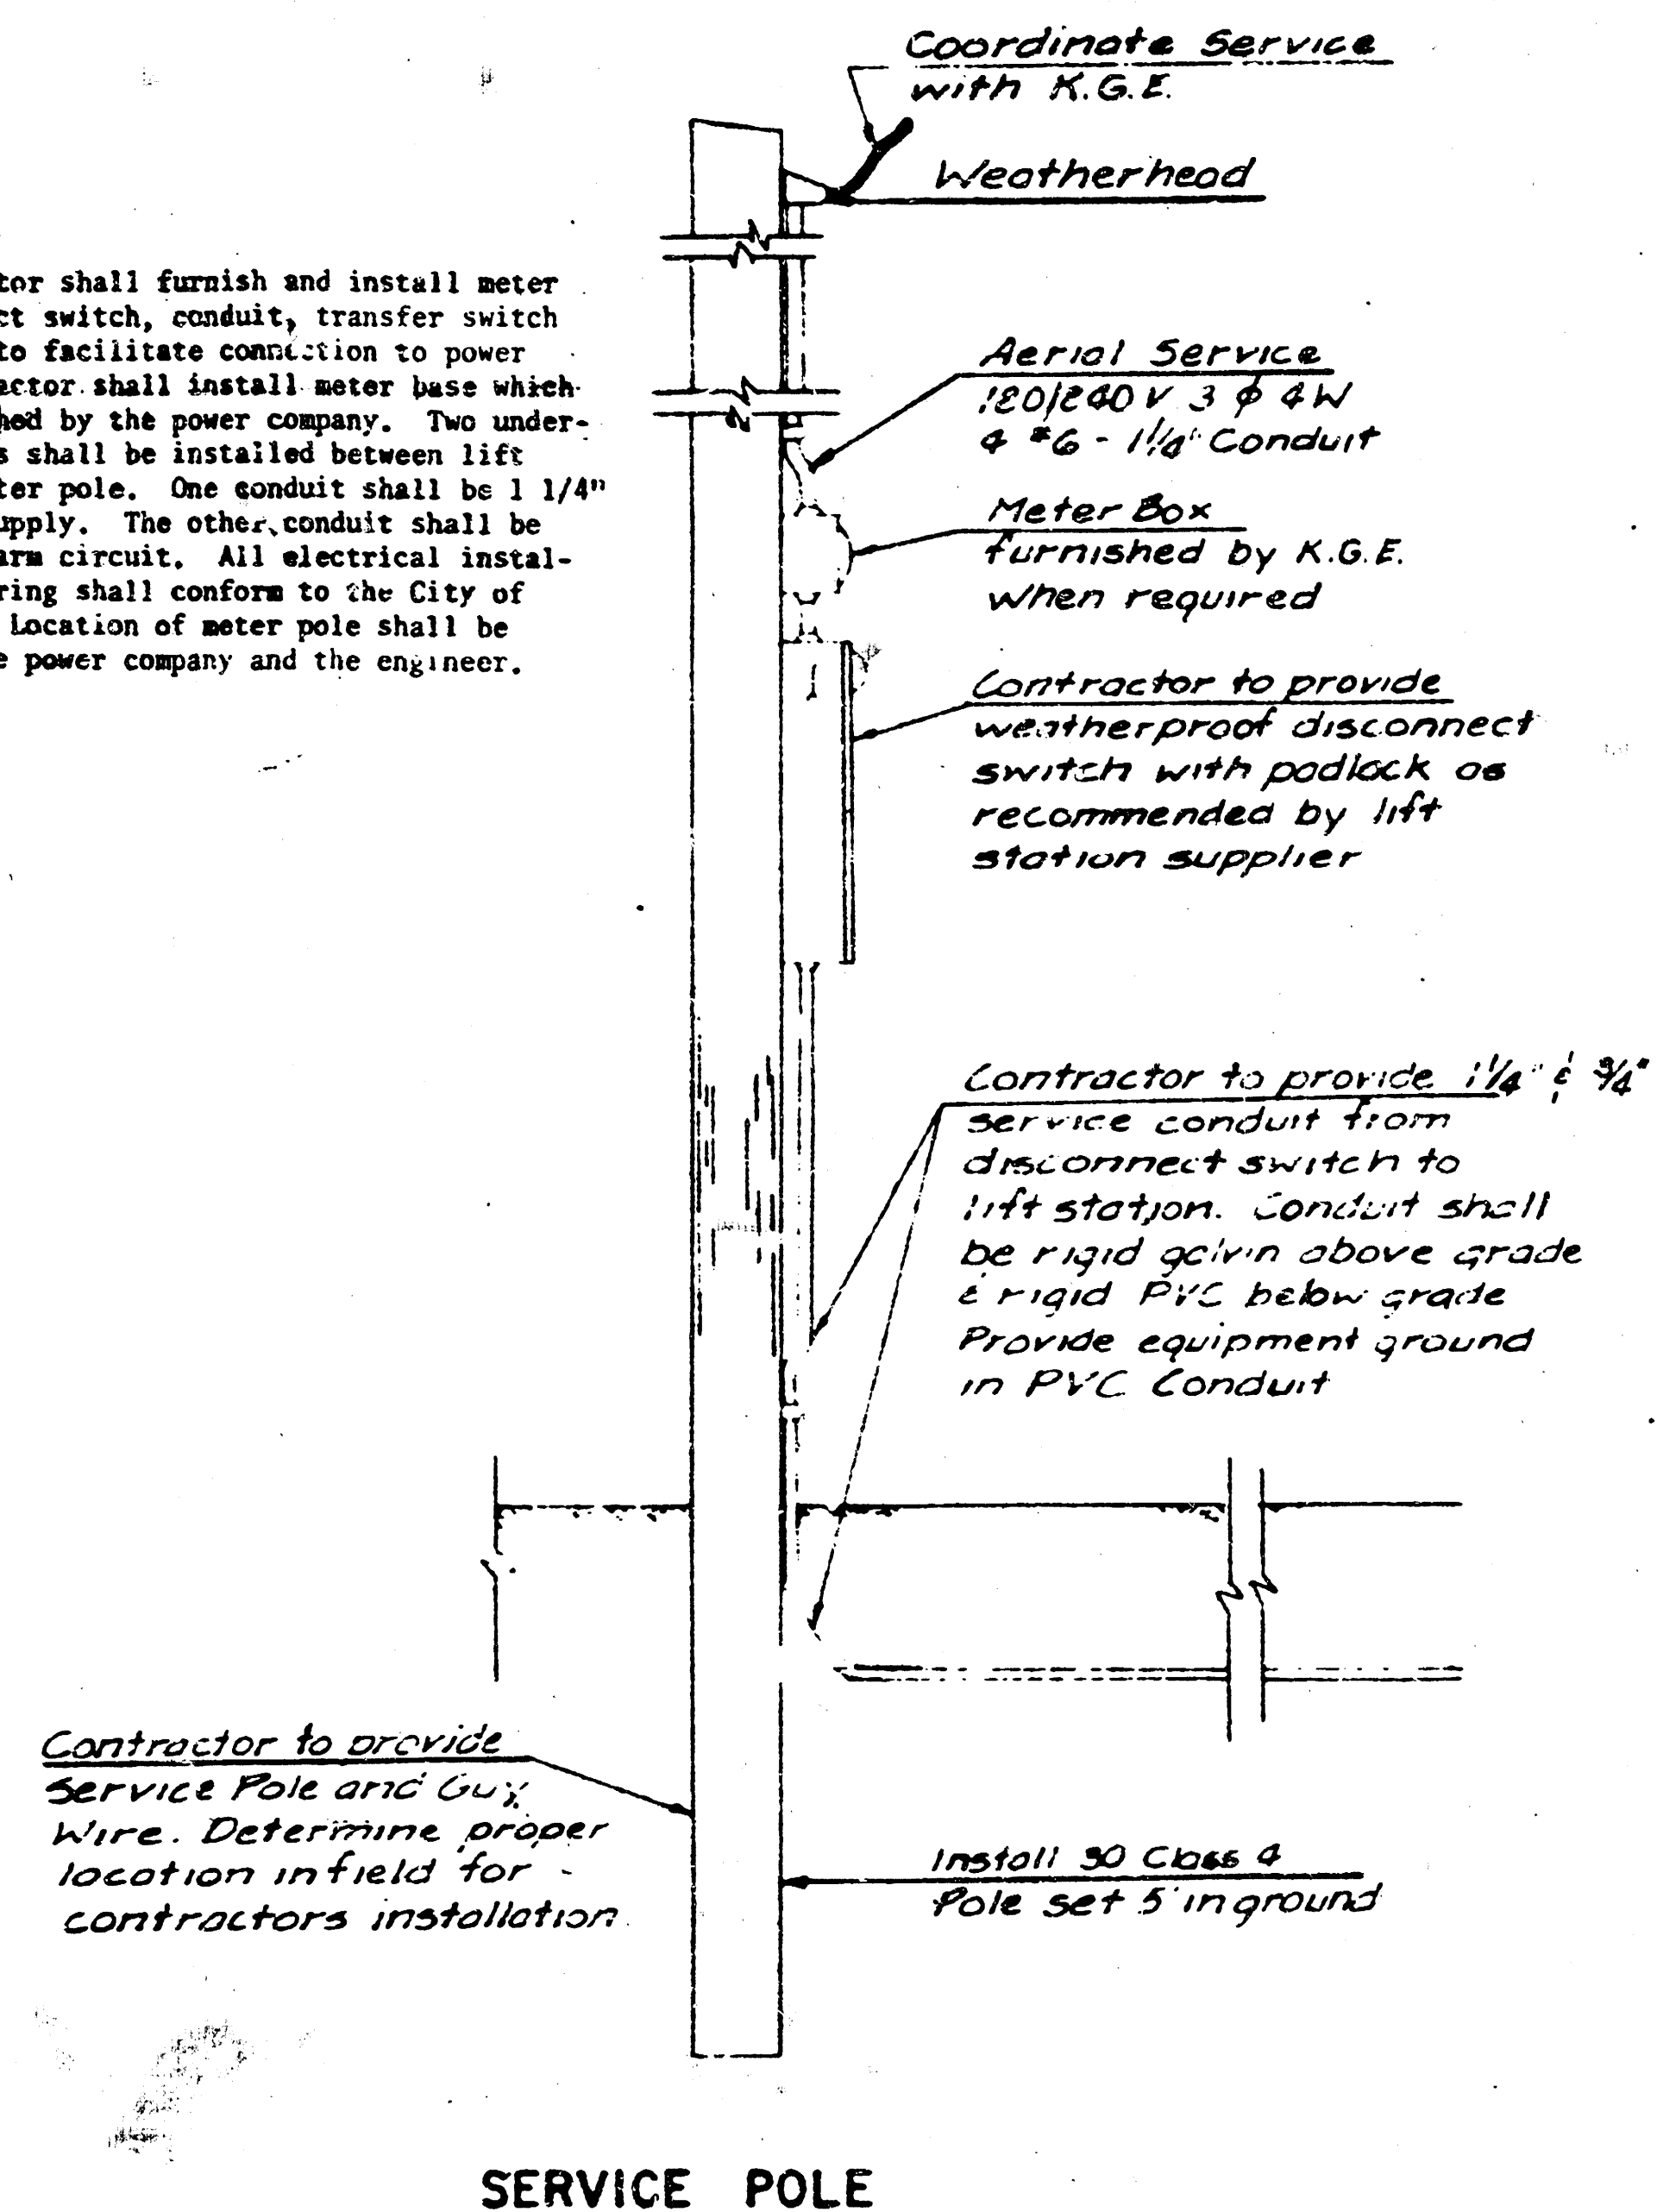

NOTE: Lift station to be installed w/manway opening facing west street.

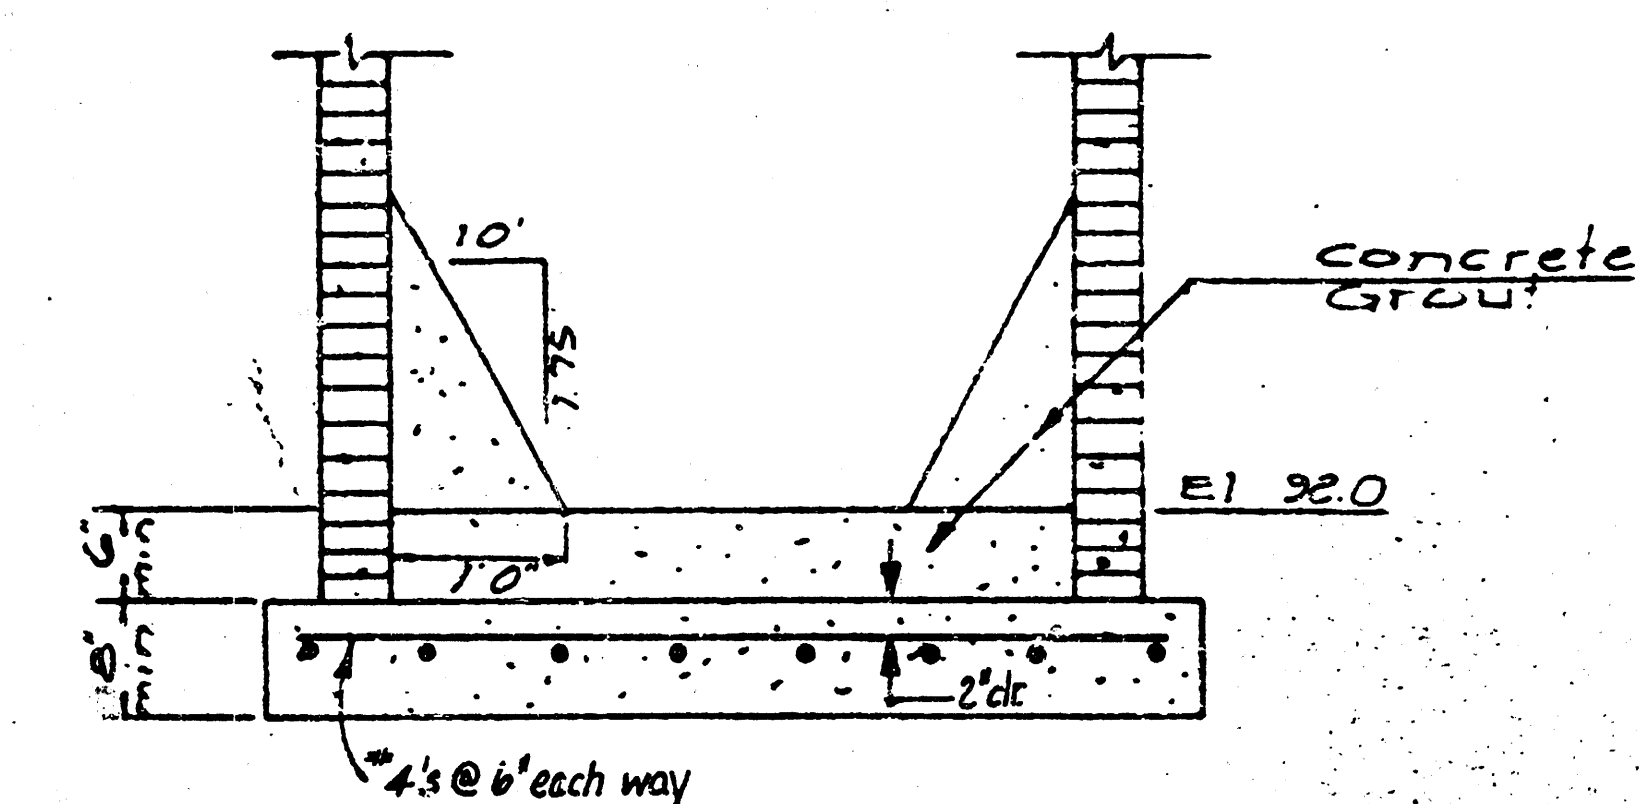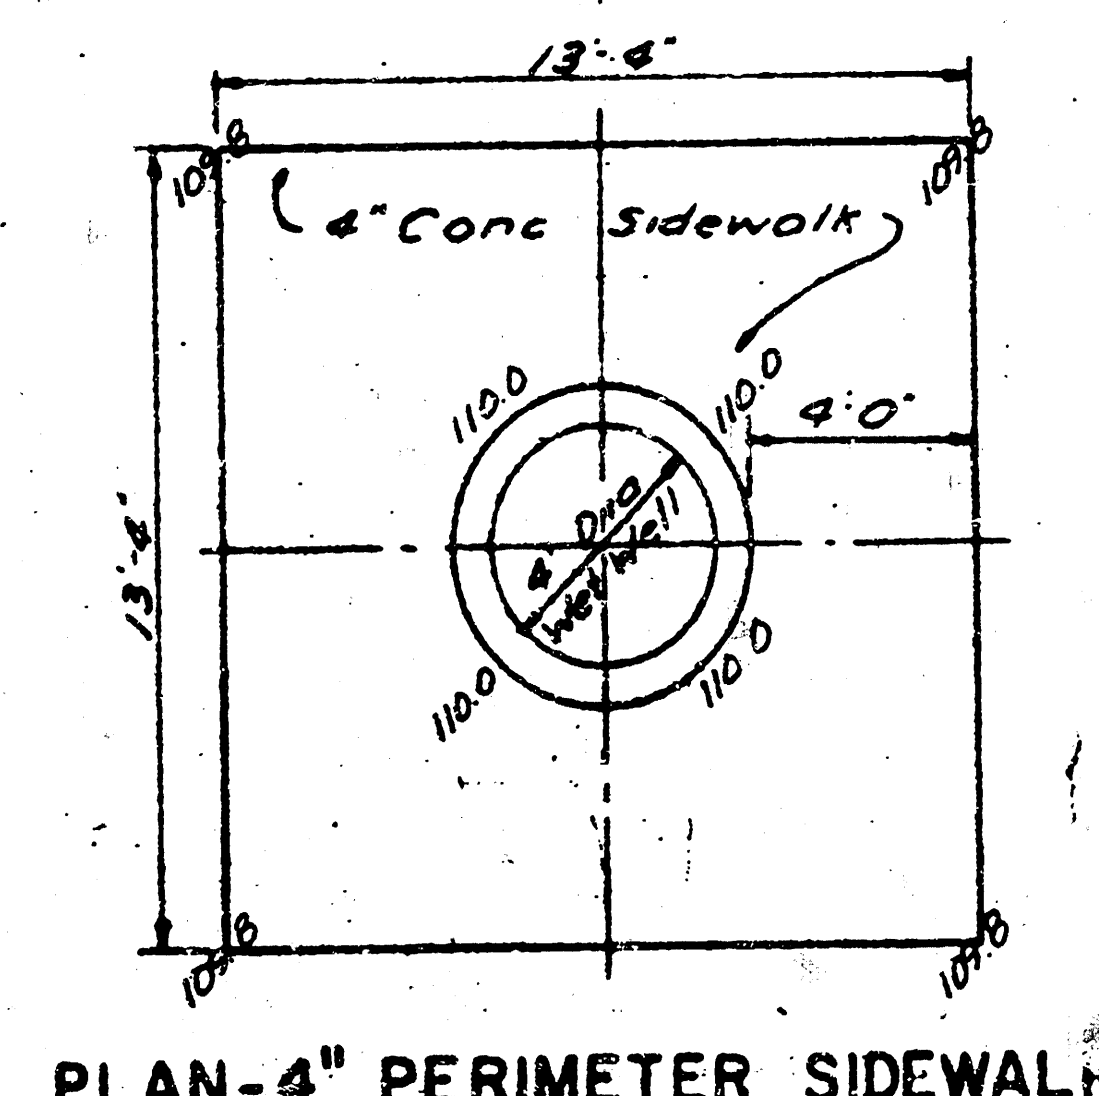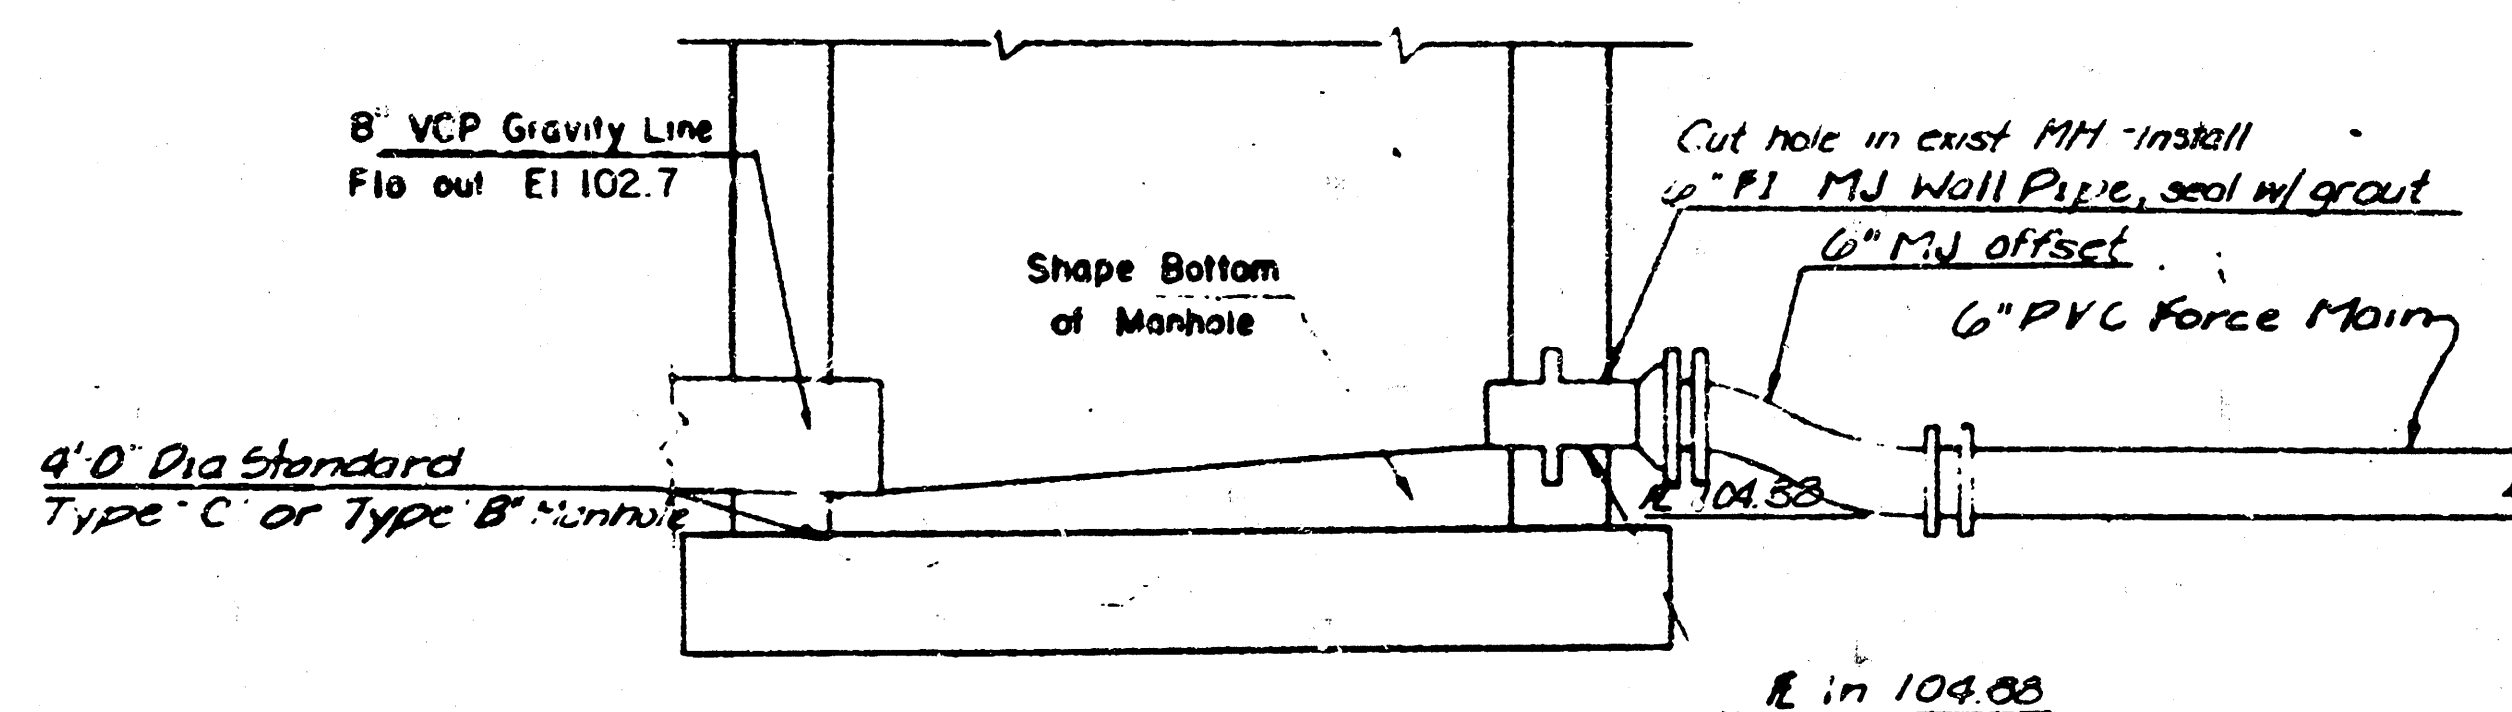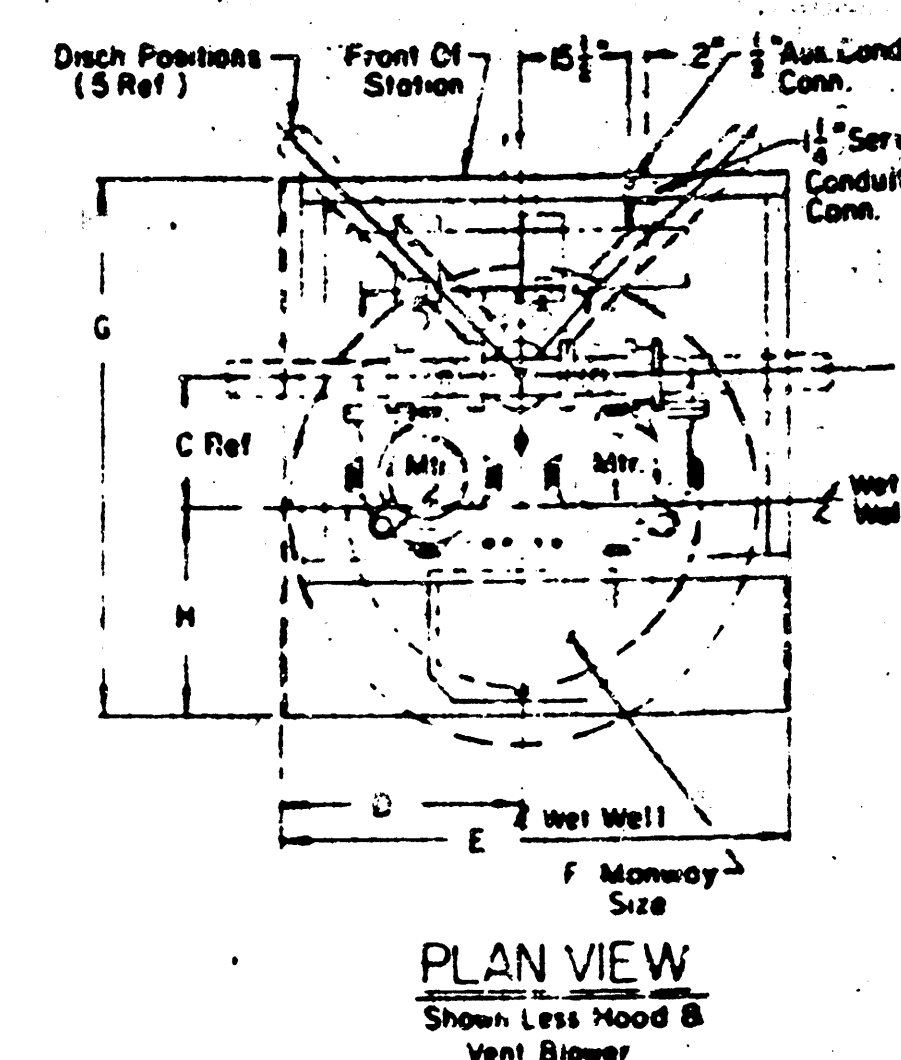

Smith & Loveless Pump
4B2B Pump
Impeller S4122-9" Dia.
875 RPM 2 HP
230 GPM 17.3 TDH

General Notes

1. Use brick manhole Type "B" for Wet well.
2. Contractor to furnish padlock for Lift Station.
3. Lift Station to be furnished with power failure and high water alarm, to be connected to City of Wichita Alarm System or Maintenance Substation.
4. Pump motors to be equipped with running time meters.
5. Lift station to provide manual transfer switch to facilitate connection of auxiliary standby power.

PROJECT NO.

WESTPARK ADDITION

LIFT STATION DETAILS

Van Doren - Hazard - Stallings

Architects • Engineers • Planners
Topeka Wichita Shawnee

Design SEA	Drawn by KRA
Checked by KHB	Date JULY '79
Job no. 78-232	Sheet 2/2