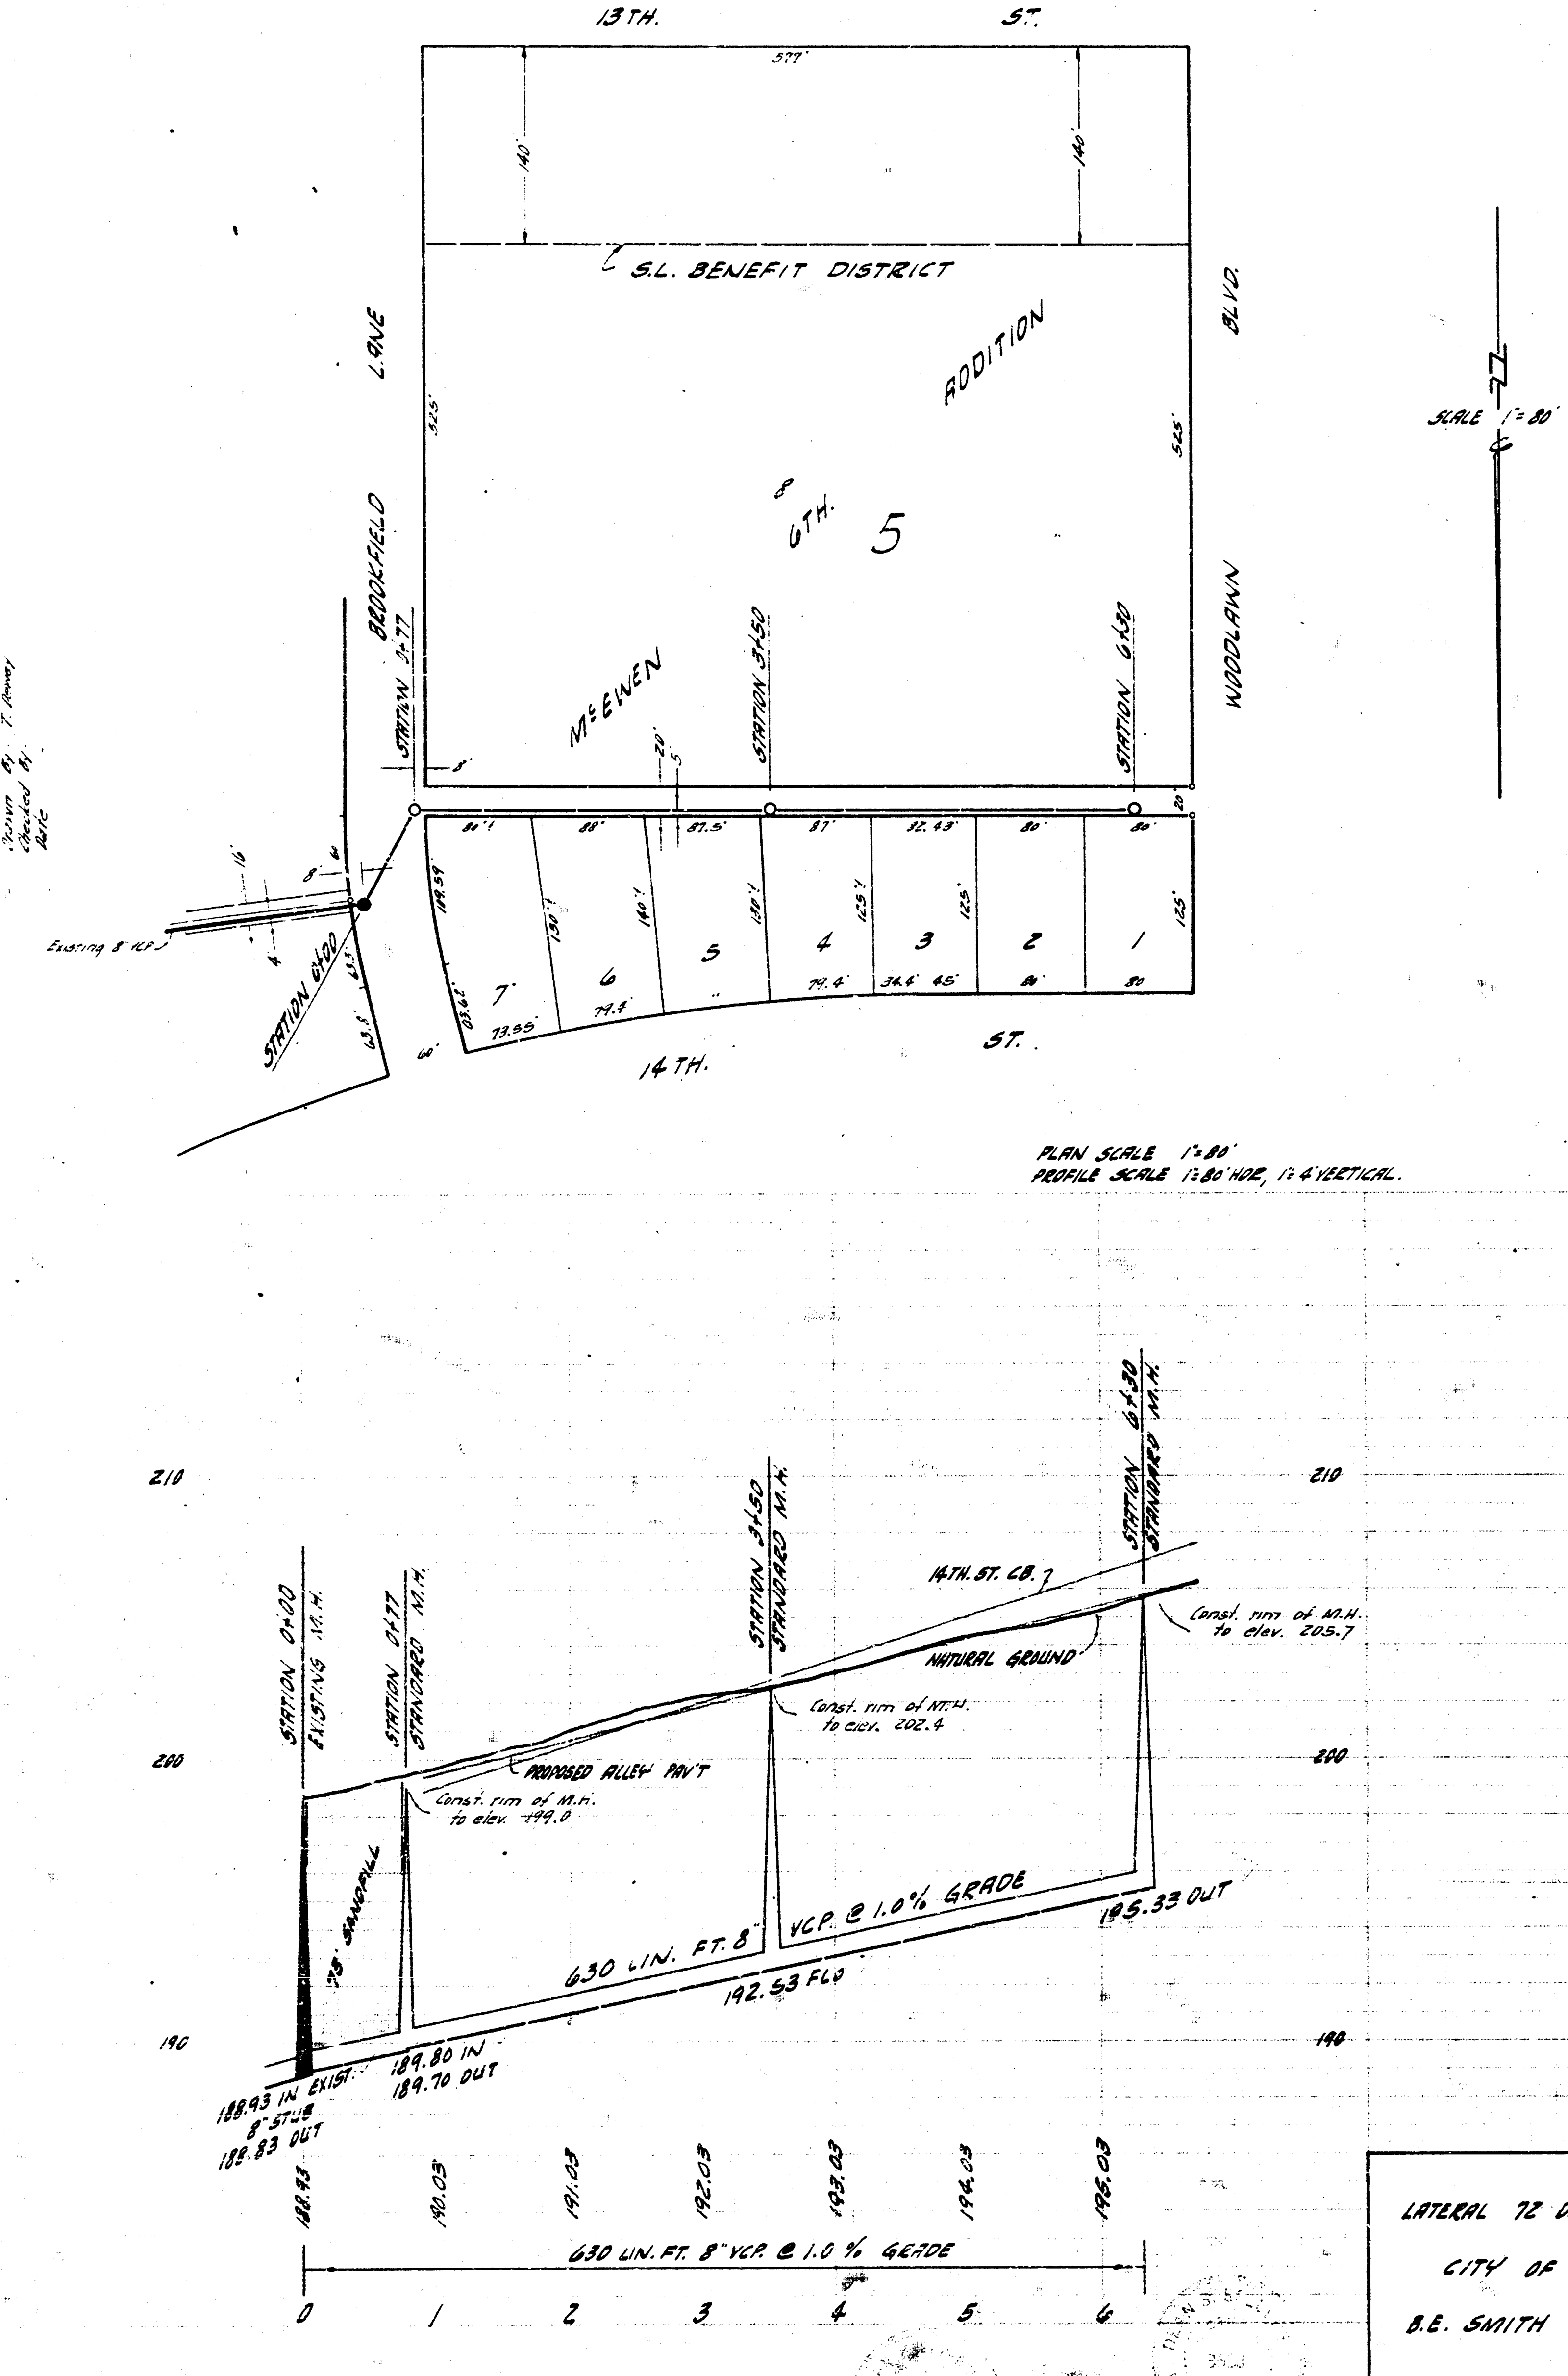
13TH. ST.
577'
140'
140'
S.L. BENEFIT DISTRICT
McEWEN 6TH. ADDITION 5
BROOKFIELD LANE
WOODLAWN BLVD.
525'
525'
STATION 0+77
STATION 3+50
STATION 6+30
STATION 0+00
Existing 8" VCP
SCALE 1"=80'
80' 88' 87.5' 87' 32.43' 80' 80'
7 6 5 4 3 2 1
14TH. ST.
Survey By: C.H. Allis Book 114
Drawn By: T. Rowey
Checked By:
Date
PLAN SCALE 1"=80'
PROFILE SCALE 1"=80' HOR, 1"=4' VERTICAL.
210
200
190
STATION 0+00 EXISTING M.H.
STATION 0+77 STANDARD M.H.
STATION 3+50 STANDARD M.H.
STATION 6+30 STANDARD M.H.
14TH. ST. C.B.
NATURAL GROUND
PROPOSED ALLEY PAV'T
Const. rim of M.H. to elev. 199.0
Const. rim of M.H. to elev. 202.4
Const. rim of M.H. to elev. 205.7
SANDFILL
630 LIN. FT. 8" VCP @ 1.0% GRADE
192.53 FLO
195.33 OUT
188.93 IN EXIST. 8" STUB
188.83 OUT
189.80 IN
189.70 OUT
188.93 190.03 191.03 192.03 193.03 194.03 195.03
630 LIN. FT. 8" VCP @ 1.0 % GRADE
0 1 2 3 4 5 6

LATERAL 72 DCS # 2 SAN. SEWER 12

CITY OF WICHITA, KANSAS

B.E. SMITH CITY ENGINEER

PROJ. NO. C29-34 DATE: Feb. 1961

B.M. 211.86 STANDARD NE 17 TH & WOODLAWN.
B.M. 208.43 DOUBLE NAIL ES TELE POLE ES WOODLAWN, S.S. ABERDEEN.
B.M. 187.55 TOP NW POST BDG. ON 13TH. E. OF ARMOUR.
B.M. 193.96 NW COR CONC. PD. N. END HO# 1360 SE STRATFORD & 13TH.

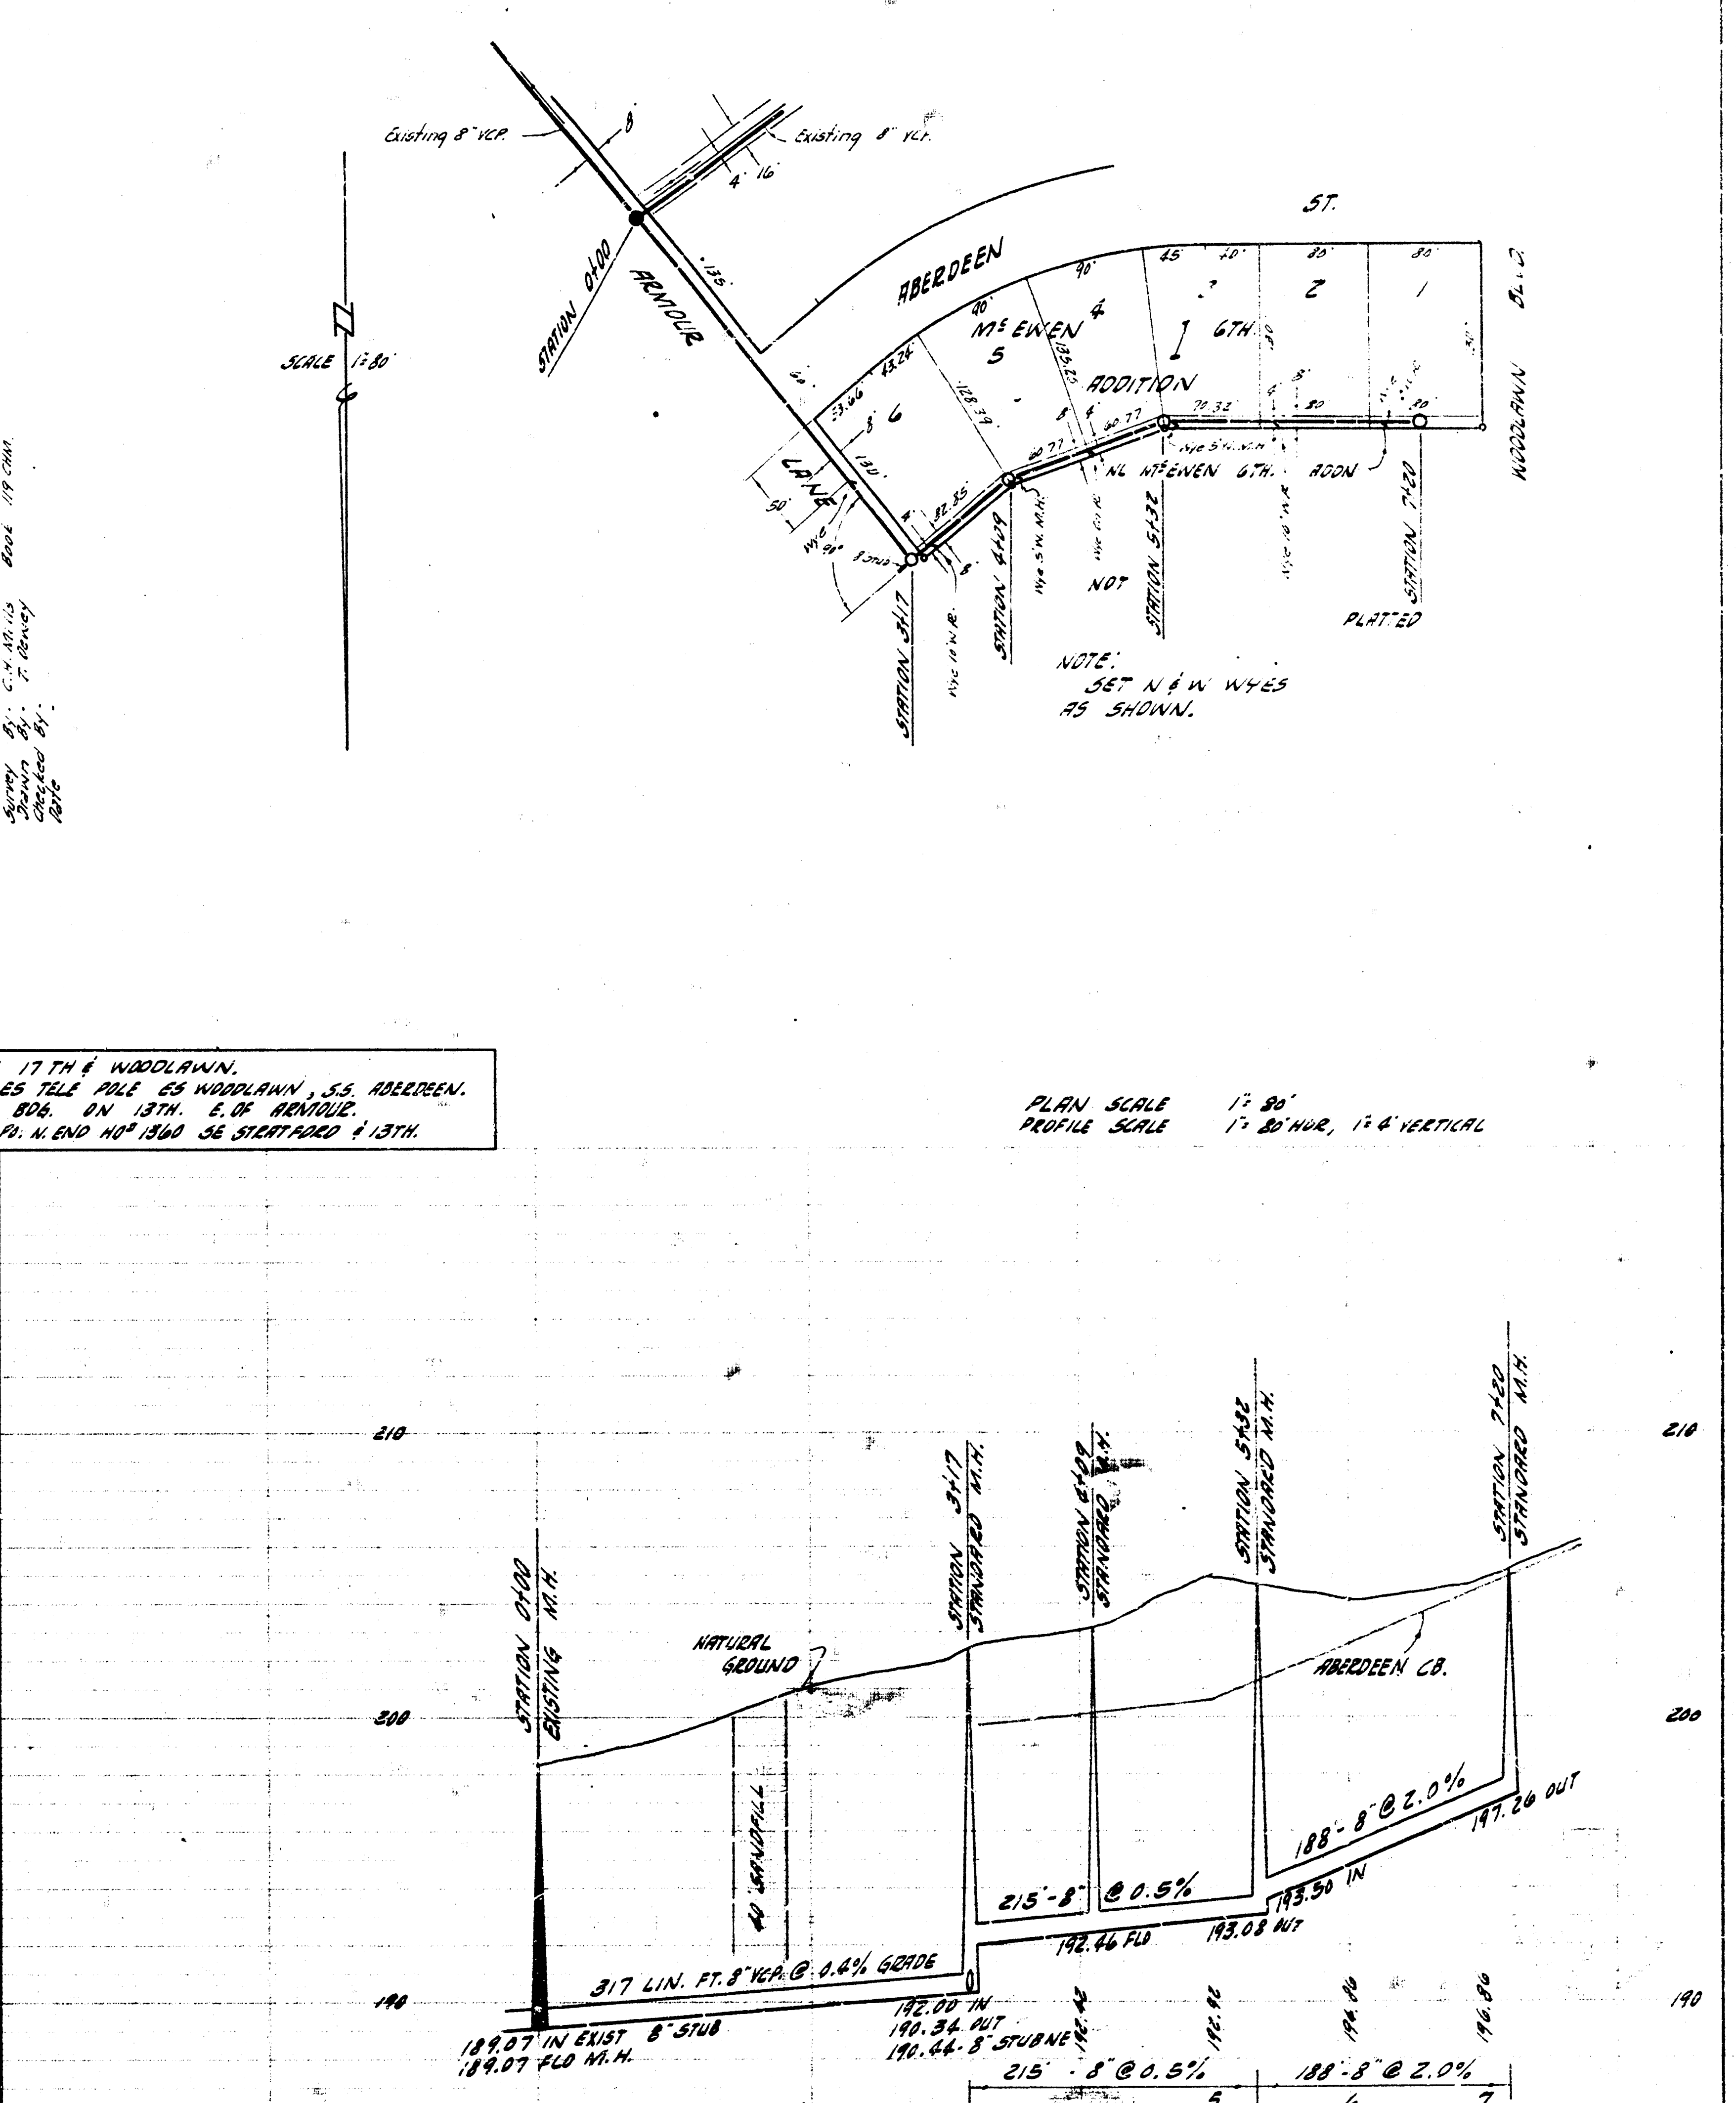
Existing 8" VCP
Existing 8" VCP
STATION 0+00
ARMOUR
ABERDEEN ST.
McEWEN 6TH. ADDITION
6 5 4 3 2 1
LANE
WOODLAWN BLVD.
SCALE 1"=80'
NL McEWEN 6TH. ADDN
NOT PLATTED
STATION 3+17
STATION 4+49
STATION 5+32
STATION 7+20
NOTE:
SET N & W WYES AS SHOWN.
PLAN SCALE 1"=80'
PROFILE SCALE 1"=80' HOR, 1"=4' VERTICAL
210
200
190
STATION 0+00 EXISTING M.H.
STATION 3+17 STANDARD M.H.
STATION 4+09 STANDARD M.H.
STATION 5+32 STANDARD M.H.
STATION 7+20 STANDARD M.H.
NATURAL GROUND
ABERDEEN CB.
40' SANDFILL
317 LIN. FT. 8" VCP @ 0.4% GRADE
215'-8" @ 0.5%
188'-8" @ 2.0%
197.26 OUT
193.50 IN
193.08 OUT
192.46 FLO
192.00 IN
190.34 OUT
190.44-8" STUB NE
189.07 IN EXIST 8" STUB
189.07 FLO M.H.
189.07 189.47 189.87 190.27 192.42 192.92 194.86 196.86
317 LIN. FT. 8" VCP @ 0.4% GRADE
215'-8" @ 0.5%
188'-8" @ 2.0%
0 1 2 3 4 5 6 7

LATERAL 76 DCS # 2 SAN. SEWER 12

CITY OF WICHITA, KANSAS

B.E. SMITH CITY ENGINEER

PROJ. NO. C29-38. DATE. Oct. 1959