

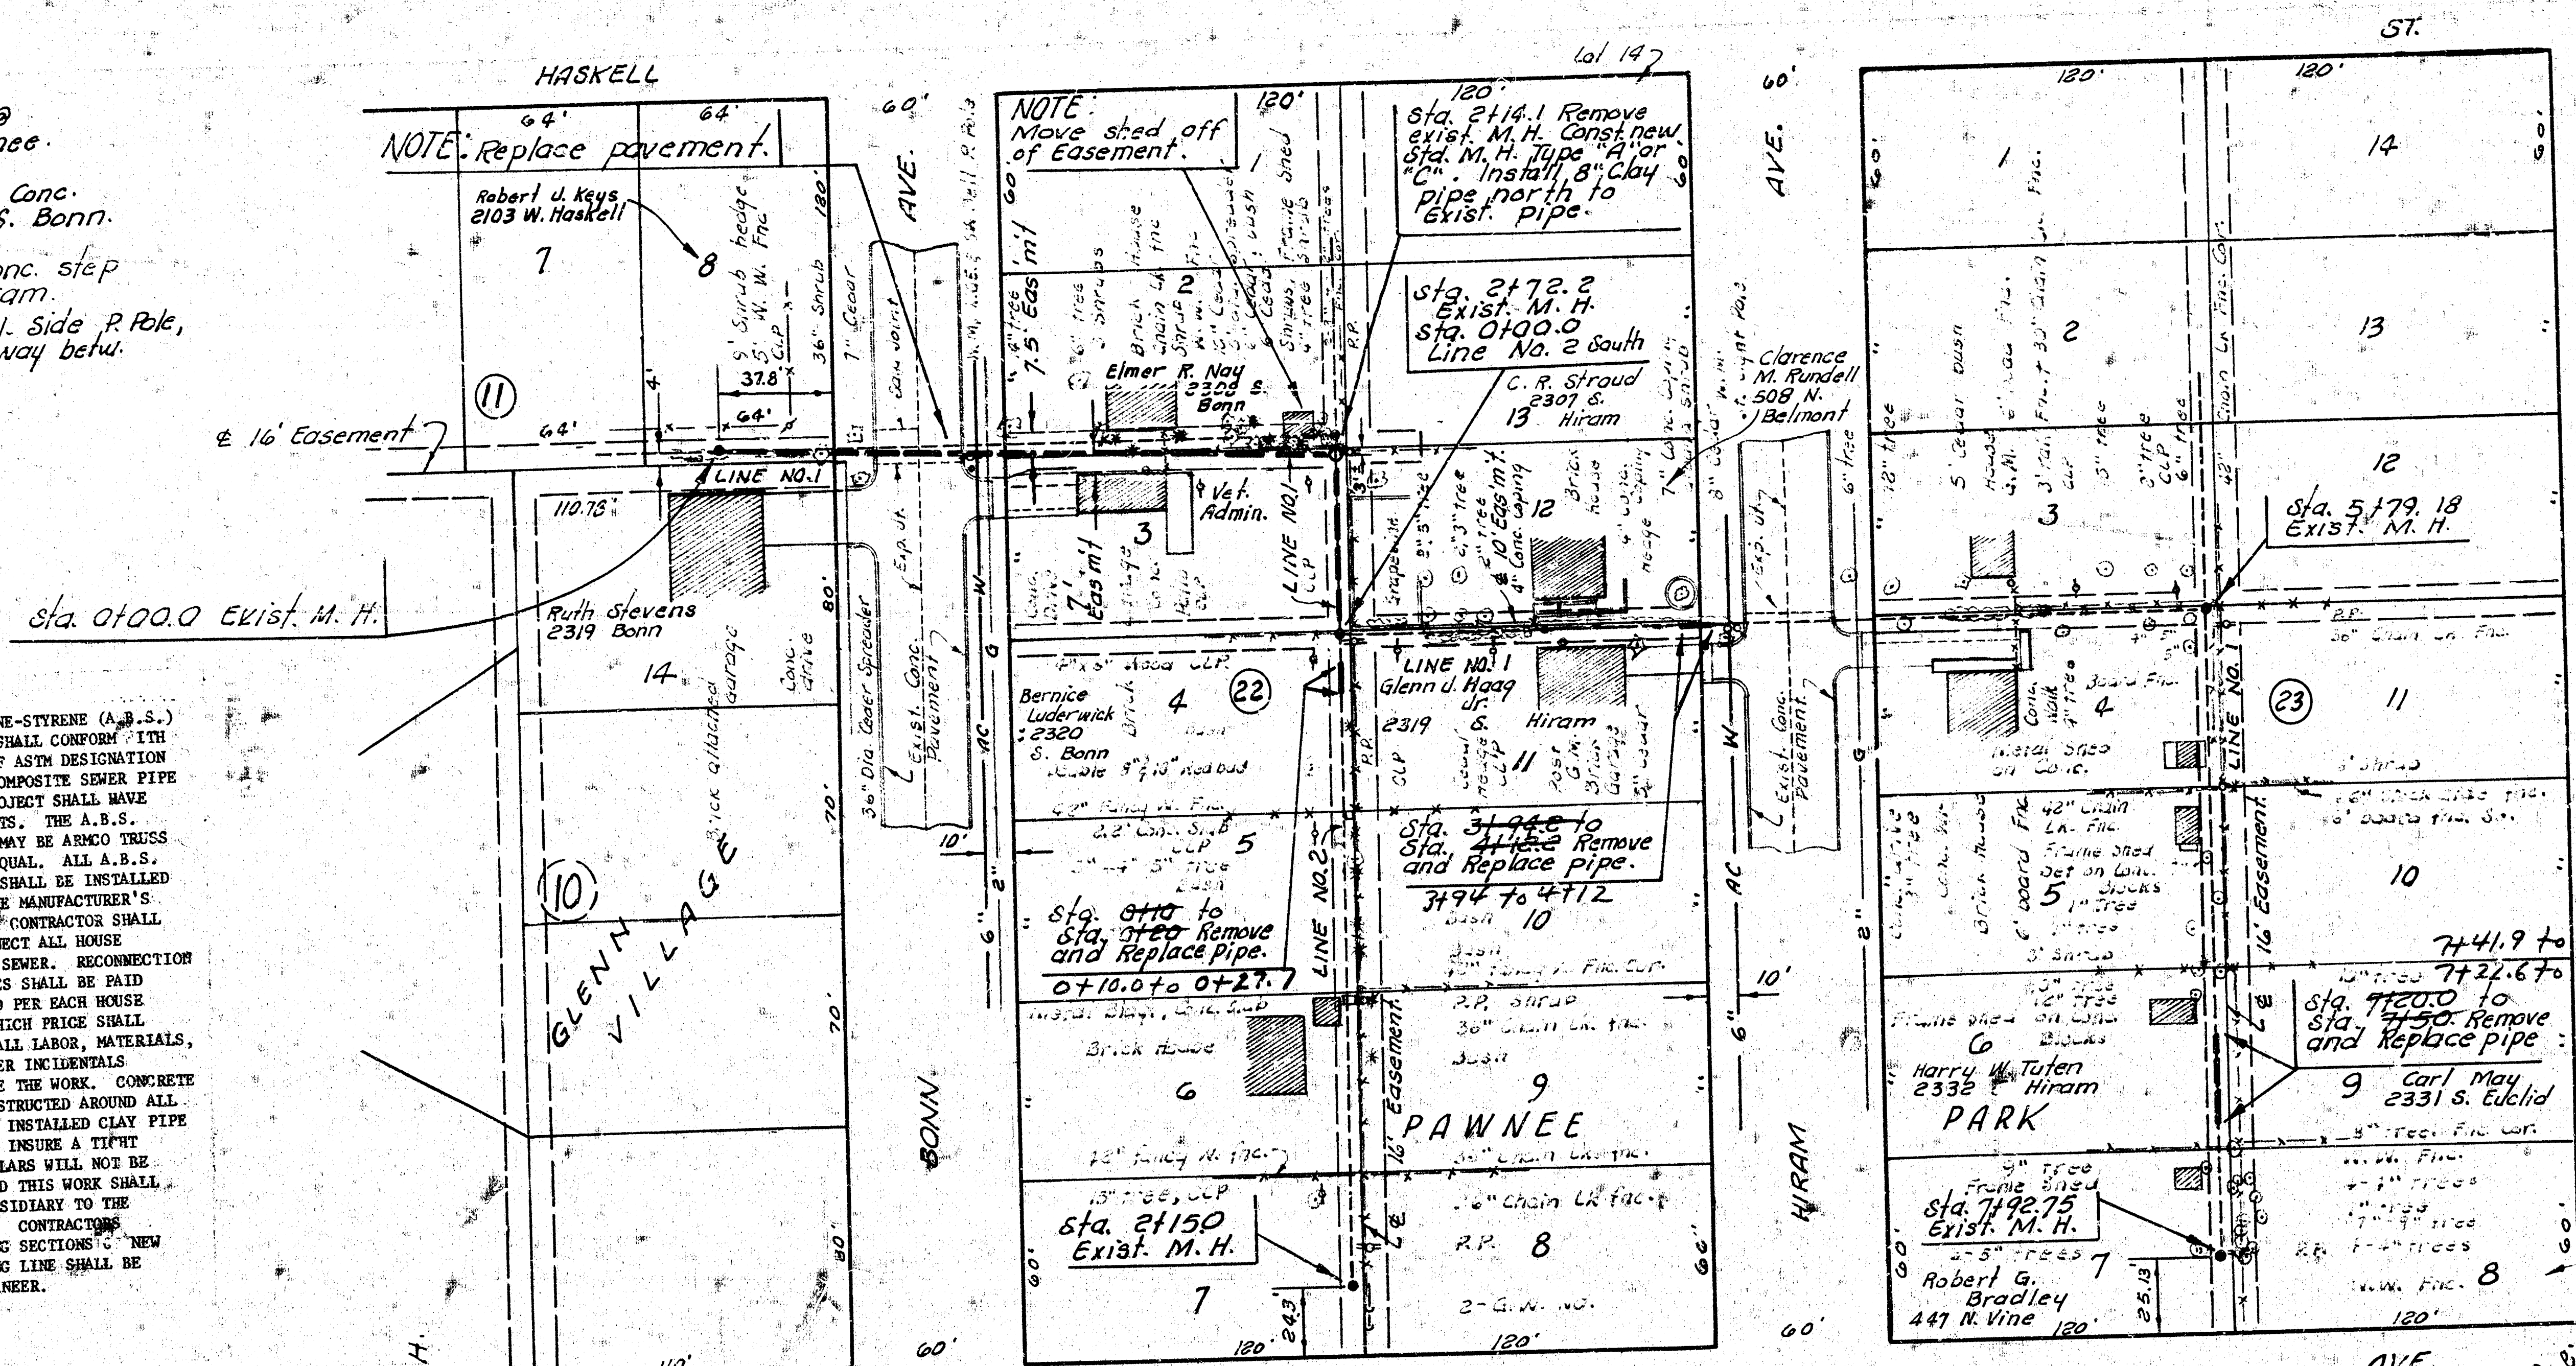


B. M. 102.07 City Std. @ Meridian & Pawnee.
 B. M. 103.15 S.E. Cor. Conc. porch Ho. # 2319 S. Bonn.
 B. M. 102.09 S.W. cor. conc. step Ho. # 2314 S. Hiram.
 B. M. 100.49 R. R. Spike N. Side R. R. N. Side Pawnee Mid-way betw. Hiram & Euclid.

NOTE: ACRYLONITRILE-BUTADIENE-STYRENE (A.B.S.) COMPOSITE SEWER PIPE SHALL CONFORM WITH THE LATEST REVISION OF ASTM DESIGNATION D 2680. ALL A.B.S. COMPOSITE SEWER PIPE FURNISHED FOR THIS PROJECT SHALL HAVE SOLVENT-CEMENTED JOINTS. THE A.B.S. COMPOSITE SEWER PIPE MAY BE ARMO TRUSS PIPE OR AN APPROVED EQUAL. ALL A.B.S. COMPOSITE SEWER PIPE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE CONTRACTOR SHALL BE REQUIRED TO RECONNECT ALL HOUSE SERVICE LINES TO THE SEWER. RECONNECTION OF HOUSE SERVICE LINES SHALL BE PAID FOR AT UNIT PRICE BID PER EACH HOUSE SERVICE CONNECTION WHICH PRICE SHALL INCLUDE THE COST OF ALL LABOR, MATERIALS, PERMITS, AND ALL OTHER INCIDENTALS NECESSARY TO COMPLETE THE WORK. CONCRETE COLLARS SHALL BE CONSTRUCTED AROUND ALL JOINTS BETWEEN NEWLY INSTALLED CLAY PIPE AND OLD CLAY PIPE TO INSURE A TIGHT JOINT. CONCRETE COLLARS WILL NOT BE PAID FOR DIRECTLY AND THIS WORK SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER ITEMS OF WORK. CONTRACTORS METHOD FOR INSTALLING SECTIONS OF NEW CLAY PIPE IN EXISTING LINE SHALL BE APPROVED BY THE ENGINEER.

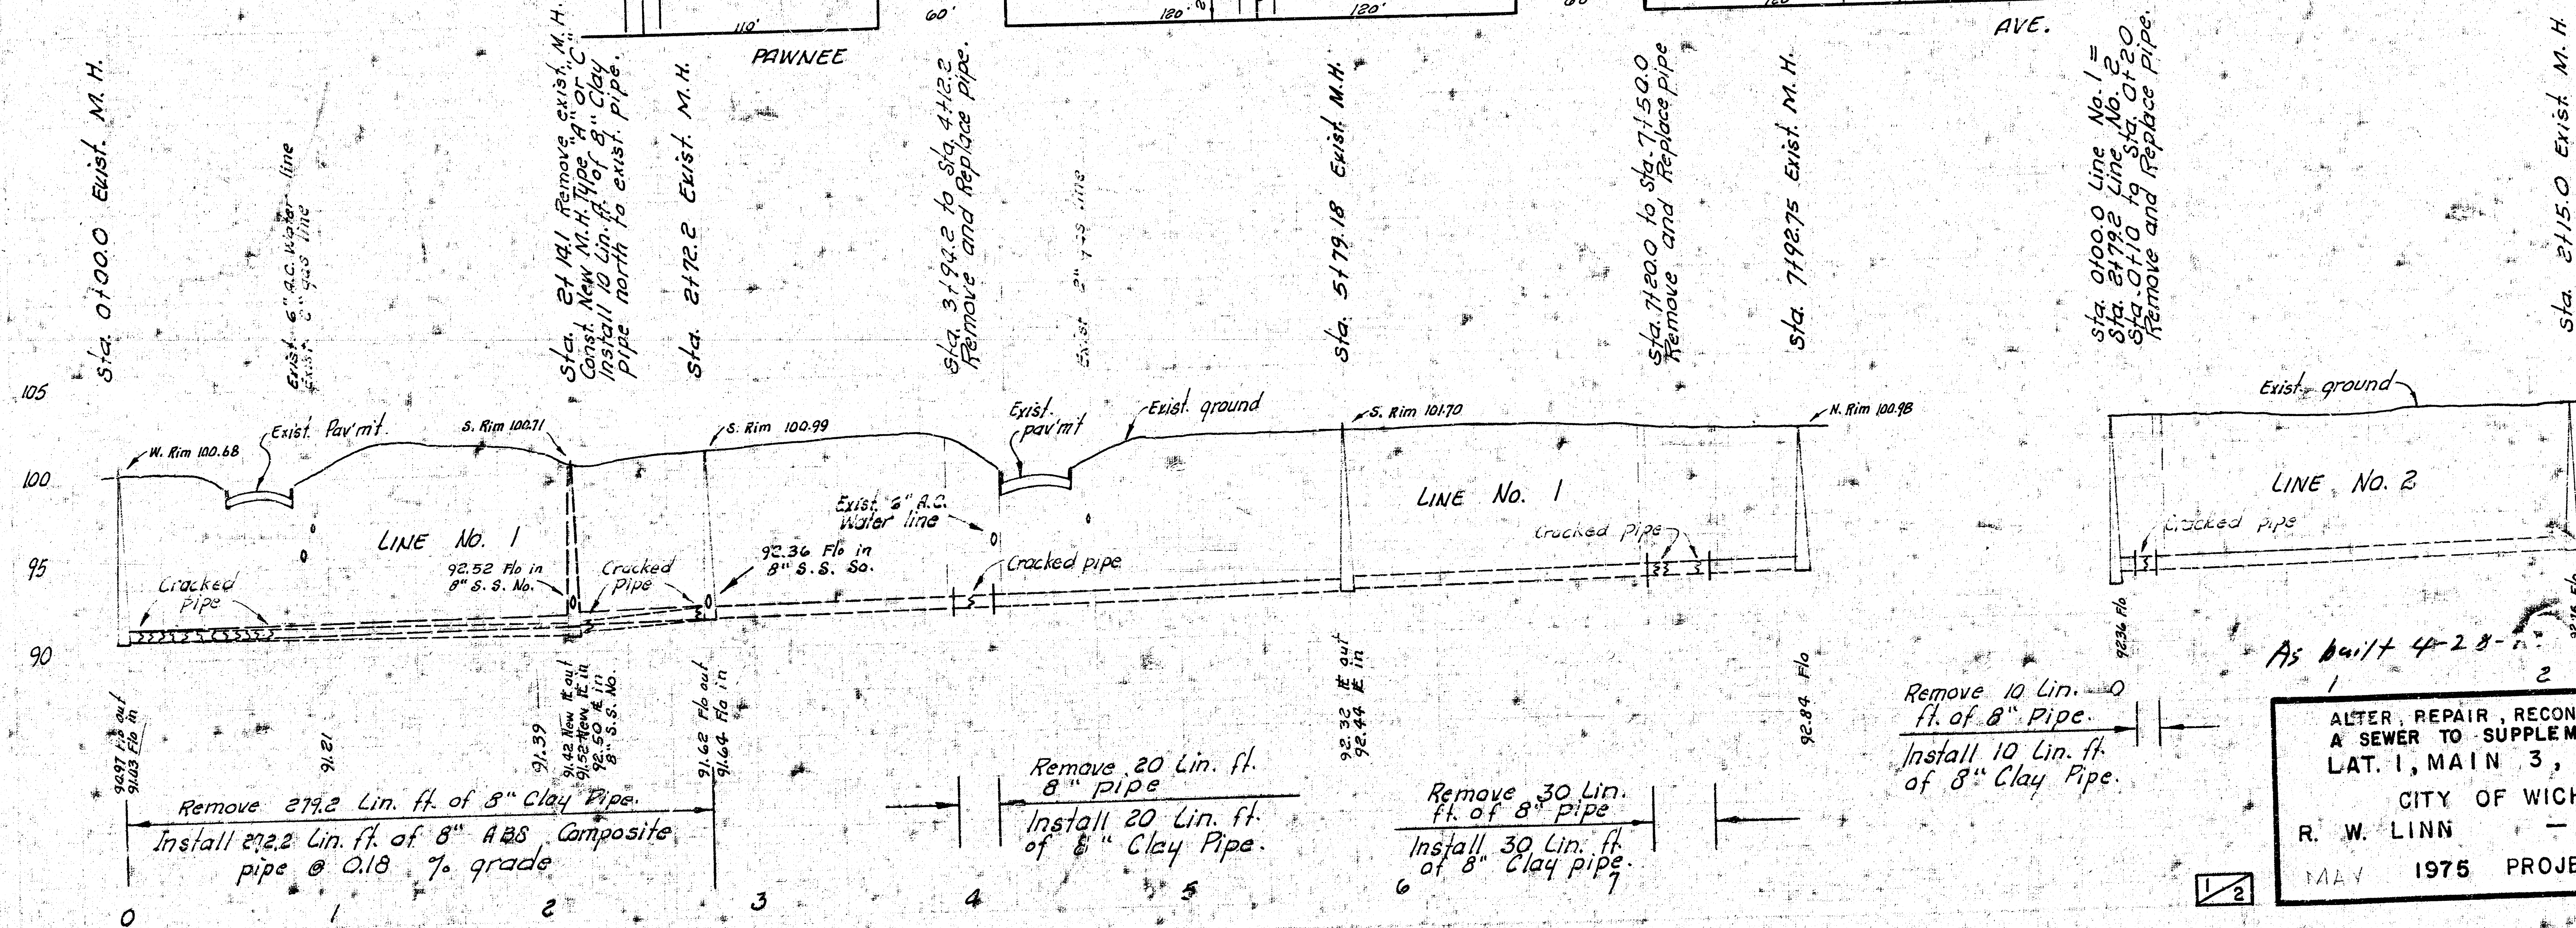

Plan Scale 1" = 40' Horiz.
 Profile Scale 1" = 5' Vert.

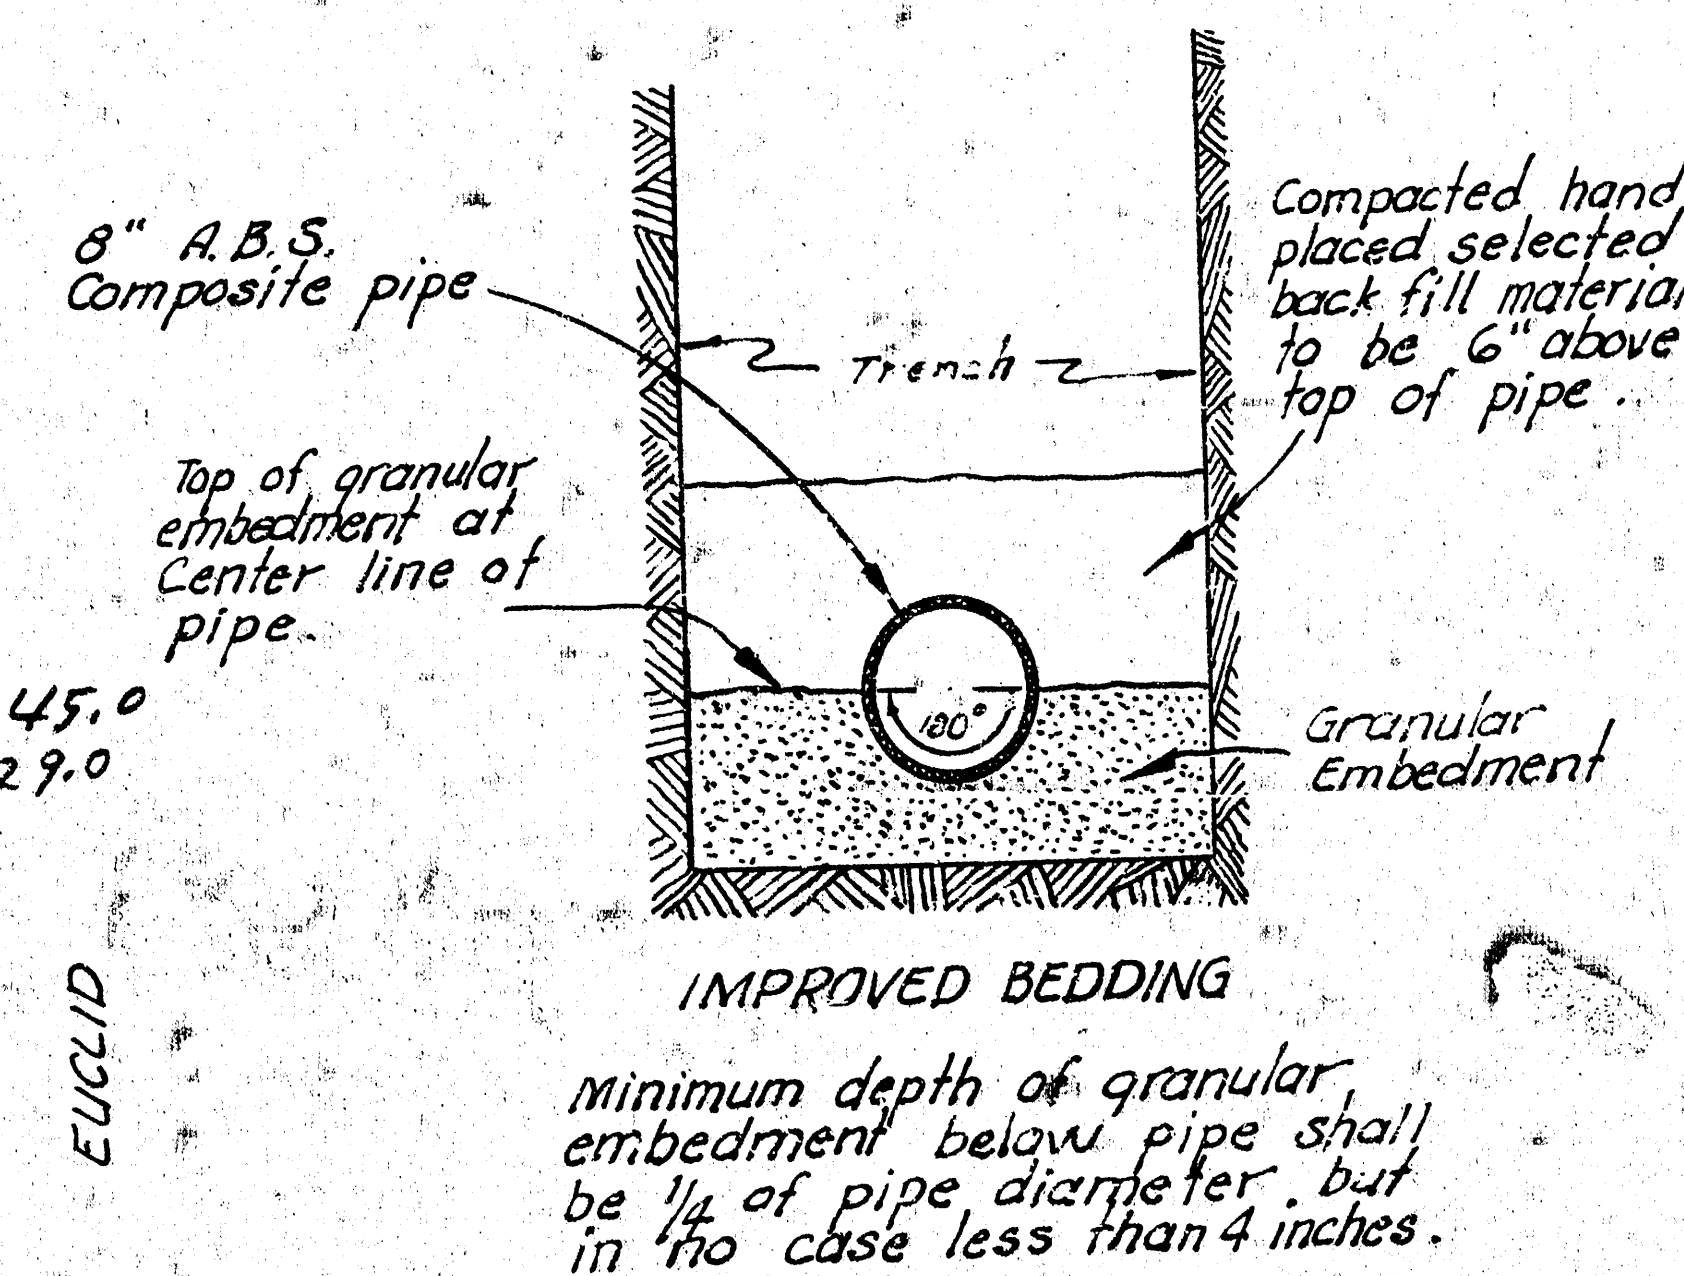

ALTER, REPAIR, RECONSTRUCT OR CONSTRUCT A SEWER TO SUPPLEMENT A PORTION OF LAT. 1, MAIN 3, S. S. NO. 22
 CITY OF WICHITA, KANSAS
 R. W. LINN — CITY ENGINEER
 MAY 1975 PROJECT NO. DBKL575022

B. M. 101.61 R.R. Spike N. side P. Pole
N. Side Pawnee Mid-way Betw.
Glenn & Vine.

